



WELCOME TO OUR TERRITORY

▶ Product folder. Tracks




www.olofsfors.com

Make your own way

ECO-Tracks™ - the original


GRIP

EX™

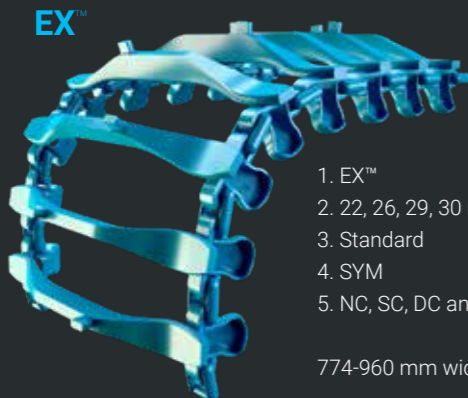


1. EX™
2. 22, 26, 29, 30 mm and Max
3. Standard
4. SYM
5. NC, SC, DC and RC

774-960 mm width




OF™

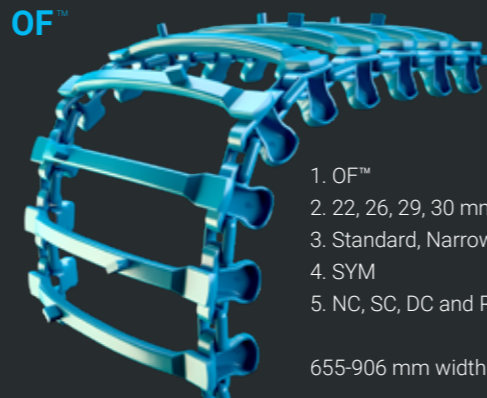


1. OF™
2. 22, 26, 29, 30 mm and Max
3. Standard, Narrow and Soft
4. SYM
5. NC, SC, DC and RC

655-906 mm width




EVO™




1. EVO™
2. 22, 26, 29, 30 mm and Max
3. Standard, Narrow and Soft
4. SYM
5. NC, SC, DC and RC

740-960 mm width




ECO™



1. ECO™
2. 22, 26, 29, 30 mm and Max
3. Standard, Narrow, Soft and Wide
4. SYM and OSS
5. NC, SC, DC and RC

615-1135 mm width




KovaX™




1. KovaX™
2. 22, 26, 29, 30 mm and Max
3. Standard, Narrow and Soft
4. SYM and OSS
5. NC, SC, DC and RC

680-950 mm width




Combination™




1. EVO-Baltic™
2. 22, 26, 29, 30 mm and Max
3. Standard, Narrow and Soft
4. SYM
5. NC, SC, DC and RC

670-960 mm width




U™

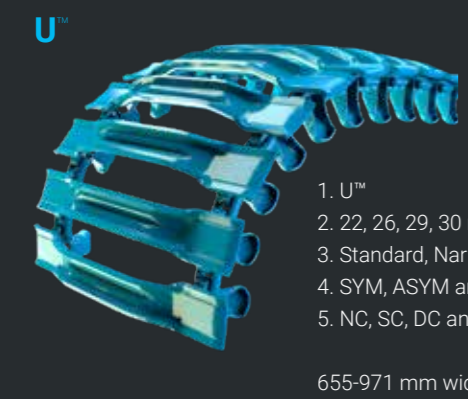


1. U™
2. 22, 26, 29, 30 mm and Max
3. Standard, Narrow and Soft
4. SYM, ASYM and OSS
5. NC, SC, DC and RC

655-971 mm width




Baltic™




1. Baltic™
2. 22, 26, 29, 30 mm and Max
3. Standard, Narrow and Soft
4. SYM, ASYM and OSS
5. NC, SC, DC and RC

650-1210 mm width




CoverX™



1. CoverX™
2. 22, 26, 29, 30 mm and Max
3. Standard, Narrow and Soft
4. SYM, ASYM and OSS
5. NC, SC and DC


670-1220 mm width



Allround


FLOTATION

1. Cross member Profile

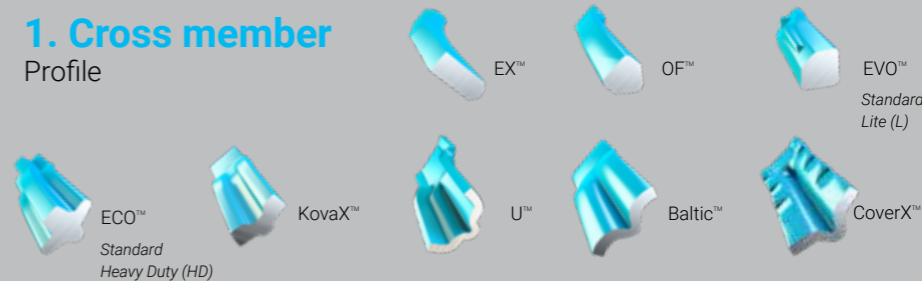

2. Link system

22 – 26 – 29 – 30 and Max

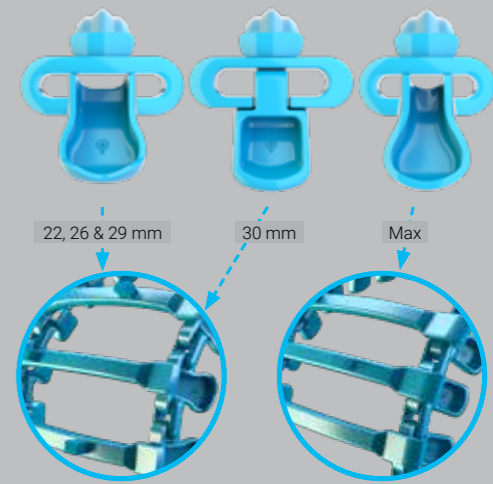


3. Version

Standard, Soft and Narrow




4. Position

SYM = Symmetric
ASYM = Asymmetric
OSS = One Side Short

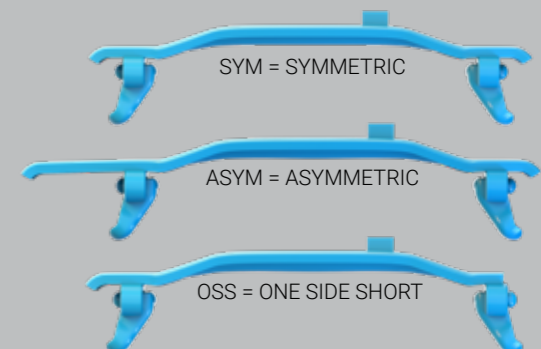


5. Cleat

NC = No Cleat
SC = Single Cleat
DC = Double Cleat
RC = Road Cleat

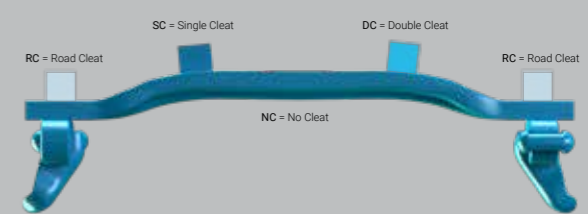





EX™

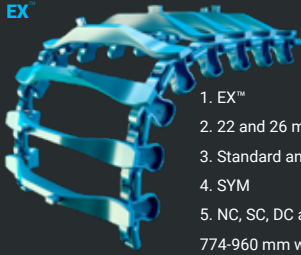


- 1. EX™
- 2. 22 and 26 mm
- 3. Standard and Narrow
- 4. SYM
- 5. NC, SC, DC and RC
- 774-960 mm width




OF™

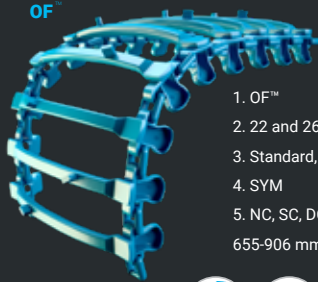


- 1. OF™
- 2. 22 and 26 mm
- 3. Standard, Narrow and Soft
- 4. SYM
- 5. NC, SC, DC and RC
- 655-906 mm width



EVO™

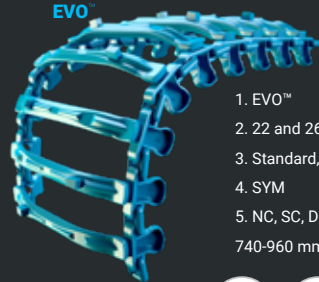

- 1. EVO™
- 2. 22 and 26 mm
- 3. Standard, Narrow and Soft
- 4. SYM
- 5. NC, SC, DC and RC
- 740-960 mm width



ECO™



- 1. ECO™
- 2. 22 and 26 mm
- 3. Standard, Narrow, Soft and Wide
- 4. SYM
- 5. NC, SC, DC and RC
- 615-1135 mm width



KovaX™




- 1. KovaX™
- 2. 22 and 26 mm
- 3. Standard, Narrow and Soft
- 4. SYM and OSS
- 5. NC, SC, DC and RC
- 680-950 mm width



Baltic™



- 1. Baltic™
- 2. 22 and 26 mm
- 3. Standard, Narrow and Soft
- 4. SYM, ASYM and OSS
- 5. NC, SC, DC and RC
- 650-1210 mm width




EX™



EVO™



Baltic™

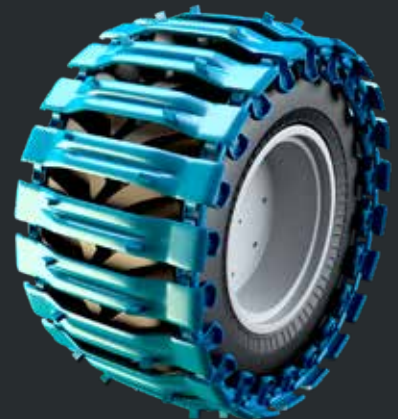

WT - Skidder

