



PRICE LIST – OLOFSFORS TRACKS
2021-04-01 – EUR



Table of Contents


Table of content	2
Benefits with using ECO-TRACKS™	3
Choose the right track for your machine	4
ECO-TRACKS™ components and description	8
Order information	10
EX™	12
OF™	16
EVO™	22
ECO™	30
KovaX™	34
Combination-OF-Baltic™	40
Combination-ECO-Baltic™	42
Combination-EVO-Baltic™ and others	44
U™	48
Baltic™	52
CoverX™	60
Long bogie™	64
Conventional tracks™	72
CTL Wheel track™	74
Skidder Wheel track™	80
PRO-Grip™	82
Parts	92
Link & Link hooks	98
Contacts	100
Welding Instruction	102
Mounting Instruction	104
Track Shortening Instruction	108
Manufacturing	110

Benefits with using ECO-TRACKS™

With Olofsfors ECO-TRACKS™ you can load more and gain better traction while at the same time, cause lower impact in forests and open land. The secret behind the benefits is in the design. Our tracks have a highly placed linkage system and a new generation of cross member with extended and curved ends.

Regardless of the machine you have, the job you need to do and how rough the terrain is, we have a track for you. A track that gives you:


- ▶ lower energy consumption
- ▶ lower ground pressure
- ▶ reduced machine and tyre wear
- ▶ better traction
- ▶ increased load capacity
- ▶ less vibrations

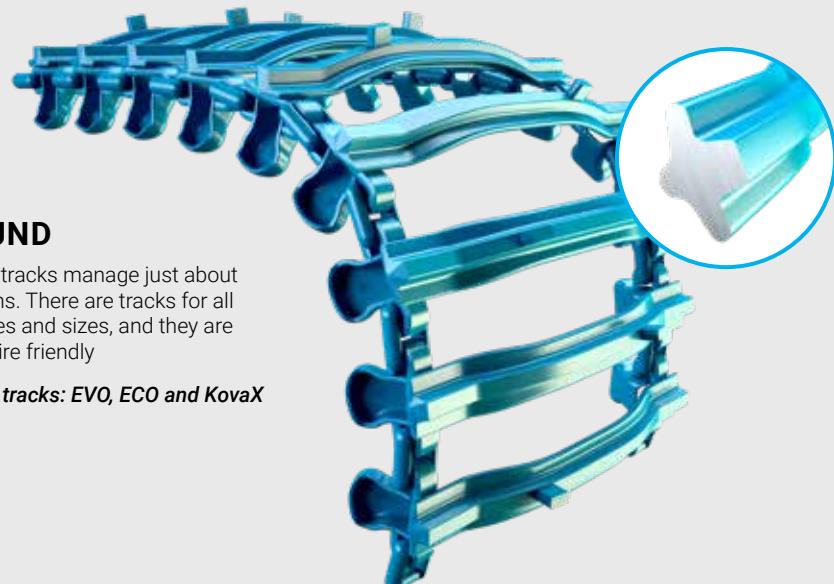

ALLROUND

Our Allround tracks manage just about any conditions. There are tracks for all machine types and sizes, and they are ground and tire friendly


Our Allround tracks: EVO, ECO and KovaX

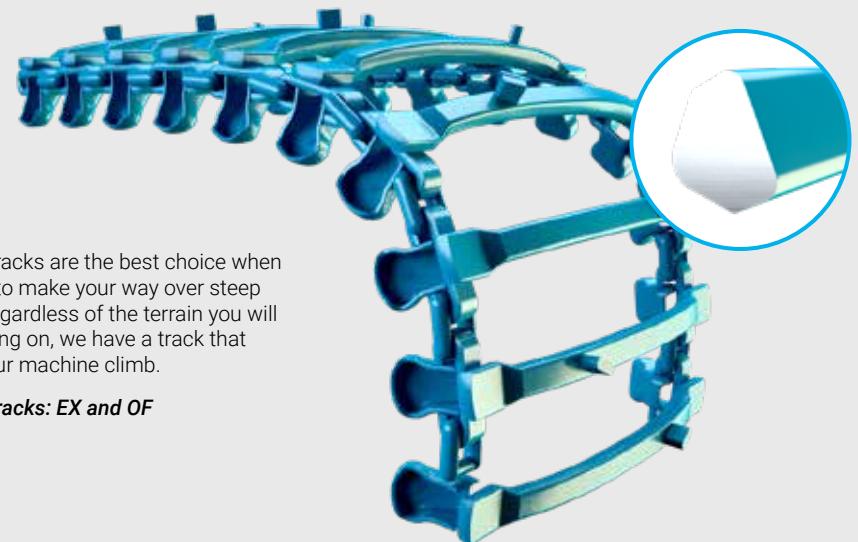

GRIP

Our Grip tracks are the best choice when you need to make your way over steep terrain. Regardless of the terrain you will be operating on, we have a track that makes your machine climb.

Our Grip tracks: EX and OF

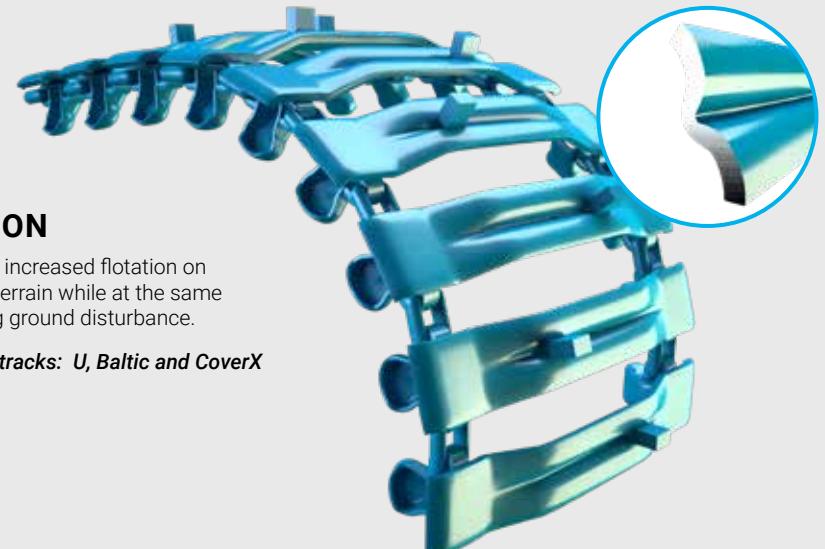

FLOTATION

They give you increased flotation on wet and soft terrain while at the same time, reducing ground disturbance.

Our Flotation tracks: U, Baltic and CoverX

Choose the right track for your machine

1. Profile - Cross Member Families

Cross member

2. Link system

22 – 26 – 29 – 30 – Max

3. Version






Standard, Soft and
Narrow

4. Position

SYM = Symmetric
ASYM = Asymmetric
OSS = One Side Short

5. Cleat

NC = No Cleat
SC = Single Cleat
DC = Double Cleat
RC = Road Cleat

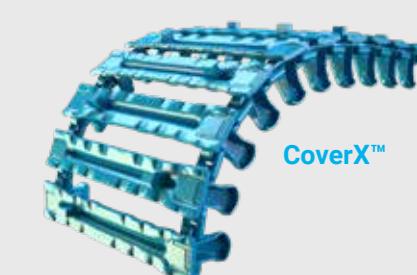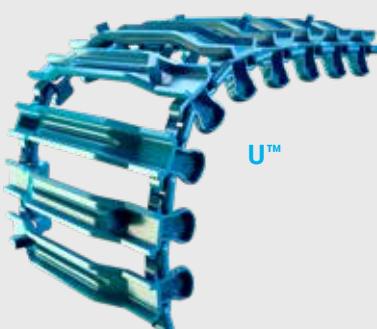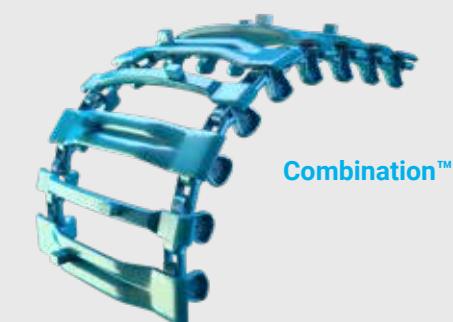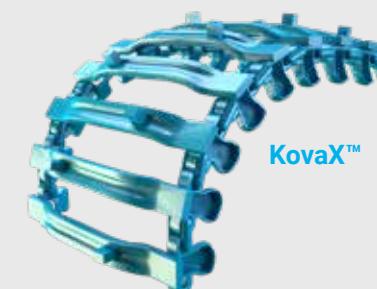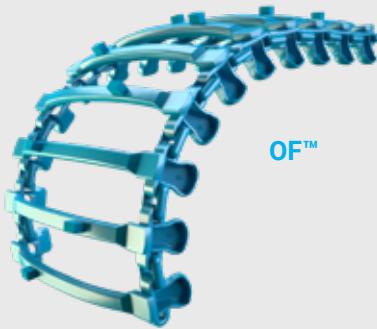


1. Profile


2. Link system



22, 26 & 29 mm

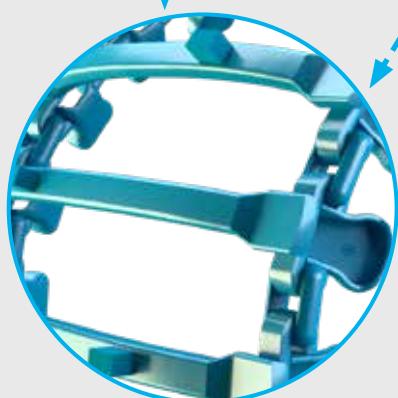

30 mm

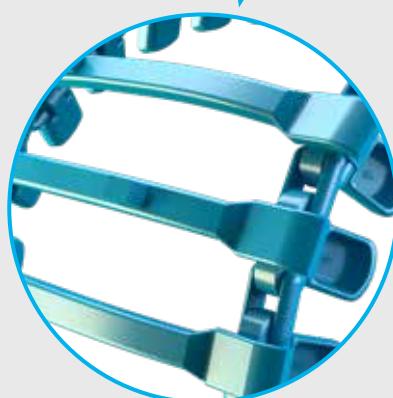

Max

3. Version



NARROW




WIDE



Choose the right track for your machine

4. Position

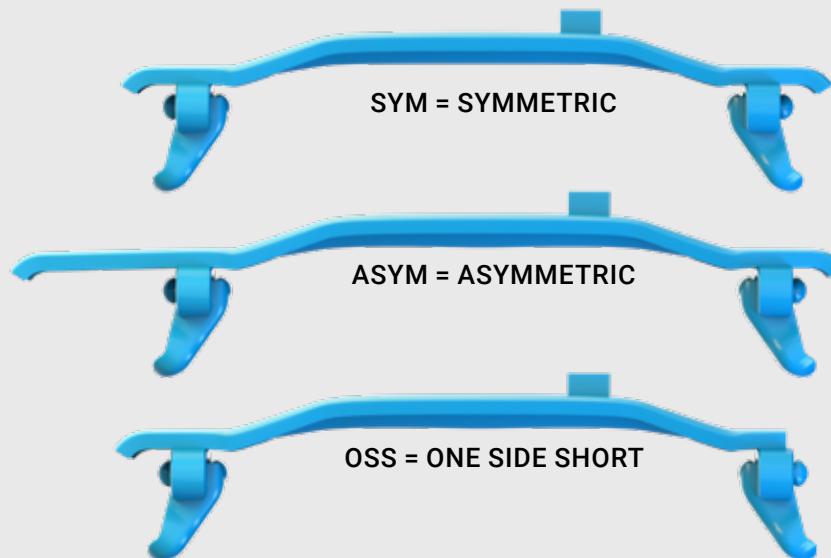

5. Cleat





GRIP




1. EX™
2. 22, 26, 29, 30 mm and Max
3. Standard
4. SYM
5. NC, SC, DC and RC

774-960 mm width

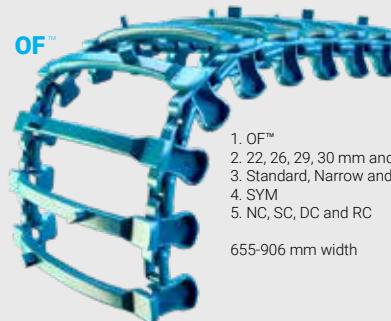


1. OF™
2. 22, 26, 29, 30 mm and Max
3. Standard, Narrow and Soft
4. SYM
5. NC, SC, DC and RC

655-906 mm width



1. EVO™
2. 22, 26, 29, 30 mm and Max
3. Standard, Narrow and Soft
4. SYM
5. NC, SC, DC and RC

740-960 mm width



1. ECO™
2. 22, 26, 29, 30 mm and Max
3. Standard, Narrow, Soft and Wide
4. SYM and OSS
5. NC, SC, DC and RC

615-1135 mm width



1. KovaX™
2. 22, 26, 29, 30 mm and Max
3. Standard, Narrow and Soft
4. SYM and OSS
5. NC, SC, DC and RC

680-950 mm width




1. EVO-Baltic™
2. 22, 26, 29, 30 mm and Max
3. Standard, Narrow and Soft
4. SYM
5. NC, SC, DC and RC

670-960 mm width




1. U™
2. 22, 26, 29, 30 mm and Max
3. Standard, Narrow and Soft
4. SYM, ASYM and OSS
5. NC, SC, DC and RC

655-971 mm width



1. Baltic™
2. 22, 26, 29, 30 mm and Max
3. Standard, Narrow and Soft
4. SYM, ASYM and OSS
5. NC, SC, DC and RC

650-1210 mm width



1. CoverX™
2. 22, 26, 29, 30 mm
3. Standard, Narrow and Soft
4. SYM, ASYM and OSS
5. NC, SC and DC


670-1220 mm width



Allround

ECO-TRACKS™ components and description

Cleat/stud

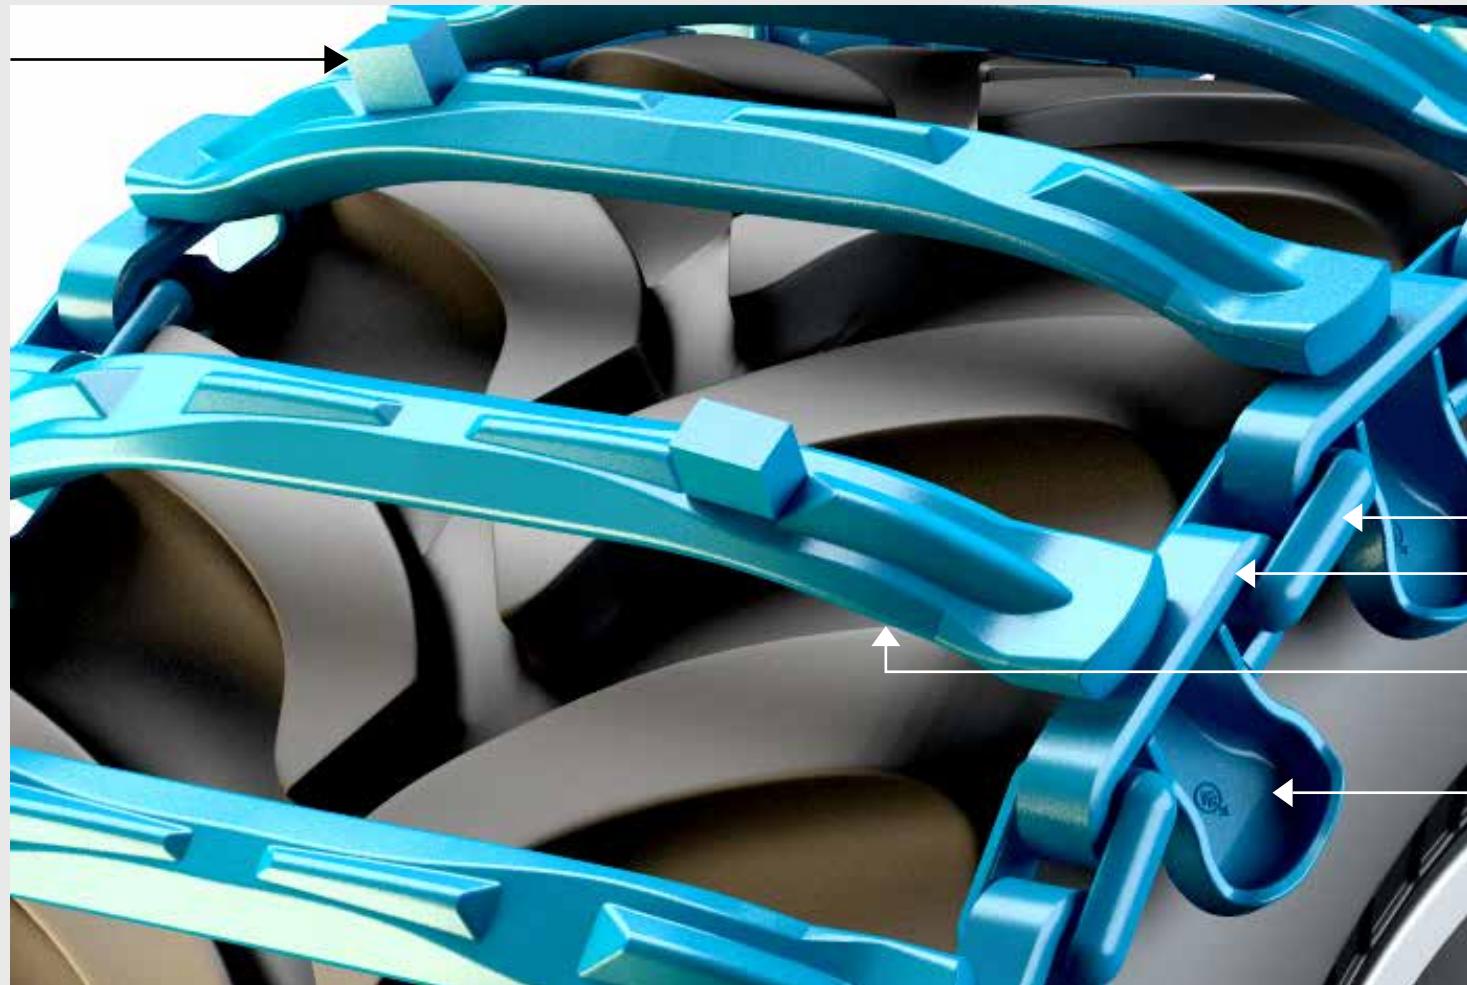

LINK

LINK HOOK

CROSS MEMBER

SIDE SUPPORT



SERIAL NUMBER PLATE

The B-distance is important to verify the track type and part number if the identification is missing or unknown.




Extension from machine, **out** (mm column)

Extension against machine, **in** (mm column)

Order information

IMPORTANT ORDER INFORMATION TO GET THE RIGHT TRACK:

1. **Tire dimension**
 2. **Tire brand and model**
 3. **Machine type and model. Check available clearance between tire and frame**
 4. **Ground conditions**
 5. **Type of use**
 6. **Select the correct mounting tool**
- (No 1-3 are required)

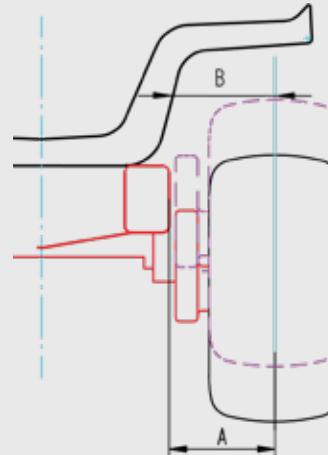

EXPLANATION OF TIRE MODELS IN THIS PUBLICATION

Nokian	Trelleborg	Alliance	Tianli	Firestone	BKT
TRS2+, FR	T404	A331	TiFF	Firestone	
FKF - Forest King F	T421	A342	TiHF	FsB	
FKF2 - Forest King F2	T422	A343	TiFG		
TRS, TRS2	T428	A344			
NM - Norman	T440	A643			
ELS	T480	A644			
LK - Logger King					

RECOMMENDED LINK SYSTEM

Machines/Maximum load	Tire rim size	Link Ø	Link hook mm
Harvesters	22.5	22	15 x 45
Harvesters	24.5	22	15 x 45
Harvesters	26.5	22	15 x 45
Harvesters	28.5	22	15 x 45
Forwarder 8 - 10 ton load	22.5	22	15 x 45
Forwarder 10 - 12 ton load	24.5, 26.5	22	15 x 45
Forwarder 10 - 15 ton load	24.5, 26.5	26 / 29	20 x 45 / 22 x 50
Forwarder 14 - 20 ton load	26.5, 28.5	26 / 29 / Max	20 x 45 / 22 x 50 / 20 x 45
Forwarder 18+ ton load	26.5, 28.5	29 / 30 / Max	20 x 50 / 30 x 50 / 20 x 45

Order and delivery information

Prices are without VAT, freight and packing material.

The price list is valid until further notice. All Track prices are for one (1) pair/set and includes track locks. **The mounting tool is purchased separately.** See mounting instruction at [www.olofsfors.com](http://www.olofsfors.com/en/video-library/?Language=English&Product+Segment=Tracks), search in our video library <http://www.olofsfors.com/en/video-library/?Language=English&Product+Segment=Tracks>

Olofsfors has two different product categories; stock products and non stock products.

Stock Products:

Delivery time within two (2) work days. Olofsfors factory stock products are marked with **blue** text. Local stock in Germany, Canada, Finland and Russia may vary, please contact each sales office for information.

Non Stock Products:

Delivery time of fifteen (15) work days after order or less.

Custom made track models will be quoted on request, approximately four (4) weeks delivery.

Terms of payment are normally 30 days net. Any remarks to the invoice must be made within 8 days after invoice date. Payment must be received on our account no later than due date. If not, interest can be charged based on applicable reference rate plus 8 percent.

Olofsfors AB

Phone: +46 930-311 40

E-mail: order@olofsfors.se

Olofsfors LLC

Phone: +7 921 790 33 03

E-mail: info.ru@olofsfors.com

Olofsfors Inc

Phone: +1 519 754 2190

Fax: +1 519 757 1100

E-mail: info@olofsfors.com

Metsätyö OY Jyväskylä

Phone: +358 14 338 8700

E-mail: info@metsatyo.fi



Track Shipping

Tracks are normally shipped in 4 rolls on one or two pallets. The joining track locks, short, medium, long (8+4+4) are mounted on the ends of the rolls.

For every set of tracks you will need the correct tightening/tensioning tool. Olofsfors have different types to offer. Please ensure that you have the right tool for your tracks. See page 94.

Olofsfors GmbH

Phone: +49 7033 32043 10

E-mail: order.gmbh@olofsfors.de

Metsätyö OY Hämeenlinna

Phone: +358 3 644 0400

E-mail: info@metsatyo.fi

Olofsfors South America

Phone: +55 11 97373 0201


E-mail: alex.lambert@olofsfors.com

Metsätyö OY Rovaniemi

Phone: +358 16 321 0100

E-mail: info@metsatyo.fi

EX™

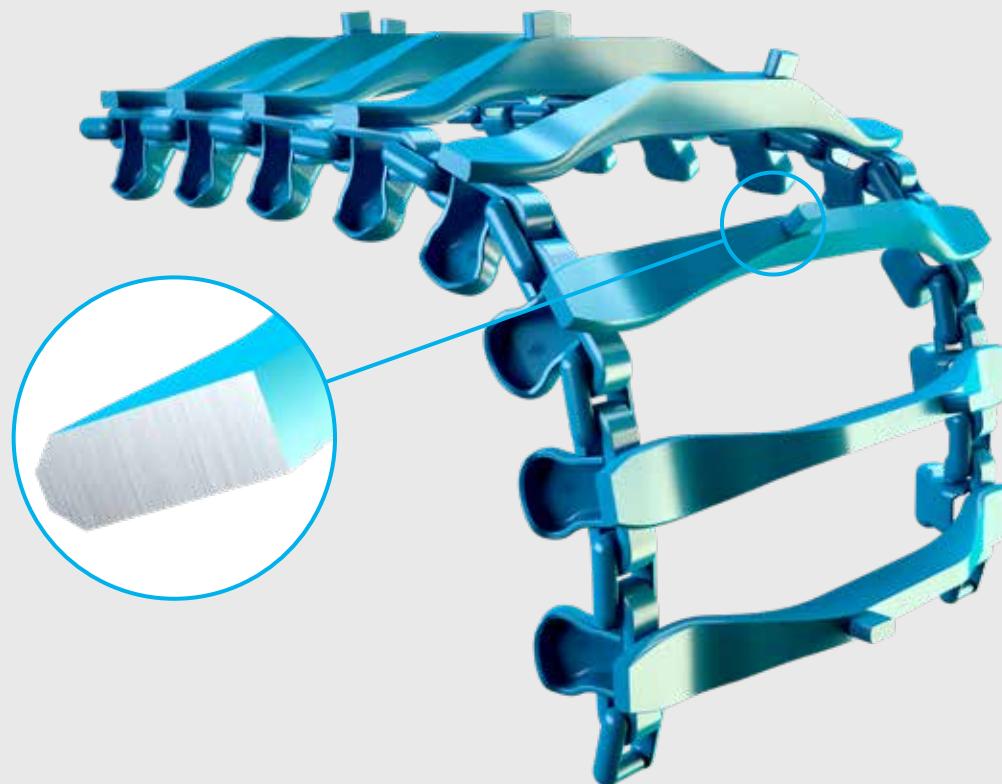

NARROW CROSS MEMBER



STANDARD CROSS MEMBER



GRIP



FLOTATION



SNOW



GRIP



FLOTATION



SNOW

EX 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EX Narrow												
190-661026	EX	Narrow	SYM	710-24.5	TRS2, T428, T440, T480, A344	774	1 430	SC	0	0	435	7 770
190-644021	EX	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	774	1 500	SC	0	0	425	9 140
190-644026	EX	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	774	1 500	SC	0	0	435	8 970
EX Standard												
190-624422	EX	Standard	SYM	600-26.5	T422	774	1 500	SC	27	27	387	9 260
190-624040	EX	Standard	SYM	600-26.5	FKF2, FR, T428, A343	774	1 500	SC	43	43	387	9 060
190-624045	EX	Standard	SYM	600-26.5	TRS, TRS2, T440, T480, A344, A644	630	1 500	SC	27	27	390	9 140
190-662720	EX	Standard	SYM	650-24.5	FR, A342, A344	774	1 430	SC	18	18	400	8 720
190-652045	EX	Standard	SYM	710-22.5	TRS, TRS2, T428, A344	866	1 300	SC	23	23	440	8 150
190-661020	EX	Standard	SYM	710-24.5	FKF, FKF2, A343	866	1 430	SC	38	38	438	9 070
190-644422	EX	Standard	SYM	710-26.5	T422	866	1 500	SC	18	18	433	9 770
190-644027	EX	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	866	1 500	DC	28	28	435	9 770
190-644025	EX	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	866	1 500	SC	28	28	435	9 510
190-644020	EX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	866	1 500	SC	38	38	433	9 440
190-680000	EX	Standard	SYM	710-28.5	FKF2	866	1 720	SC	38	38	433	10 820

EX 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EX Narrow												
290-644726	EX	Narrow	SYM	710-26.5	TRS2 Only	774	1 500	SC	0	0	404	9 820
EX Standard												
290-624020	EX	Standard	SYM	600-26.5	FKF	774	1 500	SC	48	48	387	10 300
290-624045	EX	Standard	SYM	600-26.5	TRS, TRS2, T440, T480, A344, A644	774	1 500	SC	27	27	390	10 300
290-653040	EX	Standard	SYM	650-26.5	ELS, TRS, A343, A344	774	1 500	SC	37	37	387	10 640
290-653030	EX	Standard	SYM	650-26.5	TiFF	774	1 720	SC	12	12	405	10 640
290-644422	EX	Standard	SYM	710-26.5	T422	866	1 500	SC	23	23	433	10 640
290-644020	EX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	866	1 500	SC	33	33	433	10 320
290-644025	EX	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	866	1 500	SC	26	26	438	10 510
290-680025	EX	Standard	SYM	710-28.5	TRS2, A644	866	1 720	SC	28	28	435	11 600
290-680020	EX	Standard	SYM	710-28.5	FKF2	866	1 720	SC	38	38	433	11 750
290-654071	EX	Standard	SYM	750-26.5	A643, T480	905	1 720	SC	38	38	453	12 060

Only single cleat in price list, more options available

► www.olofsfors.com

EX 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EX Standard												
290-654083	EX	Standard	SYM	750-26.5	FKF2	905	1 720	SC	18	18	465	12 080
290-654080	EX	Standard	SYM	750-26.5	FKF2	905	1 720	SC	18	18	465	12 380
290-654070	EX	Standard	SYM	750-26.5	A643, T480	866	1 720	SC	18	18	445	11 670
290-654000	EX	Standard	SYM	750-26.5	FKF, TRS, A343, A344	866	1 720	SC	33	33	433	11 320
290-654060	EX	Standard	SYM	750-26.5	T428	866	1 720	SC	23	23	440	11 670
290-654060	EX	Standard	SYM	750-30.5	T428	866	1 720	SC	23	23	440	11 670
290-663000	EX	Standard	SYM	750-26.5	TRS2	905	1 720	SC	28	28	455	12 380
290-663000	EX	Standard	SYM	780-26.5	FKF	905	1 720	SC	28	28	455	12 380
290-663001	EX	Standard	SYM	750-26.5	TRS2	866	1 720	SC	8	8	455	12 180
290-663001	EX	Standard	SYM	780-26.5	FKF	866	1 720	SC	8	8	455	12 180
290-673000	EX	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	960	1 720	SC	50	50	480	13 130
290-656020	EX	Standard	SYM	800-26.5	FKF, FKF2, T440, T480, A644	960	1 500	SC	30	30	480	11 350

EX 29 MM LINK SYSTEM


Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EX Standard												
590-644020	EX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	866	1 500	SC	33	33	433	11 560
590-654080	EX	Standard	SYM	750-26.5	FKF2	905	1 720	SC	18	18	465	13 870
590-654000	EX	Standard	SYM	750-26.5	FKF, TRS, A343, A344	866	1 720	SC	33	33	433	13 020
590-673000	EX	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	905	1 720	SC	23	23	460	14 180

EX 30 MM LINK SYSTEM


Part number	Name	Version	Position	Tire size	Tire		Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EX Standard													
490-644020	EX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644	TiHF, TiFF, FsB	866	1 500	SC	33	33	436	12 600
490-654000	EX	Standard	SYM	750-26.5	FKF, TRS, A343, A344		866	1 720	SC	33	33	436	14 250
490-654080	EX	Standard	SYM	750-26.5	FKF2		905	1 720	SC	18	18	471	14 370
490-663000	EX	Standard	SYM	750-26.5	TRS2		866	1 720	SC	8	8	461	14 110
490-663000	EX	Standard	SYM	780-26.5	FKF		866	1 720	SC	8	8	461	14 110
490-673000	EX	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644		960	1 720	SC	51	51	480	16 110
490-656020	EX	Standard	SYM	800-26.5	FKF, FKF2, T440, T480, A644		960	1 500	SC	35	35	486	13 360




OF™

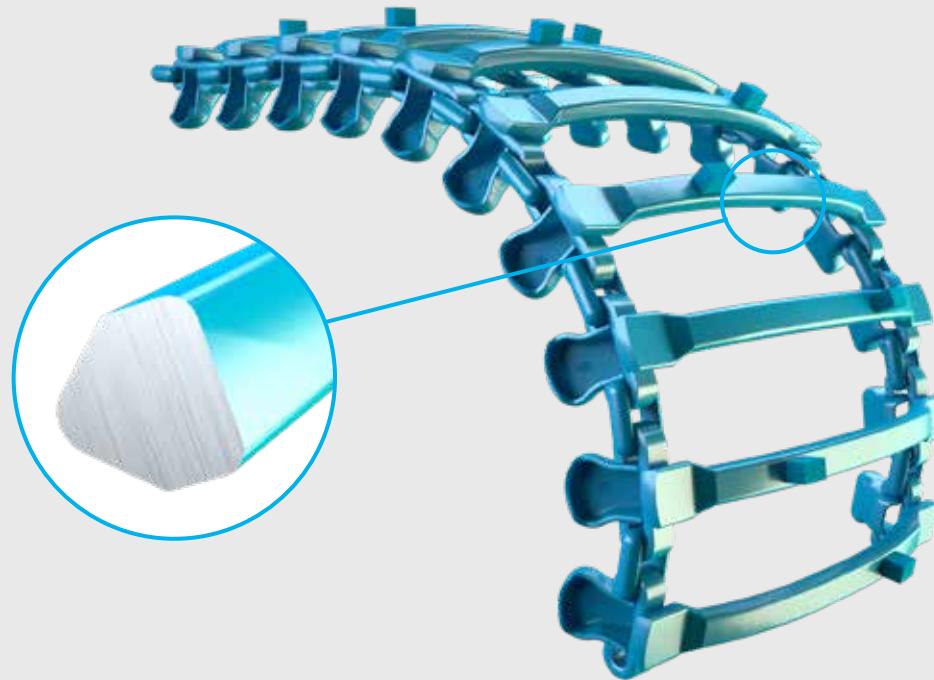


NARROW CROSS MEMBER




STANDARD CROSS MEMBER




M (STD)



M-SOFT



M-NARROW



OF 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
OF Narrow												
095-670025	OF	Narrow	SYM	600-24.5	TRS2	680	1 430	SC	0	0	355	7 560
095-652040	OF	Narrow	SYM	710-22.5	FKF, A331, A343	770	1 300	SC	0	0	425	7 570
095-652020	OF	Narrow	SYM	710-22.5	FKF2, A643, A644	770	1 300	SC	0	0	430	7 570
095-661021	OF	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	770	1 430	SC	0	0	425	7 550
095-661026	OF	Narrow	SYM	710-24.5	TRS2, T428, T440, T480, A344	770	1 430	SC	0	0	435	8 150
OF Standard												
095-616040	OF	Standard	SYM	500-22.5	T421	655	1 300	SC	23	23	327	6 650
095-616000	OF	Standard	SYM	500-22.5	A328	655	1 100	SC	23	23	335	5 620
095-640115	OF	Standard	SYM	600-22.5	FKF2, TRS, TRS2, T428, A344, A644	725	1 300	SC	8	8	385	7 130
095-640111	OF	Standard	SYM	600-22.5	ELS, T404, T423	725	1 300	SC	18	18	375	7 130
095-670000	OF	Standard	SYM	600-24.5	FR	725	1 430	SC	18	18	375	7 410
095-624045	OF	Standard	SYM	600-26.5	TRS, TRS2, T440, T480, A344, A644	725	1 500	SC	8	8	385	8 050
095-624040	OF	Standard	SYM	600-26.5	FKF2, FR, T428, A343	725	1 500	SC	18	18	375	7 940
095-624020	OF	Standard	SYM	600-26.5	FKF	725	1 500	SC	28	28	365	7 940
095-653020	OF	Standard	SYM	650-26.5	ELS, TRS, A343, A344	725	1 720	SC	18	18	375	8 930
095-652021	OF	Standard	SYM	710-22.5	FKF2	840	1 300	SC	20	20	430	7 430
095-652045	OF	Standard	SYM	710-22.5	TRS, TRS2, T428, A344	850	1 300	SC	25	25	430	7 480
095-661025	OF	Standard	SYM	710-24.5	TRS2, T428, T440, T480, A344	840	1 430	SC	15	15	435	8 050
095-661020	OF	Standard	SYM	710-24.5	FKF, FKF2, A343, A644	840	1 430	SC	25	25	425	8 050
095-644422	OF	Standard	SYM	710-26.5	T422	850	1 500	SC	10	10	445	8 420
095-644025	OF	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	840	1 500	SC	15	15	435	8 420
095-644020	OF	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FSB	840	1 500	SC	25	25	425	8 380
095-644040	OF	Standard	SYM	710-26.5	Firestone, BKT	800	1 500	SC	25	25	405	8 930
095-654000	OF	Standard	SYM	750-26.5	FKF, TRS, A343, A344	840	1 720	SC	20	20	430	9 430
095-654060	OF	Standard	SYM	750-26.5	T428	850	1 720	SC	20	20	435	9 720
095-654060	OF	Standard	SYM	750-30.5	T428	850	1 720	SC	20	20	435	9 720

OF 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
OF Narrow												

295-670025	OF	Narrow	SYM	600-24.5	TRS2	680	1 430	SC	0	0	340	8 280
295-624041	OF	Narrow	SYM	600-26.5	FKF2, FR, T428, A343	655	1 500	SC	0	0	375	8 340

Only single cleat in price list, more options available

OF 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
OF Narrow												
295-661022	OF	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	780	1 430	SC	0	0	425	8 660
295-644021	OF	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	770	1 500	SC	0	0	430	9 270
295-644027	OF	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	780	1 500	SC	0	0	435	9 330
295-654080	OF	Narrow	SYM	750-26.5	FKF2	840	1 720	SC	0	0	465	10 300
295-663000	OF	Narrow	SYM	750-26.5	TRS2	820	1 720	SC	0	0	455	10 140
295-663000	OF	Narrow	SYM	780-26.5	FKF	820	1 720	SC	0	0	455	10 140
295-673000	OF	Narrow	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	840	1 720	SC	0	0	465	10 300
OF Standard												
295-624045	OF	Standard	SYM	600-26.5	TRS, TRS2, T440, T480, A344, A644	750	1 500	SC	20	20	385	9 020
295-624042	OF	Standard	SYM	600-26.5	FKF2, FR, T428, A343	750	1 500	SC	30	30	375	9 180
295-624040	OF	Standard	SYM	600-26.5	FKF2, FR, T428, A343	750	1 500	SC	30	30	375	8 930
295-624020	OF	Standard	SYM	600-26.5	FKF	725	1 500	SC	28	28	365	8 930
295-653020	OF	Standard	SYM	650-26.5	ELS, TRS, A343, A344	725	1 720	SC	18	18	375	9 870
295-653030	OF	Standard	SYM	650-26.5	TiFF	770	1 720	SC	10	10	405	10 300
295-661025	OF	Standard	SYM	710-24.5	TRS2, T428, T440, T480, A344	840	1 430	SC	10	10	440	9 030
295-644422	OF	Standard	SYM	710-26.5	T422	850	1 500	SC	15	15	425	9 580
295-644020	OF	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1 500	SC	20	20	430	9 400
295-644025	OF	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	850	1 500	SC	20	20	435	9 580
295-644041	OF	Standard	SYM	710-26.5	Firestone, BKT	840	1 500	SC	25	25	425	9 400
295-680025	OF	Standard	SYM	710-28.5	TRS2, A644	850	1 720	SC	20	20	435	11 010
295-654040	OF	Standard	SYM	710-30.5	T428	820	1 720	SC	20	20	420	10 270
295-654000	OF	Standard	SYM	750-26.5	FKF, TRS, A343, A344	840	1 720	SC	20	20	430	10 300
295-663000	OF	Narrow	SYM	750-26.5	TRS2	820	1 720	SC	0	0	455	10 140
295-663000	OF	Narrow	SYM	780-26.5	FKF	820	1 720	SC	0	0	455	10 140

OF 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
OF Soft												
295-644032	OF	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1 520	SC	53	53	453	9 230

OF 29 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
OF Narrow												
595-644021	OF	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	770	1 500	SC	0	0	430	10 380
595-654080	OF	Narrow	SYM	750-26.5	FKF2	840	1 720	SC	0	0	418	11 540
595-673000	OF	Narrow	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	840	1 720	SC	0	0	465	11 540
OF Standard												
595-644020	OF	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1 500	SC	20	20	430	10 530
595-654000	OF	Standard	SYM	750-26.5	FKF, TRS, A343, A344	840	1 720	SC	20	20	430	11 540

OF 30 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
OF Standard												
495-654000	OF	Standard	SYM	750-26.5	FKF, TRS, A343, A344	840	1 720	SC	20	20	436	13 360
OF Soft												
495-644020	OF	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1 500	SC	53	53	453	12 040

OF MAX LINK SYSTEM


Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
OF Narrow												
395-661020	OF	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	770	1 430	SC	0	0	419	11 510
395-644026	OF	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	800	1 500	SC	0	0	429	12 180
395-654081	OF	Narrow	SYM	750-26.5	FKF2	840	1 720	SC	0	0	454	13 370
395-663000	OF	Narrow	SYM	750-26.5	TRS2	820	1 720	SC	0	0	444	13 910
395-663000	OF	Narrow	SYM	780-26.5	FKF	820	1 720	SC	0	0	444	13 910
395-673000	OF	Narrow	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	840	1 720	SC	0	0	454	14 490

OF MAX LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
OF Standard												
395-670025	OF	Standard	SYM	600-24.5	TRS2	750	1 430	SC	15	15	382	11 550
395-624000	OF	Standard	SYM	600-26.5	FKF2, FR, T428, A343	725	1 500	SC	13	13	369	12 250
395-661025	OF	Standard	SYM	710-24.5	TRS2, T428, T440, T480, A344	840	1 430	SC	10	10	429	11 610
395-644000	OF	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1 500	SC	20	20	420	12 310
395-654041	OF	Standard	SYM	710-30.5	T428	840	1 720	SC	30	30	420	13 650
395-654000	OF	Standard	SYM	750-26.5	FKF, TRS, A343, A344	840	1 720	SC	15	15	424	13 650
OF Soft												
395-661000	OF	Soft	SYM	710-24.5	FKF, FKF2, A343, A644	906	1 430	SC	58	58	453	12 380
395-644025	OF	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	906	1 500	SC	48	48	453	13 190
395-644020	OF	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1 500	SC	58	58	453	12 930
395-680020	OF	Soft	SYM	710-28.5	FKF2	906	1 720	SC	53	53	453	14 810
395-654040	OF	Soft	SYM	710-30.5	T428	906	1 720	SC	68	68	453	13 910
395-654020	OF	Soft	SYM	750-26.5	FKF, TRS, A343, A344	906	1 720	SC	53	53	453	13 910
395-654050	OF	Soft	SYM	750-26.5	T428	906	1 720	SC	43	43	453	14 670
395-654050	OF	Soft	SYM	750-30.5	T428	906	1 720	SC	43	43	453	14 670



EVO™

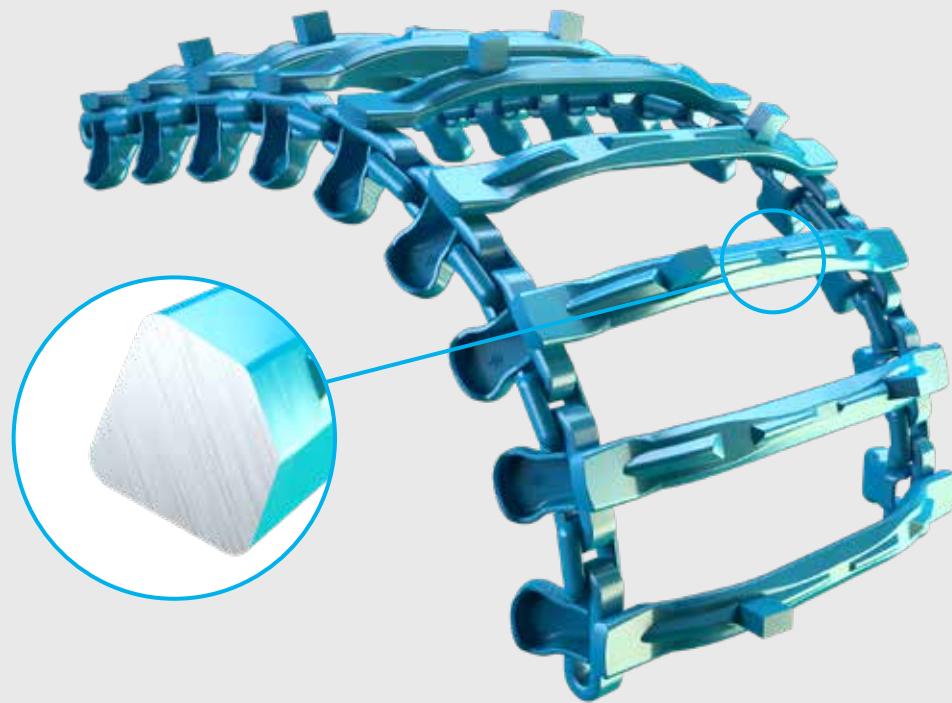

NARROW CROSS
MEMBER



GRIP FLOTATION SNOW



STANDARD CROSS
MEMBER



GRIP FLOTATION SNOW



SOFT CROSS
MEMBER



GRIP FLOTATION SNOW



M (STD)



GRIP FLOTATION SNOW



M-SOFT



GRIP FLOTATION SNOW

EVO 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EVO Narrow												
094-670026	EVO	Narrow	SYM	600-24.5	TRS2	695	1 430	SC	0	0	360	7 500
094-652020	EVO	Narrow	SYM	710-22.5	FKF2, A643, A644	775	1 300	SC	0	0	430	7 640
094-652040	EVO	Narrow	SYM	710-22.5	FKF, A331, A343	775	1 300	SC	0	0	425	7 640
094-652045	EVO	Narrow	SYM	710-22.5	TRS, TRS2, T428, A344	800	1 300	SC	0	0	440	7 770
094-661020	EVO	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	775	1 430	SC	0	0	425	8 150
094-661025	EVO	Narrow	SYM	710-24.5	TRS2, T428, T440, T480, A344	775	1 430	SC	0	0	435	8 150
094-644022	EVO	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	775	1 500	SC	0	0	430	8 690
094-644025	EVO	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	800	1 500	SC	0	0	440	8 930
094-654000	EVO	Narrow	SYM	750-26.5	FKF, TRS, A343, A344	775	1 720	SC	0	0	430	9 980
EVO Standard												
094-640115	EVO	Standard	SYM	600-22.5	FKF2, TRS, TRS2, T428, A344, A644	740	1 300	SC	10	10	390	7 350
094-640020	EVO	Standard	SYM	600-22.5	ELS, T404, T423	740	1 300	SC	20	20	380	7 350
094-624422	EVO	Standard	SYM	600-26.5	T422	775	1 500	SC	23	23	395	8 560
094-624045	EVO	Standard	SYM	600-26.5	TRS, TRS2, T440, T480, A344, A644	775	1 500	SC	28	28	390	8 560
094-624040	EVO	Standard	SYM	600-26.5	FKF2, FR, T428, A343	740	1 500	SC	20	20	380	8 560
094-624020	EVO	Standard	SYM	600-26.5	FKF	740	1 500	SC	30	30	370	8 560
094-653080	EVO	Standard	SYM	620-30.5	T428	775	1 720	SC	33	33	388	9 960
094-653041	EVO	Standard	SYM	650-26.5	ELS, TRS, A343, A344	740	1 720	SC	20	20	380	9 790
094-674000	EVO	Standard	SYM	700-26	BEL 194	800	1 500	SC	25	25	405	9 070
094-644020	EVO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1 500	SC	20	20	430	8 690
094-644422	EVO	Standard	SYM	710-26.5	T422	870	1 500	SC	23	23	435	9 310
EVO Soft												
094-652041	EVO	Soft	SYM	710-22.5	FKF, A331, A343	906	1 300	SC	58	58	453	8 390
094-644026	EVO	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	906	1 500	SC	43	43	453	9 640
094-644021	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1 500	SC	53	53	453	9 640
094-680000	EVO	Soft	SYM	710-28.5	FKF2	906	1 720	SC	58	58	453	10 770

EVO 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EVO Narrow												
294-624041	EVO	Narrow	SYM	600-26.5	FKF2, FR, T428, A343	695	1 500	SC	0	0	380	8 790
294-653030	EVO	Narrow	SYM	650-26.5	TiFF	740	1 720	SC	0	0	405	10 880
294-652040	EVO	Narrow	SYM	710-22.5	FKF, A331, A343	775	1 300	SC	0	0	425	8 400
294-661020	EVO	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	775	1 430	SC	0	0	430	9 050
294-644022	EVO	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	775	1 500	SC	0	0	430	9 510
294-644026	EVO	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	800	1 500	SC	0	0	440	9 510
294-644040	EVO	Narrow	SYM	710-26.5	Firestone, BKT	740	1 500	SC	0	0	408	9 770
294-680026	EVO	Narrow	SYM	710-28.5	FKF2	800	1 720	SC	0	0	435	11 320
294-680001	EVO	Narrow	SYM	710-28.5	FKF2	775	1 720	SC	0	0	425	11 190
294-654040	EVO	Narrow	SYM	710-30.5	T428	750	1 720	SC	0	0	420	10 800
294-673002	EVO	Narrow	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	850	1 720	SC	0	0	465	11 500
294-656731	EVO	Narrow	SYM	800-26.5	TRS2, A344	884	1 500	SC	0	0	485	10 510
EVO Standard												
294-624040	EVO	Standard	SYM	600-26.5	FKF2, FR, T428, A343	740	1 500	SC	20	20	380	9 150
294-624020	EVO	Standard	SYM	600-26.5	FKF	740	1 500	SC	30	30	370	9 150
294-653040	EVO	Standard	SYM	650-26.5	ELS, TRS, A343, A344	740	1 720	SC	20	20	380	10 760
294-674000	EVO	Standard	SYM	700-26	BEL 194	800	1 500	SC	25	25	405	10 130
294-652020	EVO	Standard	SYM	710-22.5	FKF2, A643, A644	840	1 300	SC	20	20	430	8 460
294-661025	EVO	Standard	SYM	710-24.5	TRS2, T428, T440, T480, A344	840	1 430	SC	10	10	440	9 050
294-661022	EVO	Standard	SYM	710-24.5	FKF, FKF2, A343, A644	840	1 430	SC	20	20	430	9 050
294-644028	EVO	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	840	1 500	SC	10	10	440	9 930
294-644020	EVO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1 500	SC	20	20	425	9 510
294-644422	EVO	Standard	SYM	710-26.5	T422	870	1 500	SC	25	25	435	10 130
294-654080	EVO	Standard	SYM	750-26.5	FKF2	915	1 720	SC	25	25	465	11 350
294-654000	EVO	Standard	SYM	750-26.5	FKF, TRS, A343, A344	840	1 720	SC	20	20	430	10 730
294-654070	EVO	Standard	SYM	750-26.5	T480, A643	870	1 720	SC	20	20	445	11 340
294-654060	EVO	Standard	SYM	750-26.5	T428	870	1 720	SC	25	25	440	11 320
294-654060	EVO	Standard	SYM	750-30.5	T428	870	1 720	SC	25	25	440	11 320
294-663000	EVO	Standard	SYM	750-26.5	TRS2	884	1 720	SC	20	20	455	11 350
294-663000	EVO	Standard	SYM	780-26.5	FKF	884	1 720	SC	20	20	455	11 350

EVO 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EVO Standard												
294-673000	EVO	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	915	1 720	SC	25	25	465	11 570
294-656021	EVO	Standard	SYM	800-26.5	FKF, FKF2, T440, T480, A644	915	1 500	SC	15	15	480	10 800
EVO Soft												
294-644021	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1 500	SC	55	55	453	10 130
294-644023	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	960	1 500	SC	80	80	480	10 530
294-644025	EVO	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	906	1 500	SC	43	43	453	10 130
294-680027	EVO	Soft	SYM	710-28.5	TRS2, A644	906	1 720	SC	50	50	453	12 040
294-680000	EVO	Soft	SYM	710-28.5	FKF2	906	1 720	SC	60	60	453	11 510
294-654081	EVO	Soft	SYM	750-26.5	FKF2	960	1 720	SC	45	45	480	11 820
294-654020	EVO	Soft	SYM	750-26.5	FKF, TRS, A343, A344	906	1 720	SC	55	55	453	11 320
294-663001	EVO	Soft	SYM	750-26.5	TRS2	960	1 720	SC	55	55	480	11 820
294-663001	EVO	Soft	SYM	780-26.5	FKF	960	1 720	SC	55	55	480	11 820
294-673001	EVO	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	960	1 720	SC	45	45	480	12 060
294-656030	EVO	Soft	SYM	800-26.5	TRS2, A344	960	1 500	SC	20	20	490	11 130
294-656020	EVO	Soft	SYM	800-26.5	FKF, FKF2, T440, T480, A644	960	1 500	SC	30	30	480	11 120
294-677000	EVO	Soft	SYM	870-26.5	A344	960	1 500	SC	15	15	498	11 750

EVO 29 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EVO Narrow												
594-644022	EVO	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	775	1 500	SC	0	0	430	10 660
594-673002	EVO	Narrow	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	850	1 720	SC	0	0	465	12 920
EVO Standard												
594-680001	EVO	Standard	SYM	710-28.5	FKF2	840	1 720	SC	25	25	425	12 540
594-654000	EVO	Standard	SYM	750-26.5	FKF, TRS, A343, A344	840	1 720	SC	20	20	430	12 020
594-654080	EVO	Standard	SYM	750-26.5	FKF2	915	1 720	SC	23	23	465	12 720
594-673000	EVO	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	915	1 720	SC	23	23	465	13 130
594-644020	EVO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1 500	SC	20	20	430	11 030
594-663000	EVO	Standard	SYM	750-26.5	TRS2	884	1 720	SC	17	17	455	12 720
594-663000	EVO	Standard	SYM	780-26.5	FKF	884	1 720	SC	17	17	455	12 720

Only single cleat in price list, more options available

EVO 29 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EVO Soft												
594-654081	EVO	Soft	SYM	750-26.5	FKF2	960	1 720	SC	45	45	480	13 250
594-654020	EVO	Soft	SYM	750-26.5	FKF, TRS, A343, A344	906	1 720	SC	53	53	453	12 680
594-673001	EVO	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	960	1 720	SC	45	45	480	13 510

EVO 30 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EVO Standard												
494-674000	EVO	Standard	SYM	700-26	BEL 194	775	1 500	SC	15	15	408	13 620
494-644021	EVO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1 500	SC	20	20	436	12 950
494-654080	EVO	Standard	SYM	750-26.5	FKF2	915	1 720	SC	28	28	466	15 110
494-654060	EVO	Standard	SYM	750-26.5	T428	915	1 720	SC	45	45	458	14 550
494-654060	EVO	Standard	SYM	750-30.5	T428	915	1 720	SC	45	45	458	14 550
494-673000	EVO	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	915	1 720	SC	23	23	471	15 110
EVO Soft												
494-644020	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1 500	SC	53	53	453	13 440
494-654000	EVO	Soft	SYM	750-26.5	FKF, TRS, A343, A344	906	1 720	SC	53	53	453	14 550
494-654081	EVO	Soft	SYM	750-26.5	FKF2	960	1 720	SC	45	45	480	15 480

EVO MAX LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EVO Narrow												
394-661021	EVO	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	800	1 430	SC	0	0	424	11 830
394-644021	EVO	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	775	1 500	SC	0	0	419	12 390
394-654083	EVO	Narrow	SYM	750-26.5	FKF2	850	1 720	SC	0	0	457	13 860
394-673001	EVO	Narrow	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	850	1 720	SC	0	0	454	14 670

EVO MAX LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EVO Standard												
394-640020	EVO	Standard	SYM	600-22.5	FKF2, TRS, TRS2, T428, A344, A644	775	1 300	SC	22	22	388	10 460
394-624040	EVO	Standard	SYM	600-26.5	FKF2, FR, T428, A343	740	1 500	SC	15	15	374	12 250
394-652021	EVO	Standard	SYM	710-22.5	TRS, TRS2, T428, A344	840	1 300	SC	10	10	429	11 050
394-644022	EVO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1 500	SC	20	20	420	12 500
394-644026	EVO	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	840	1 500	SC	10	10	429	12 880
394-680001	EVO	Standard	SYM	710-28.5	FKF2	840	1 720	SC	20	20	420	13 970
394-680025	EVO	Standard	SYM	710-28.5	TRS2, A644	840	1 720	SC	15	15	424	13 970
394-654001	EVO	Standard	SYM	750-26.5	FKF, TRS, A343, A344	840	1 720	SC	15	15	424	13 440
394-654080	EVO	Standard	SYM	750-26.5	FKF2	915	1 720	SC	23	23	458	14 300
394-654060	EVO	Standard	SYM	750-26.5	T428	870	1 720	SC	20	20	435	14 180
394-654060	EVO	Standard	SYM	750-30.5	T428	870	1 720	SC	20	20	435	14 180
394-663000	EVO	Standard	SYM	750-26.5	TRS2	915	1 720	SC	33	33	458	14 310
394-663000	EVO	Standard	SYM	780-26.5	FKF	915	1 720	SC	33	33	458	14 310
394-656000	EVO	Standard	SYM	800-26.5	FKF, FKF2, T440, T480, A644	915	1 500	SC	13	13	464	13 190
EVO Soft												
394-652020	EVO	Soft	SYM	710-22.5	FKF2, A643, A644	906	1 300	SC	53	53	453	11 100
394-661020	EVO	Soft	SYM	710-24.5	FKF, FKF2, A343, A644	906	1 430	SC	48	48	453	12 740
394-644000	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	960	1 500	SC	80	80	480	13 190
394-644020	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1 500	SC	53	53	453	12 990
394-644025	EVO	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	906	1 500	SC	43	43	453	12 990
394-680000	EVO	Soft	SYM	710-28.5	FKF2	906	1 720	SC	53	53	453	14 430


Only single cleat in price list, more options available

EVO MAX LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EVO Soft												
394-654040	EVO	Soft	SYM	710-30.5	T428	906	1 720	SC	57	57	453	14 430
394-654081	EVO	Soft	SYM	750-26.5	FKF2	960	1 720	SC	45	45	480	14 550
394-654000	EVO	Soft	SYM	750-26.5	FKF, TRS, A343, A344	906	1 720	SC	48	48	453	14 180
394-654020	EVO	Soft	SYM	750-26.5	FKF, TRS, A343, A344	960	1 720	SC	75	75	480	14 430
394-663001	EVO	Soft	SYM	750-26.5	TRS2	960	1 720	SC	55	55	480	14 550
394-663001	EVO	Soft	SYM	780-26.5	FKF	960	1 720	SC	55	55	480	14 550
394-673000	EVO	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	960	1 720	SC	45	45	480	14 810
394-656026	EVO	Soft	SYM	800-26.5	TRS2, A344	960	1 500	SC	20	20	480	13 680
394-656001	EVO	Soft	SYM	800-26.5	FKF, FKF2, T440, T480, A644	960	1 500	SC	35	35	480	13 500



ECO™

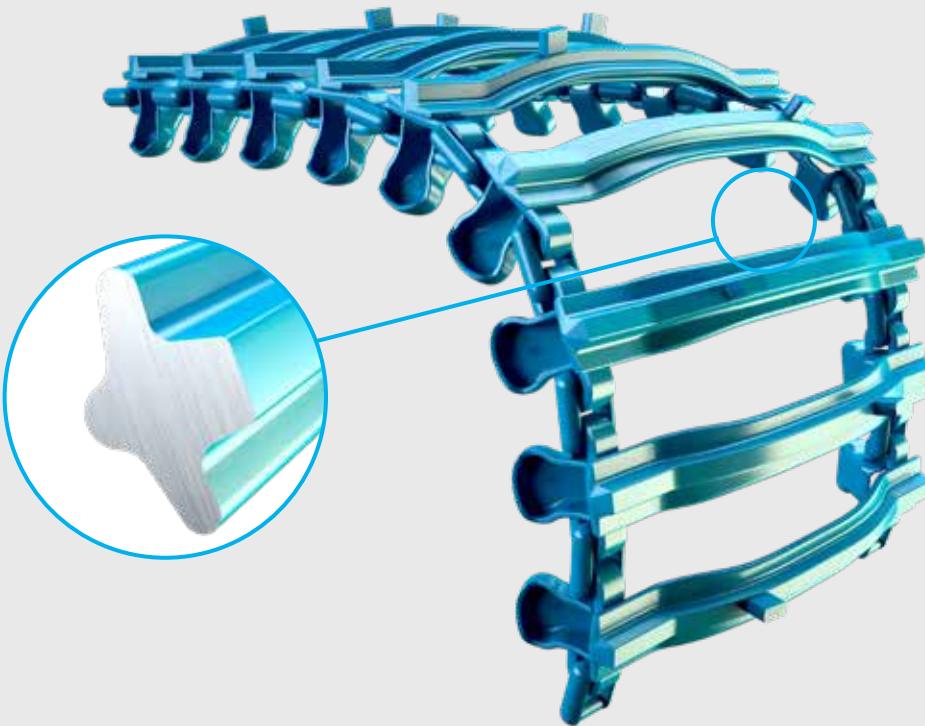

NARROW CROSS MEMBER



GRIP FLOTATION SNOW



STANDARD CROSS MEMBER



GRIP FLOTATION SNOW



SOFT CROSS MEMBER



GRIP FLOTATION SNOW



M-SOFT



GRIP FLOTATION SNOW

ECO 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
ECO Narrow												
097-640111	ECO	Narrow	SYM	600-22.5	ELS, T404, T423	670	1 300	SC	0	0	375	8 640
097-640115	ECO	Narrow	SYM	600-22.5	FKF2, TRS, TRS2, T428, A344, A644	670	1 300	SC	0	0	385	8 640
097-624422	ECO	Narrow	SYM	600-26.5	T422	710	1 500	SC	0	0	360	9 690
097-624020	ECO	Narrow	SYM	600-26.5	FKF	670	1 500	SC	0	0	375	9 060
097-624040	ECO	Narrow	SYM	600-26.5	FKF2, FR, T428, A343	670	1 500	SC	0	0	375	9 060
097-624045	ECO	Narrow	SYM	600-26.5	TRS, TRS2, T440, T480, A344, A644	670	1 500	SC	0	0	385	9 120
097-660020	ECO	Narrow	SYM	650-22.5	T422	745	1 300	SC	0	0	385	9 080
097-652745	ECO	Narrow	SYM	710-22.5	TRS, TRS2, T428, A344	778	1 300	SC	0	0	435	8 750
097-652040	ECO	Narrow	SYM	710-22.5	FKF, A331, A343	765	1 300	SC	0	0	420	8 750
097-652020	ECO	Narrow	SYM	710-22.5	FKF2, A643, A644	765	1 300	SC	0	0	430	8 750
097-652045	ECO	Narrow	SYM	710-22.5	TRS, TRS2, T428, A344	778	1 300	SC	0	0	435	8 850
097-661020	ECO	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	765	1 430	SC	0	0	425	9 070
097-661025	ECO	Narrow	SYM	710-24.5	TRS2, T428, T440, T480, A344	778	1 430	SC	0	0	430	9 310
097-644020	ECO	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	765	1 500	SC	0	0	425	9 440
097-644025	ECO	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	778	1 500	SC	0	0	435	9 770
097-644422	ECO	Narrow	SYM	710-26.5	T422	795	1 500	SC	0	0	445	9 770
097-654000	ECO	Narrow	SYM	750-26.5	FKF, TRS, A343, A344	765	1 720	SC	0	0	425	10 650
ECO Standard												
097-670025	ECO	Standard	SYM	600-24.5	TRS2	745	1 430	SC	13	13	373	9 300
097-670000	ECO	Standard	SYM	600-24.5	FR	710	1 430	SC	10	10	375	8 880
097-653041	ECO	Standard	SYM	650-26.5	ELS, TRS, A343, A344	745	1 720	SC	23	23	380	10 400
097-656020	ECO	Standard	SYM	800-26.5	FKF, FKF2, T440, T480, A644	944	1 500	SC	27	27	475	11 540
ECO Soft												
027-652045	ECO	Soft	SYM	710-22.5	TRS, TRS2, T428, A344	916	1 300	SC	58	58	458	9 870
027-652040	ECO	Soft	SYM	710-22.5	FKF, A331, A343	905	1 300	SC	63	63	453	9 870
027-652020	ECO	Soft	SYM	710-22.5	FKF2, A643, A644	905	1 300	SC	58	58	453	9 870
027-661020	ECO	Soft	SYM	710-24.5	FKF, FKF2, A343, A644	916	1 430	SC	68	68	458	10 790
027-644020	ECO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	905	1 500	SC	63	63	453	11 260

Only single cleat in price list, more options available

ECO 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
ECO Narrow												
297-624045	ECO	Narrow	SYM	600-26.5	TRS, TRS2, T440, T480, A344, A644	670	1 500	SC	0	0	385	9 850
297-624040	ECO	Narrow	SYM	600-26.5	FKF2, FR, T428, A343	680	1 500	SC	0	0	380	9 850
297-654001	ECO	Narrow	SYM	700-30.5	A331	765	1 720	SC	0	0	425	12 880
297-652040	ECO	Narrow	SYM	710-22.5	FKF, A331, A343	765	1 300	SC	0	0	425	9 640
297-644422	ECO	Narrow	SYM	710-26.5	T422	795	1 500	SC	0	0	445	10 750
297-644025	ECO	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	790	1 500	SC	0	0	440	10 480
297-654040	ECO	Narrow	SYM	710-30.5	T428	745	1 720	SC	0	0	420	11 320
297-654060	ECO	Narrow	SYM	750-26.5	T428	778	1 720	SC	0	0	435	11 320
297-654060	ECO	Narrow	SYM	750-30.5	T428	778	1 720	SC	0	0	435	11 320
297-663001	ECO	Narrow	SYM	750-26.5	TRS2	810	1 720	SC	0	0	455	11 510
297-663001	ECO	Narrow	SYM	780-26.5	FKF	810	1 720	SC	0	0	455	11 510
ECO Standard												
297-624020	ECO	Standard	SYM	600-26.5	FKF	710	1 500	SC	15	15	370	9 880
297-653040	ECO	Standard	SYM	650-26.5	ELS, TRS, A343, A344	760	1 720	SC	30	30	380	11 030
297-652045	ECO	Standard	SYM	710-22.5	TRS, TRS2, T428, A344	850	1 300	SC	15	15	440	9 890
297-661020	ECO	Standard	SYM	710-24.5	FKF, FKF2, A343, A644	850	1 430	SC	25	25	430	10 070
297-661025	ECO	Standard	SYM	710-24.5	TRS2, T428, T440, T480	850	1 430	SC	20	20	430	10 060
297-644040	ECO	Standard	SYM	710-26.5	Firestone, BKT	765	1 500	SC	8	8	405	10 880
297-644020	ECO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1 500	SC	25	25	430	10 320
297-644041	ECO	Standard	SYM	710-26.5	Firestone, BKT	850	1 500	SC	30	30	425	10 880
297-680000	ECO	Standard	SYM	710-28.5	FKF2	850	1 720	SC	30	30	425	12 380
297-654041	ECO	Standard	SYM	710-30.5	T428	690	1 720	SC	15	15	420	11 970
297-654000	ECO	Standard	SYM	750-26.5	FKF, TRS, A343, A344	850	1 720	SC	30	30	425	11 320
297-654070	ECO	Standard	SYM	750-26.5	A643, T480	850	1 720	SC	10	10	445	11 810
297-654080	ECO	Standard	SYM	750-26.5	FKF2	944	1 720	SC	37	37	472	11 760
297-663000	ECO	Standard	SYM	750-26.5	TRS2	880	1 720	SC	15	15	455	11 510
297-663000	ECO	Standard	SYM	780-26.5	FKF	880	1 720	SC	15	15	455	11 510
297-673000	ECO	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	880	1 720	SC	10	10	460	12 500
297-656030	ECO	Standard	SYM	800-26.5	TRS2, A344	944	1 500	SC	17	17	485	12 130

ECO 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
ECO Standard												
297-656020	ECO	Standard	SYM	800-26.5	FKF, FKF2, T440, T480, A644	944	1 500	SC	27	27	475	11 600
297-677000	ECO	Standard	SYM	870-26.5	A344	944	1 500	SC	5	5	498	12 250
ECO Soft												
227-652040	ECO	Soft	SYM	710-22.5	FKF, A331, A343	905	1 300	SC	68	68	453	10 450
227-661020	ECO	Soft	SYM	710-24.5	FKF, FKF2, A343, A644	905	1 430	SC	63	63	453	10 940
227-661025	ECO	Soft	SYM	710-24.5	TRS2, T428, T440, T480, A344	905	1 430	SC	48	48	453	10 940
227-644025	ECO	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	905	1 500	SC	48	48	453	11 870
227-644020	ECO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	905	1 500	SC	58	58	453	11 820
227-654020	ECO	Soft	SYM	750-26.5	FKF, TRS, A343, A344	905	1 720	SC	58	58	453	12 150

ECO 29 MM LINK SYSTEM


Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
ECO Standard												
597-644020	ECO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1 500	SC	25	25	430	11 560
597-654080	ECO	Standard	SYM	750-26.5	FKF2	944	1 720	SC	37	37	472	12 680
597-654000	ECO	Standard	SYM	750-26.5	FKF, TRS, A343, A344	850	1 720	SC	25	25	430	12 680
597-673000	ECO	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	880	1 720	SC	10	10	460	14 000
ECO Soft												
597-644021	ECO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	905	1 500	SC	53	53	453	12 820
597-654020	ECO	Soft	SYM	750-26.5	FKF, TRS, A343, A344	905	1 720	SC	53	53	453	12 680

ECO 30 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
ECO Standard												
497-644020	ECO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1 500	SC	25	25	436	13 860
497-654000	ECO	Standard	SYM	750-26.5	FKF, TRS, A343, A344	850	1 720	SC	25	25	436	14 180
497-663000	ECO	Standard	SYM	750-26.5	TRS2	880	1 720	SC	15	15	461	14 180
497-663000	ECO	Standard	SYM	780-26.5	FKF	880	1 720	SC	15	15	461	14 180
497-673000	ECO	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	944	1 720	SC	37	37	472	15 620

Only single cleat in price list, more options available

KOVAX™

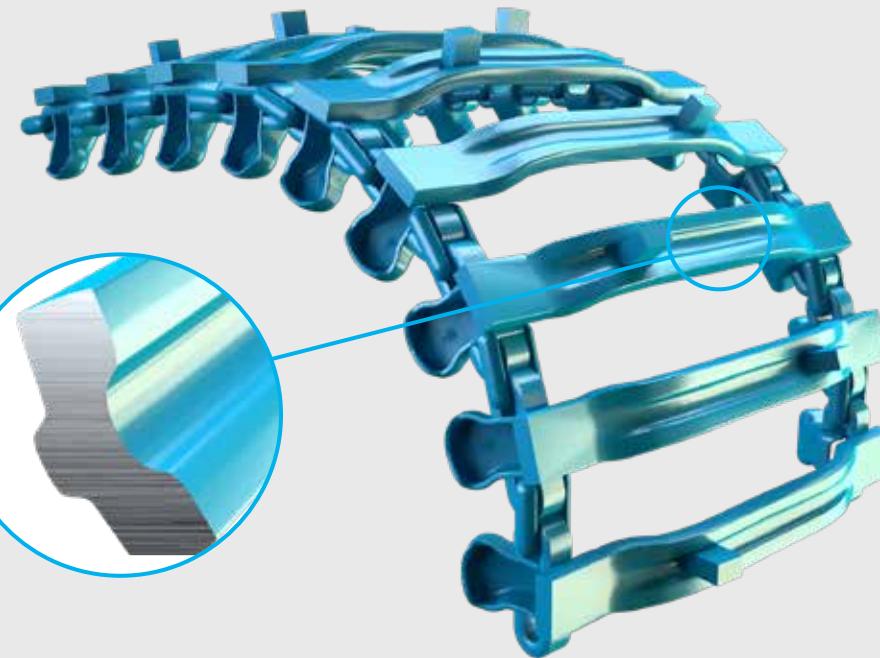

NARROW CROSS MEMBER



GRIP FLOTATION SNOW



STANDARD CROSS MEMBER



GRIP FLOTATION SNOW



SOFT CROSS MEMBER



GRIP FLOTATION SNOW



M (STD)



GRIP FLOTATION SNOW



M-NARROW



GRIP FLOTATION SNOW



M-SOFT



GRIP FLOTATION SNOW

KOVAX 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
KovaX Narrow												
188-670026	KovaX	Narrow	SYM	600-24.5	TRS2	680	1 430	SC	0	0	360	7 910
188-652040	KovaX	Narrow	SYM	710-22.5	FKF, A331, A343	770	1 300	SC	0	0	425	8 100
188-652020	KovaX	Narrow	SYM	710-22.5	FKF2, A643, A644	770	1 300	SC	0	0	430	8 100
188-652045	KovaX	Narrow	SYM	710-22.5	TRS, TRS2, T428, A344	770	1 300	SC	0	0	435	8 100
188-661022	KovaX	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	770	1 430	SC	0	0	425	8 590
188-661026	KovaX	Narrow	SYM	710-24.5	TRS2, T428, T440, T480, A344	795	1 430	SC	0	0	440	8 610
KovaX Standard												
188-640111	KovaX	Standard	SYM	600-22.5	ELS, T404, T423	740	1 300	SC	20	20	380	8 160
188-670025	KovaX	Standard	SYM	600-24.5	TRS2	740	1 430	SC	10	10	370	8 300
188-624020	KovaX	Standard	SYM	600-26.5	FKF	740	1 500	SC	30	30	370	8 930
188-662020	KovaX	Standard	SYM	650-24.5	FR, A342, A344	770	1 430	SC	15	15	400	8 280
188-644021	KovaX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1 500	SC	25	25	430	9 770
KovaX Soft												
188-652042	KovaX	Soft	SYM	710-22.5	FKF, A331, A343	903	1 300	SC	57	57	452	8 890
188-652021	KovaX	Soft	OSS	710-22.5	FKF2, A643, A644	836	1 300	SC	0	50	430	8 410
188-652041	KovaX	Soft	OSS	710-22.5	FKF, A331, A343	836	1 300	SC	0	57	425	8 450
188-652046	KovaX	Soft	OSS	710-22.5	TRS, TRS2, T428, A344	875	1 300	SC	0	75	435	8 730
188-644025	KovaX	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	903	1 500	SC	42	42	452	9 330
188-644020	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	903	1 500	SC	52	52	452	9 330

KOVAX 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
KovaX Narrow												
288-652045	KovaX	Narrow	SYM	710-22.5	TRS, TRS2, T428, A344	770	1 300	SC	0	0	435	7 900
288-652040	KovaX	Narrow	SYM	710-22.5	FKF, A331, A343	770	1 300	SC	0	0	425	7 900
288-661026	KovaX	Narrow	SYM	710-24.5	TRS2, T428, T440, T480, A344	795	1 430	SC	0	0	440	8 700
288-661022	KovaX	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	770	1 430	SC	0	0	430	8 700
288-644022	KovaX	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	770	1 500	SC	0	0	430	8 620
288-644026	KovaX	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	795	1 500	SC	0	0	440	8 620
288-680025	KovaX	Narrow	SYM	710-28.5	TRS2, A644	770	1 720	SC	0	0	435	10 480

Only single cleat in price list, more options available

KOVAX 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
KovaX Narrow												
288-654081	KovaX	Narrow	SYM	750-26.5	FKF2	850	1 720	SC	0	0	465	10 740
288-673000	KovaX	Narrow	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	850	1 720	SC	0	0	465	11 510
288-656025	KovaX	Narrow	SYM	800-26.5	TRS2, A344	900	1 500	SC	0	0	490	10 500
288-656020	KovaX	Narrow	SYM	800-26.5	FKF, FKF2, T440, T480, A644	850	1 500	SC	0	0	475	10 020
KovaX Standard												
288-640115	KovaX	Standard	SYM	600-22.5	FKF2, TRS, TRS2, T428, A344, A644	740	1 300	SC	10	10	445	7 920
288-624045	KovaX	Standard	SYM	600-26.5	TRS, TRS2, T440, T480, A344, A644	740	1 500	SC	10	10	390	8 900
288-624040	KovaX	Standard	SYM	600-26.5	FKF2, FR, T428, A343	740	1 500	SC	20	20	380	8 900
288-652023	KovaX	Standard	SYM	710-22.5	FKF2, A643, A644	850	1 300	SC	25	25	430	8 210
288-644423	KovaX	Standard	SYM	710-26.5	T422	850	1 500	SC	15	15	425	9 770
288-644024	KovaX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1 500	SC	25	25	430	9 810
288-644027	KovaX	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	795	1 500	SC	15	15	440	9 610
288-654040	KovaX	Standard	SYM	710-30.5	T428	795	1 720	SC	8	8	420	10 320
288-654070	KovaX	Standard	SYM	750-26.5	A643, T480	870	1 720	SC	20	20	445	11 270
288-654080	KovaX	Standard	SYM	750-26.5	FKF2	903	1 720	SC	20	20	465	11 370
288-654021	KovaX	Standard	SYM	750-26.5	FKF, TRS, A343, A344	850	1 720	SC	25	25	430	10 740
288-663000	KovaX	Standard	SYM	750-26.5	TRS2	870	1 720	SC	10	10	455	11 480
288-663000	KovaX	Standard	SYM	780-26.5	FKF	870	1 720	SC	10	10	455	11 480
KovaX Soft												
288-654000	KovaX	Soft	OSS	700-30.5	A331	836	1 720	SC	0	56	425	11 110
288-652022	KovaX	Soft	SYM	710-22.5	FKF2, A643, A644	903	1 300	SC	52	52	452	8 550
288-652042	KovaX	Soft	SYM	710-22.5	FKF, A331, A343	903	1 300	SC	57	57	452	8 550
288-661023	KovaX	Soft	SYM	710-24.5	FKF, FKF2, A343, A644	950	1 430	SC	75	75	475	9 400
288-661027	KovaX	Soft	OSS	710-24.5	TRS2, T428, T440, T480, A344	875	1 430	SC	0	65	445	9 320
288-661025	KovaX	Soft	SYM	710-24.5	TRS2, T428, T440, T480, A344	903	1 430	SC	42	42	452	9 080
288-661020	KovaX	Soft	SYM	710-24.5	FKF, FKF2, A343, A644	903	1 430	SC	52	52	452	9 080
288-661021	KovaX	Soft	OSS	710-24.5	FKF, FKF2, A343, A644	836	1 430	SC	0	52	430	8 700
288-644025	KovaX	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	903	1 500	SC	41	41	452	9 770
288-644020	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	903	1 500	SC	51	51	452	9 450

KOVAX 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
KovaX Soft												
288-644021	KovaX	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	836	1 500	SC	0	52	430	9 450
288-644422	KovaX	Soft	SYM	710-26.5	T422	950	1 500	SC	68	68	475	10 780
288-644023	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	950	1 500	SC	75	75	475	10 780
288-680020	KovaX	Soft	SYM	710-28.5	FKF2	903	1 720	SC	57	57	452	12 000
288-680026	KovaX	Soft	SYM	710-28.5	TRS2, A644	950	1 720	SC	70	70	475	12 250
288-654041	KovaX	Soft	SYM	710-30.5	T428	905	1 720	SC	62	62	453	11 180
288-654020	KovaX	Soft	SYM	750-26.5	FKF, TRS, A343, A344	903	1 720	SC	52	52	452	11 340
288-654060	KovaX	Soft	SYM	750-26.5	T428	903	1 720	SC	42	42	452	11 340
288-654060	KovaX	Soft	SYM	750-30.5	T428	903	1 720	SC	42	42	452	11 340
288-656021	KovaX	Soft	SYM	800-26.5	FKF, FKF2, T440, T480, A644	950	1 500	SC	30	30	475	10 730

KOVAX 29 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
KovaX Soft												
588-644020	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	905	1 500	SC	52	52	453	11 070

KOVAX 30 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
KovaX Narrow												
488-644022	KovaX	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	770	1 500	SC	0	0	436	10 460
KovaX Standard												
488-644020	KovaX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1 500	SC	25	25	436	11 240
KovaX Soft												
488-644021	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	905	1 500	SC	52	52	453	11 660
488-654080	KovaX	Soft	SYM	750-26.5	FKF2	950	1 720	SC	40	40	475	12 380
488-654000	KovaX	Soft	SYM	750-26.5	FKF, TRS, A343, A344	903	1 720	SC	52	52	452	12 210

Only single cleat in price list, more options available

KOVAX MAX LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
KovaX Narrow												
388-661021	KovaX	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	770	1 430	SC	0	0	424	10 860
388-644022	KovaX	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	770	1 500	SC	0	0	419	12 250
388-673001	KovaX	Narrow	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	850	1 720	SC	0	0	459	13 620
388-656025	KovaX	Narrow	SYM	800-26.5	TRS2, A344	900	1 500	SC	0	0	482	12 600
388-656021	KovaX	Narrow	SYM	800-26.5	FKF, FKF2, T440, T480, A644	850	1 500	SC	0	0	464	12 390
KovaX Standard												
388-644030	KovaX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1 500	SC	25	25	425	12 660
388-680020	KovaX	Standard	SYM	710-28.5	FKF2	850	1 720	SC	18	18	426	14 460
388-654081	KovaX	Standard	SYM	750-26.5	FKF2	900	1 720	SC	15	15	514	14 070
388-663001	KovaX	Standard	SYM	750-26.5	TRS2	870	1 720	SC	10	10	444	14 390
388-663001	KovaX	Standard	SYM	780-26.5	FKF	870	1 720	SC	10	10	444	14 390
KovaX Soft												
388-652040	KovaX	Soft	SYM	710-22.5	FKF, A331, A343	905	1 300	SC	77	77	453	11 250
388-661020	KovaX	Soft	SYM	710-24.5	FKF, FKF2, A343, A644	905	1 430	SC	50	50	453	12 410
388-644023	KovaX	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	836	1 500	SC	0	52	426	13 140
388-644024	KovaX	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	905	1 500	SC	30	75	430	13 380
388-644020	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	903	1 500	SC	52	52	452	13 190
388-644021	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	950	1 500	SC	75	75	475	13 560
388-654080	KovaX	Soft	SYM	750-26.5	FKF2	950	1 720	SC	40	40	475	14 550
388-654021	KovaX	Soft	SYM	750-26.5	FKF, TRS, A343, A344	950	1 720	SC	70	70	475	15 080
388-654071	KovaX	Soft	SYM	750-26.5	A643, T480	950	1 720	SC	55	55	475	16 360
388-654070	KovaX	Soft	OSS	750-26.5	T480 Only	905	1 720	SC	10	55	442	15 830
388-654020	KovaX	Soft	SYM	750-26.5	FKF, TRS, A343, A344	903	1 720	SC	52	52	452	14 180
388-654060	KovaX	Soft	SYM	750-26.5	T428	903	1 720	SC	37	37	452	14 060
388-654060	KovaX	Soft	SYM	750-30.5	T428	903	1 720	SC	37	37	452	14 060
388-663000	KovaX	Soft	SYM	750-26.5	TRS2	950	1 720	SC	50	50	475	15 120
388-663000	KovaX	Soft	SYM	780-26.5	FKF	950	1 720	SC	50	50	475	15 120
388-663002	KovaX	Soft	OSS	750-26.5	TRS2	905	1 720	SC	10	45	442	13 650
388-663002	KovaX	Soft	OSS	780-26.5	FKF	905	1 720	SC	10	45	442	13 650


KOVAX MAX LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
KovaX Soft												
388-673000	KovaX	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	950	1 720	SC	40	40	475	14 550
388-656022	KovaX	Soft	OSS	800-26.5	FKF, FKF2, T440, T480, A644	905	1 500	SC	0	25	472	13 560
388-656020	KovaX	Soft	SYM	800-26.5	FKF, FKF2, T440, T480, A644	950	1 500	SC	25	25	475	14 140



Combination

OF-BALTIC™

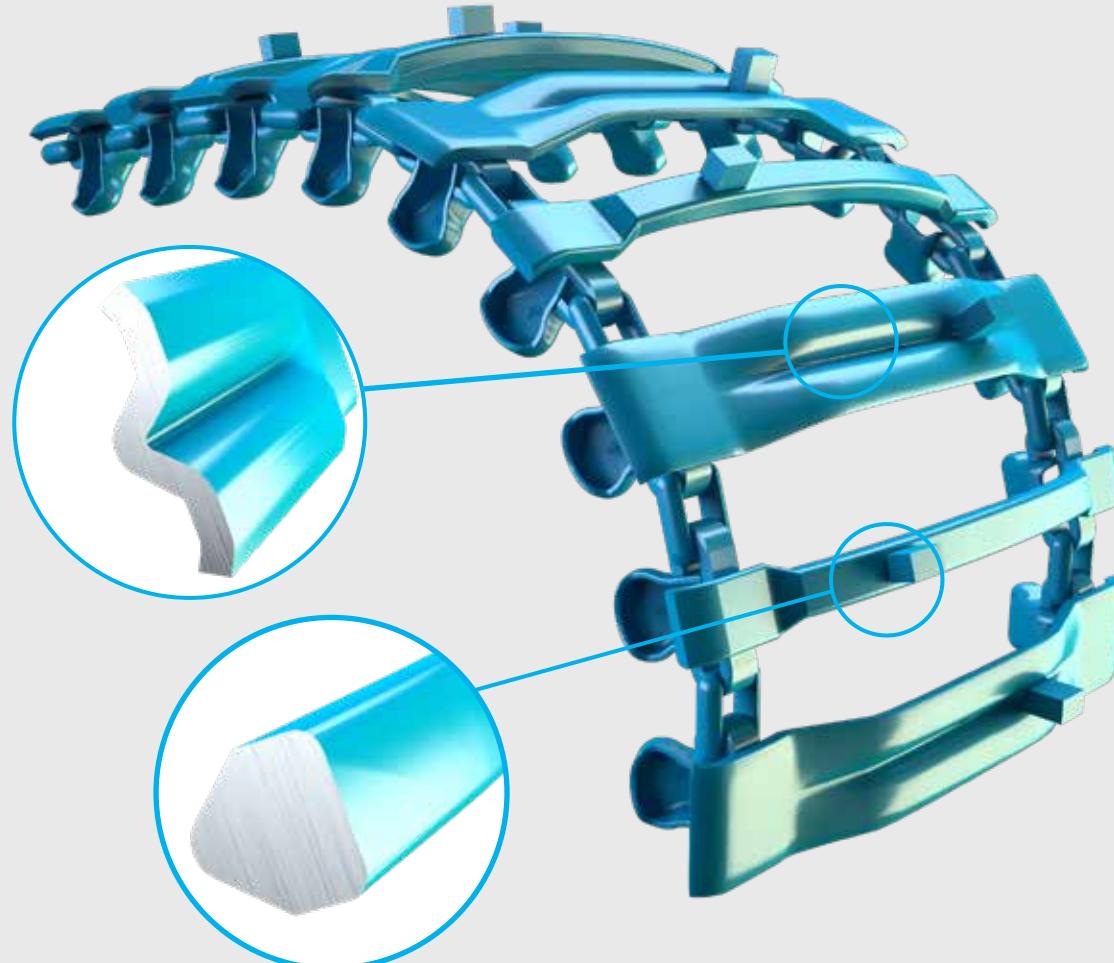

OF-SOFT CROSS MEMBER



OF-STANDARD CROSS MEMBER



BALTIC-SOFT CROSS MEMBER BALTIC-STANDARD CROSS MEMBER



GRIP



FLOTATION



SNOW



GRIP



FLOTATION



SNOW

COMBINATION OF-BALTIC 22 MM LINK SYSTEM


Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
OF-Baltic Standard												
162-624045	OF-Baltic	Standard	SYM	600-26.5	TRS, TRS2, T440, T480, A344, A644	730/725	1 500	SC	10	10	385	8 730

COMBINATION OF-BALTIC 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
OF-Baltic Standard												
261-652040	OF-Baltic	Standard	SYM	710-22.5	FKF, A331, A343	820/815	1 300	SC	15	15	425	8 520
261-652045	OF-Baltic	Standard	SYM	710-22.5	TRS, TRS2, T428, A344	850/770	1 300	SC	20	20	435	7 970

Combination

ECO-BALTIC™

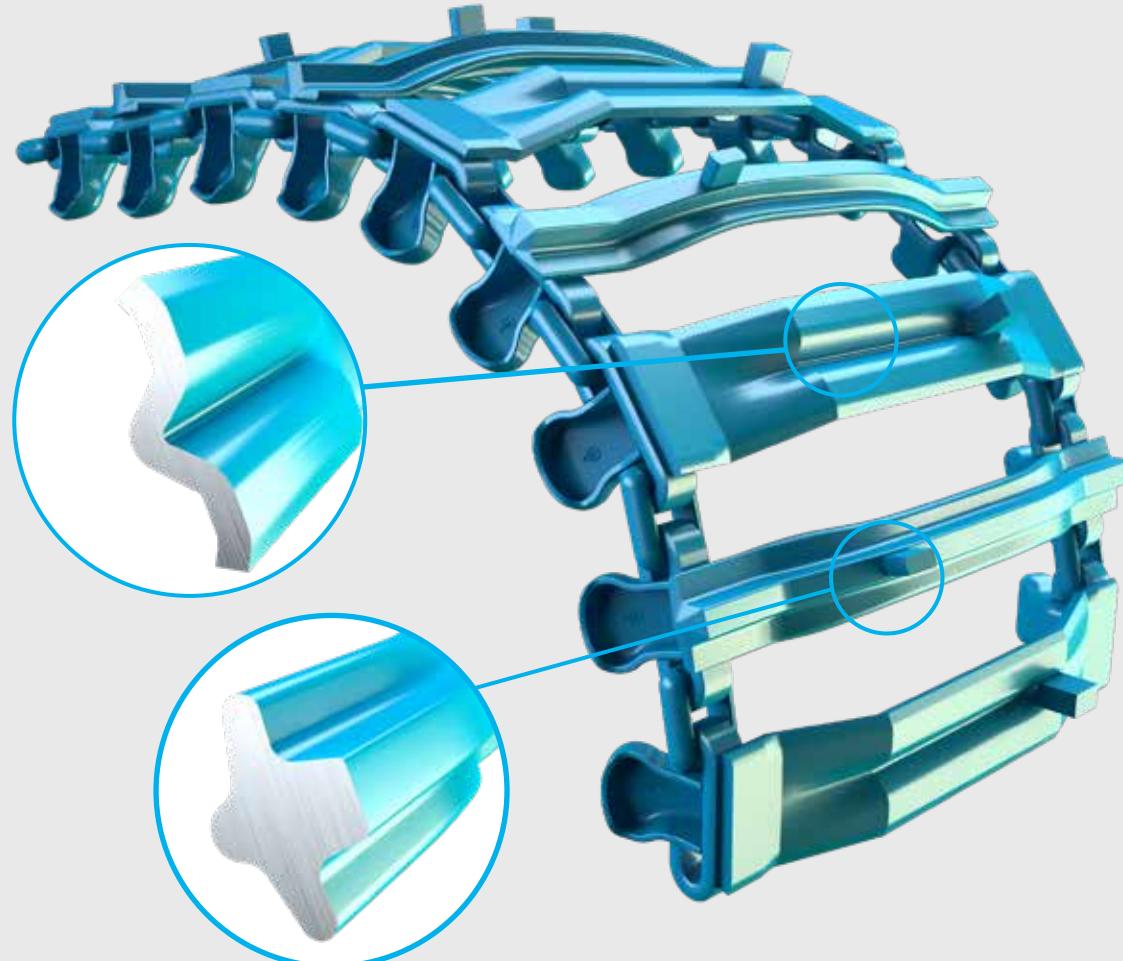

ECO-NARROW CROSS MEMBER

ECO-STANDARD CROSS MEMBER

BALTIC-NARROW CROSS MEMBER BALTIC-STANDARD CROSS MEMBER



GRIP



FLOTATION



SNOW



GRIP



FLOTATION



SNOW

COMBINATION ECO-BALTIC 22 MM LINK SYSTEM


Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
ECO-BALTIC Narrow												
079-644025	ECO-Baltic	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	778/770	1 500	SC	0	0	435	9 650

COMBINATION ECO-BALTIC 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
ECO-BALTIC Narrow												
279-652040	ECO-Baltic	Narrow	SYM	710-22.5	FKF, A331, A343	765/750	1 300	SC	0	0	425	9 400
279-652045	ECO-Baltic	Narrow	SYM	710-22.5	TRS, TRS2, T428, A344	770/778	1 300	SC	0	0	435	9 400
279-661020	ECO-Baltic	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	765/750	1 430	SC	0	0	430	9 930
279-644020	ECO-Baltic	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	750/765	1 500	SC	0	0	430	10 570
279-644025	ECO-Baltic	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	770/790	1 500	SC	0	0	440	10 570
279-656026	ECO-Baltic	Narrow	SYM	800-26.5	TRS2, A344	870/880	1 500	SC	0	0	485	11 320
ECO-BALTIC Standard												
279-654080	ECO-Baltic	Standard	SYM	750-26.5	FKF2	944/935	1 720	SC	37	37	472	14 180
279-663000	ECO-Baltic	Standard	SYM	750-26.5	TRS2	935/880	1 720	SC	43	43	468	12 310
279-663000	ECO-Baltic	Standard	SYM	780-26.5	FKF	935/880	1 720	SC	43	43	468	12 310
279-656020	ECO-Baltic	Standard	SYM	800-26.5	FKF, FKF2, T440, T480, A644	935/944	1 500	SC	27	27	475	11 820
279-656025	ECO-Baltic	Standard	SYM	800-26.5	TRS2, A344	935/944	1 500	SC	17	17	485	11 820

Combination

EVO-BALTIC™

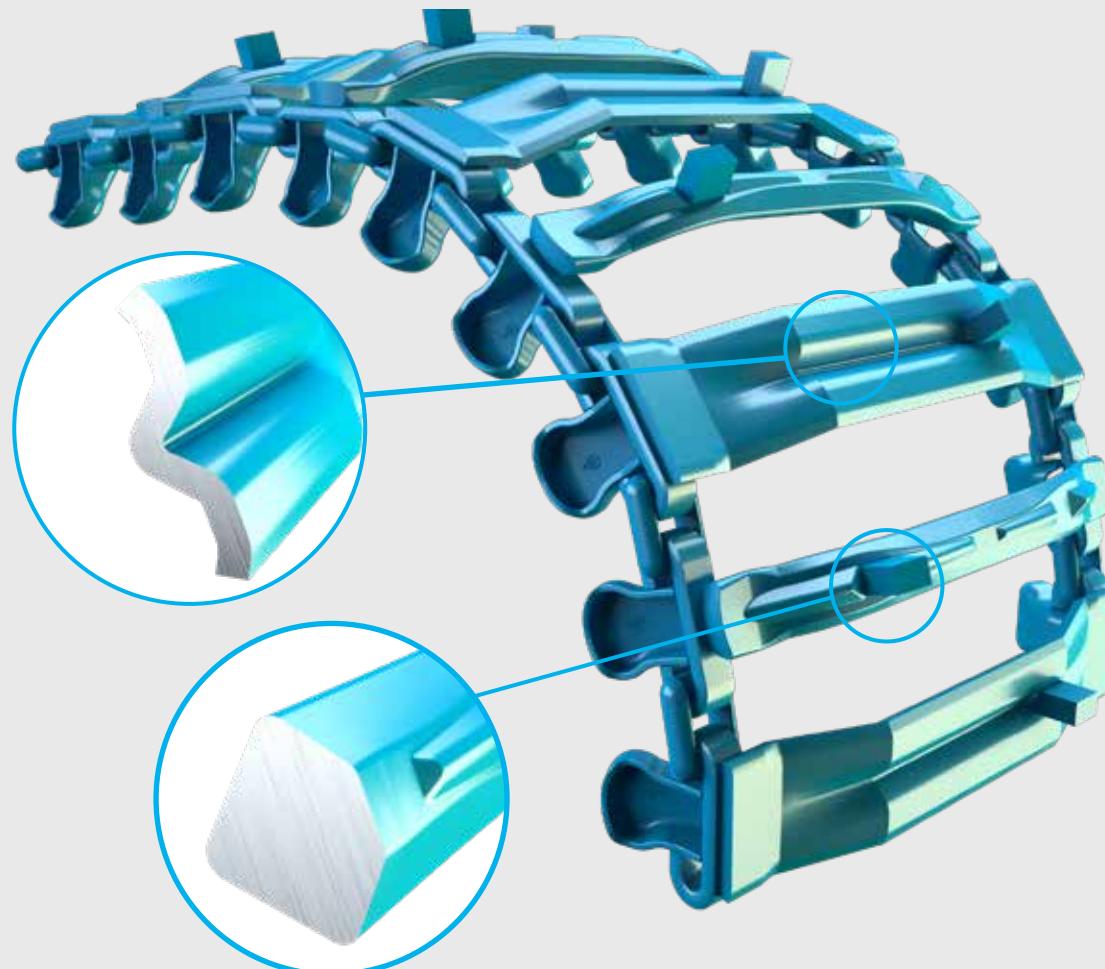


EVO-SOFT CROSS MEMBER




EVO-STANDARD CROSS MEMBER



BALTIC-SOFT CROSS MEMBER BALTIC-STANDARD CROSS MEMBER



GRIP FLOTATION SNOW



GRIP FLOTATION SNOW

COMBINATION EVO-BALTIC 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EVO-Baltic Narrow												
049-652040	EVO-Baltic	Narrow	SYM	710-22.5	FKF, A331, A343	775/770	1 300	SC	0	0	425	8 990
049-661020	EVO-Baltic	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	775/770	1 430	SC	0	0	430	9 600
049-661025	EVO-Baltic	Narrow	SYM	710-24.5	TRS2, T428, T440, T480, A344	775/770	1 430	SC	0	0	435	9 600
EVO-Baltic Standard												
079-640115	EVO-Baltic	Standard	SYM	600-22.5	FKF2, TRS, TRS2, T428, A344, A644	670/730	1 300	SC	10	10	385	8 960
049-624422	EVO-Baltic	Standard	SYM	600-26.5	T422	775/770	1 500	SC	20	20	388	9 330
049-644423	EVO-Baltic	Standard	SYM	710-26.5	T422	850/860	1 500	SC	18	18	430	11 920

COMBINATION EVO-BALTIC 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EVO-Baltic Narrow												
249-661020	EVO-Baltic	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	775/770	1 430	SC	0	0	430	9 450
EVO-Baltic Standard												
249-644026	EVO-Baltic	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	840/840	1 500	SC	10	10	440	12 190
249-644020	EVO-Baltic	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840/840	1 500	SC	20	20	430	10 570
249-644422	EVO-Baltic	Standard	SYM	710-26.5	T422	862/850	1 500	SC	21	21	435	11 080
249-644025	EVO-Baltic	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	860/870	1 500	SC	25	25	440	10 570
249-654080	EVO-Baltic	Standard	SYM	750-26.5	FKF2	915/935	1 720	SC	30	30	468	13 610
249-654000	EVO-Baltic	Standard	SYM	750-26.5	FKF, TRS, A343, A344	870/860	1 720	SC	35	35	435	12 440
249-654060	EVO-Baltic	Standard	SYM	750-26.5	T428	870/860	1 720	SC	75	75	440	12 440
249-654060	EVO-Baltic	Standard	SYM	750-30.5	T428	870/860	1 720	SC	75	75	440	12 440
249-663000	EVO-Baltic	Standard	SYM	750-26.5	TRS2	915/935	1 720	SC	43	43	468	13 170
249-663000	EVO-Baltic	Standard	SYM	780-26.5	FKF	915/935	1 720	SC	43	43	468	13 170
249-673020	EVO-Baltic	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	915/935	1 720	SC	38	38	468	13 500
249-656024	EVO-Baltic	Standard	SYM	800-26.5	FKF, FKF2, T440, T480, A644	960/935	1 500	SC	35	35	480	11 340
249-656020	EVO-Baltic	Standard	SYM	800-26.5	FKF, FKF2, T440, T480, A644	960/935	1 500	SC	35	35	480	11 570
249-656030	EVO-Baltic	Standard	SYM	800-26.5	TRS2, A344	935/960	1 500	SC	20	20	490	11 570
249-656621	EVO-Baltic	Standard	SYM	800-26.5	FKF, FKF2, T440, T480, A644	915/935	1 500	SC	18	18	480	12 740
EVO-Baltic Soft												
249-655025	EVO-Baltic	Soft	SYM	800-24.5	TRS2	960/935	1 430	SC	25	25	485	11 470

Only single cleat in price list, more options available

COMBINATION EVO-BALTIC 29 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EVO-Baltic Narrow												
549-644020	EVO-Baltic	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	775/760	1 500	SC	0	0	435	12 200

COMBINATION EVO-U 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EVO-U Standard												
046-644422	EVO-U	Standard	SYM	710-26.5	T422	870/840	1 500	SC	20	20	435	9 950

COMBINATION EVO-U 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EVO-U Standard												
246-644026	EVO-U	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	850/870	1 500	SC	15	15	440	10 510

COMBINATION KOVAX-BALTIC 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
KovaX-Baltic Standard												
289-644020	KovaX-Baltic	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	875/890	1 500	SC	0	105	430	10 870


COMBINATION U-BALTIC 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
U-Baltic Narrow												
168-652045	U-Baltic	Narrow	SYM	710-22.5	TRS, TRS2, T428, A344	770/770	1 300	SC	0	0	435	8 100
168-661025	U-Baltic	Narrow	SYM	710-24.5	TRS2, T428, T440, T480, A344	770/770	1 430	SC	0	0	435	8 560
U-Baltic Soft												
168-661026	U-Baltic	Soft	SYM	710-24.5	TRS2, T428, T440, T480, A344	873/913	1 430	SC	51	51	456	9 070



Only single cleat in price list, more options available

U™

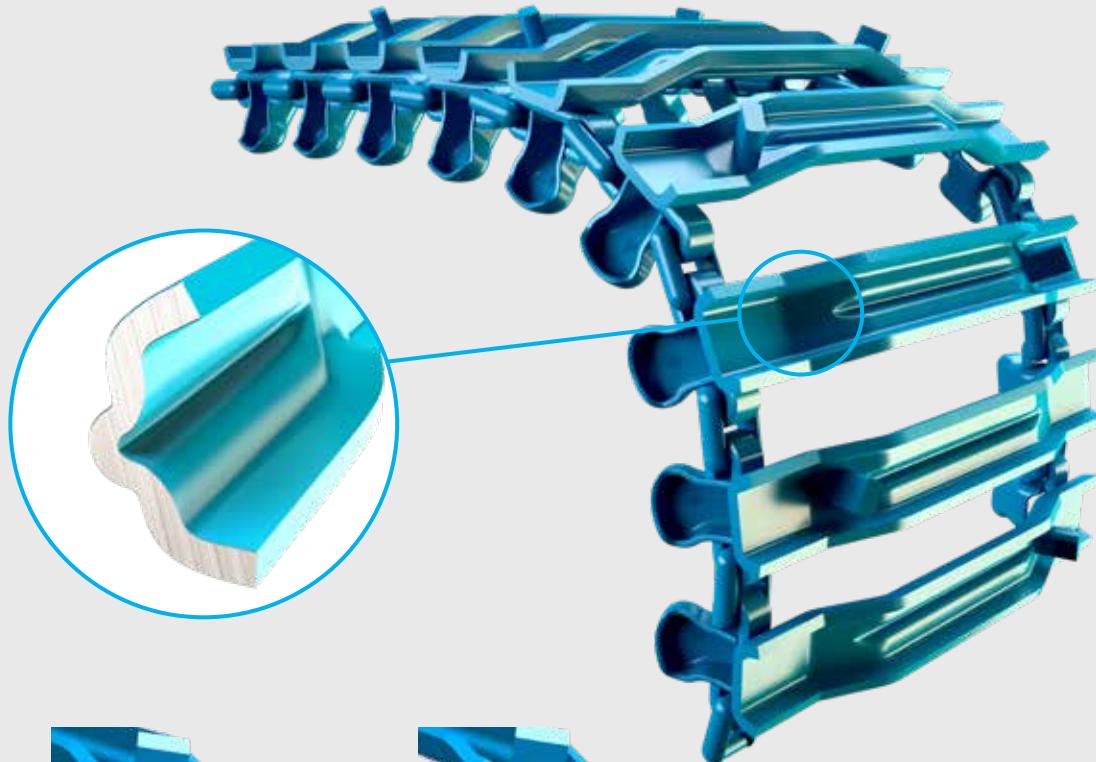

NARROW CROSS MEMBER



STANDARD CROSS MEMBER



SOFT CROSS MEMBER



GRIP



FLOTATION



SNOW



GRIP



FLOTATION



SNOW



GRIP



FLOTATION



SNOW

U 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
U Narrow												
096-640025	U	Narrow	SYM	600-22.5	A331	655	1 300	SC	0	0	365	7 330
096-640111	U	Narrow	SYM	600-22.5	ELS, T404, T423	675	1 300	SC	0	0	375	7 700
096-640115	U	Narrow	SYM	600-22.5	FKF2, TRS, TRS2, T428, A344, A644	675	1 300	SC	0	0	385	7 700
096-624040	U	Narrow	SYM	600-26.5	FKF2, FR, T428, A343	675	1 500	SC	0	0	375	8 560
096-624045	U	Narrow	SYM	600-26.5	TRS, TRS2, T440, T480, A344, A644	675	1 500	SC	0	0	385	8 560
096-652040	U	Narrow	SYM	710-22.5	FKF, A331, A343	770	1 300	SC	0	0	420	7 830
096-652045	U	Narrow	SYM	710-22.5	TRS, TRS2, T428, A344	770	1 300	SC	0	0	430	7 830
096-652020	U	Narrow	SYM	710-22.5	FKF2, A643, A644	770	1 300	SC	0	0	430	7 830
096-644020	U	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	770	1 500	SC	0	0	425	9 980
U Standard												
096-661020	U	Standard	SYM	710-24.5	FKF, FKF2, A343, A644	820	1 430	SC	15	15	425	10 290
096-644422	U	Standard	SYM	710-26.5	T422	850	1 500	SC	10	10	425	10 380
096-644025	U	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	850	1 500	SC	20	20	435	10 380

U 26 MM LINK SYSTEM


Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
OF Standard												
296-661020	U	Standard	SYM	710-24.5	FKF, FKF2, A343, A644	820	1 430	SC	15	15	425	10 060
296-644422	U	Standard	SYM	710-26.5	T422	850	1 500	SC	5	5	425	10 860
296-644025	U	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	850	1 500	SC	20	20	435	10 870
296-644020	U	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1 500	SC	30	30	425	10 750
OF Soft												
296-662020	U	Soft	SYM	650-24.5	FR, A342, A344	924	1 430	SC	92	92	462	10 610
296-661027	U	Soft	SYM	710-24.5	TRS2, T428, T440, T480, A344	873	1 430	SC	31	31	435	10 570
296-644026	U	Soft	OSS	710-26.5	TRS, TRS2, T440, A344, TiFG	905	1 500	SC	10	75	440	11 130
296-644022	U	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	905	1 500	SC	25	90	430	10 550
296-644021	U	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	924	1 500	SC	67	67	462	10 940
296-644023	U	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	873	1 500	SC	36	36	437	10 690
296-656020	U	Soft	SYM	800-26.5	FKF, FKF2, T440, T480	973	1 500	SC	36	36	486	11 430

U 29 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
U Standard												
596-644020	U	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1 500	SC	25	25	430	12 040
596-654021	U	Standard	SYM	750-26.5	FKF, TRS, A343, A344	850	1 720	SC	25	25	425	12 720
U Soft												
596-644023	U	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	873	1 500	SC	36	36	437	11 980



Baltic™

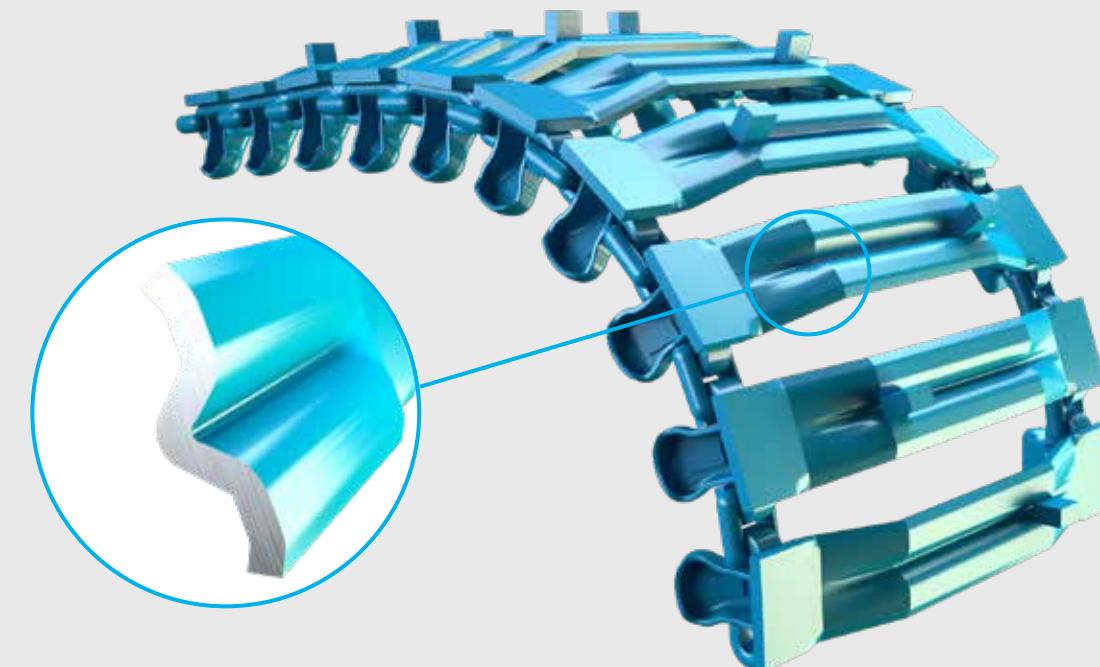

NARROW CROSS MEMBER



STANDARD CROSS MEMBER



SOFT CROSS MEMBER



GRIP FLOTATION SNOW



GRIP FLOTATION SNOW



GRIP FLOTATION SNOW

BALTIC 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
Baltic Narrow												
199-670026	Baltic	Narrow	SYM	600-24.5	TRS2	680	1 430	SC	0	0	360	8 820
089-652045	Baltic	Narrow	SYM	710-22.5	TRS, TRS2, T428, A344	770	1 300	SC	0	0	435	7 610
089-652020	Baltic	Narrow	SYM	710-22.5	FKF2, A643, A644	770	1 300	SC	0	0	430	7 610
089-652040	Baltic	Narrow	SYM	710-22.5	FKF, A331, A343	750	1 300	SC	0	0	420	7 610
199-661025	Baltic	Narrow	SYM	710-24.5	TRS2, T428, T440, T480, A344	770	1 430	SC	0	0	430	9 070
199-661020	Baltic	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	750	1 430	SC	0	0	425	8 770
199-644045	Baltic	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	770	1 500	SC	0	0	430	9 400
199-644040	Baltic	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	770	1 500	SC	0	0	425	9 400
Baltic Standard												
089-616030	Baltic	Standard	SYM	550-22.5	ELS, A328	650	1 300	SC	5	5	350	7 140
089-640115	Baltic	Standard	SYM	600-22.5	FKF2, TRS, TRS2, T428, A344, A644	730	1 300	SC	10	10	385	8 190
089-640111	Baltic	Standard	SYM	600-22.5	ELS, T404, T423	730	1 300	SC	20	20	375	8 190
089-640025	Baltic	Standard	SYM	600-22.5	A331	730	1 300	SC	30	30	365	8 190
199-670025	Baltic	Standard	SYM	600-24.5	TRS2	730	1 430	SC	10	10	365	9 210
199-624422	Baltic	Standard	SYM	600-26.5	T422	750	1 500	SC	10	10	375	9 450
199-624045	Baltic	Standard	SYM	600-26.5	TRS, TRS2, T440, T480, A344, A644	730	1 500	SC	10	10	385	9 350
199-624040	Baltic	Standard	SYM	600-26.5	FKF2, FR, T428, A343	730	1 500	SC	20	20	375	9 350
199-624020	Baltic	Standard	SYM	600-26.5	FKF	730	1 500	SC	30	30	365	9 350
199-653020	Baltic	Standard	SYM	650-26.5	ELS, TRS, A343, A344	730	1 720	SC	20	20	375	10 540
199-674000	Baltic	Standard	SYM	700-26	BEL 194	770	1 500	SC	10	10	405	9 830
199-655020	Baltic	Standard	SYM	800-24.5	FKF2	935	1 430	SC	28	28	470	12 220
Baltic Soft												
198-675000	Baltic	Soft	OSS	500-17.5	TVS	748	1 100	SC	45	113	340	6 900
198-640115	Baltic	Soft	SYM	600-22.5	FKF2, TRS, TRS2, T428, A344, A644	816	1 300	SC	50	50	408	8 860
198-624020	Baltic	Soft	SYM	600-26.5	FKF	816	1 500	SC	75	75	408	10 280
198-624422	Baltic	Soft	SYM	600-26.5	T422	816	1 500	SC	65	65	408	10 570
198-624040	Baltic	Soft	SYM	600-26.5	FKF2, FR, T428, A343	816	1 500	SC	65	65	408	10 280
198-653020	Baltic	Soft	SYM	650-26.5	T428	816	1 720	SC	55	55	408	12 130
198-652044	Baltic	Soft	ASYM	710-22.5	FKF, A331, A343	1060	1 300	SC	65	215	455	12 000
198-652049	Baltic	Soft	OSS	710-22.5	TRS, TRS2, T428, A344	1000	1 300	SC	0	200	395	12 010
198-652050	Baltic	Soft	OSS	710-22.5	FKF, A331, A343	1000	1 300	SC	10	210	400	12 000
198-652042	Baltic	Soft	OSS	710-22.5	FKF, A331, A343	890	1 300	SC	0	120	382	10 380

Only single cleat in price list, more options available

BALTIC 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
Baltic Soft												
198-652020	Baltic	Soft	SYM	710-22.5	FKF2, A643, A644	913	1 300	SC	65	65	457	10 090
198-652040	Baltic	Soft	SYM	710-22.5	FKF, A331, A343	913	1 300	SC	70	70	457	10 090
198-652047	Baltic	Soft	SYM	710-22.5	TRS, TRS2, T428, A344	913	1 300	SC	53	53	457	10 130
198-652046	Baltic	Soft	SYM	710-22.5	TRS, TRS2, T428, A344	1016	1 300	SC	110	110	508	11 370
198-652022	Baltic	Soft	SYM	710-22.5	FKF2, A643, A644	1016	1 300	SC	113	113	508	10 560
198-652041	Baltic	Soft	SYM	710-22.5	FKF, A331, A343	1016	1 300	SC	120	120	508	11 320
198-652048	Baltic	Soft	OSS	710-22.5	TRS, TRS2, T428, A344	925	1 300	SC	10	100	435	10 640
198-652043	Baltic	Soft	OSS	710-22.5	FKF, A331, A343	925	1 300	SC	30	120	420	10 380
198-661022	Baltic	Soft	OSS	710-24.5	FKF, FKF2, A343, A644	870	1 430	SC	20	60	425	11 030
198-661025	Baltic	Soft	SYM	710-24.5	TRS2, T428, T440, T480, A344	913	1 430	SC	60	60	457	11 690
198-661026	Baltic	Soft	SYM	710-24.5	FKF, FKF2, A343, A644	921	1 430	SC	65	65	461	12 810
198-661020	Baltic	Soft	SYM	710-24.5	FKF, FKF2, A343, A644	913	1 430	SC	65	65	457	11 250
198-661027	Baltic	Soft	OSS	710-24.5	TRS2, T428, T440, T480, A344	925	1 430	SC	10	100	435	11 550
198-661023	Baltic	Soft	OSS	710-24.5	FKF, FKF2, A343, A644	925	1 430	SC	20	115	425	11 550
198-644024	Baltic	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	925	1 500	SC	110	25	425	13 660
198-644025	Baltic	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	913	1 500	SC	55	55	457	11 700
198-644020	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	913	1 500	SC	65	65	457	11 700
198-644029	Baltic	Soft	OSS	710-26.5	TRS, TRS2, T440, A344, TiFG	1000	1 500	SC	0	200	435	14 190
198-644128	Baltic	Soft	OSS	710-26.5	TRS, TRS2, T440, A344, TiFG	925	1 500	SC	10	100	435	11 820
198-644424	Baltic	Soft	SYM	710-26.5	T422	1016	1 500	SC	100	100	508	12 380
198-644021	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1016	1 500	SC	115	115	508	12 320
198-644022	Baltic	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	890	1 500	SC	0	115	425	11 820

BALTIC 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
Baltic Narrow												
299-652040	Baltic	Narrow	SYM	710-22.5	FKF, A331, A343	750	1 300	SC	0	0	420	8 450

BALTIC 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
Baltic Narrow												
299-652045	Baltic	Narrow	SYM	710-22.5	TRS, TRS2, T428, A344	770	1 300	SC	0	0	435	8 640
299-661025	Baltic	Narrow	SYM	710-24.5	TRS2, T428, T440, T480, A344	770	1 430	SC	0	0	435	9 070
299-661020	Baltic	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	770	1 430	SC	0	0	425	9 070
299-644020	Baltic	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	760	1 500	SC	0	0	425	10 220
299-644026	Baltic	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	770	1 500	SC	0	0	435	9 660
299-654040	Baltic	Narrow	SYM	710-30.5	T428	760	1 720	SC	0	0	420	12 050
299-654020	Baltic	Narrow	SYM	750-26.5	FKF, TRS, A343, A344	770	1 720	SC	0	0	425	10 860
299-656020	Baltic	Narrow	SYM	800-26.5	FKF, FKF2, T440, T480, A644	870	1 500	SC	0	0	475	11 500
Baltic Standard												
299-643025	Baltic	Standard	SYM	500-26.5	A331	650	1 500	SC	35	35	325	8 700
299-624021	Baltic	Standard	SYM	600-26.5	FKF	730	1 500	SC	30	30	365	9 310
299-624041	Baltic	Standard	SYM	600-26.5	FR, FKF2, T428, A343	730	1 500	SC	30	30	375	9 310
299-653020	Baltic	Standard	SYM	650-26.5	ELS, TRS, A343, A344	730	1 720	SC	20	20	375	9 980
299-674000	Baltic	Standard	SYM	700-26	BEL 194	760	1 500	SC	5	5	405	10 220
299-652020	Baltic	Standard	SYM	710-22.5	FKF2, A643, A644	840	1 300	SC	20	20	430	10 280
299-661021	Baltic	Standard	SYM	710-24.5	FKF, FKF2, A343, A644	870	1 430	SC	40	40	435	9 770
299-644040	Baltic	Standard	SYM	710-26.5	Firestone, BKT	770	1 500	SC	15	15	400	10 280
299-644422	Baltic	Standard	SYM	710-26.5	T422	870	1 500	SC	18	18	430	11 130
299-644025	Baltic	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	860	1 500	SC	25	25	435	10 280
299-644022	Baltic	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	860	1 500	SC	35	35	430	11 760
299-654070	Baltic	Standard	SYM	750-26.5	A643, T480	935	1 720	SC	58	58	468	13 820
299-654021	Baltic	Standard	SYM	750-26.5	FKF, TRS, A343, A344	840	1 720	SC	25	25	425	13 260
299-654080	Baltic	Standard	SYM	750-26.5	FKF2	935	1 720	SC	38	38	468	12 080
299-654060	Baltic	Standard	SYM	750-26.5	T428	870	1 720	SC	30	30	435	11 200
299-654060	Baltic	Standard	SYM	750-30.5	T428	870	1 720	SC	30	30	435	11 200
299-663020	Baltic	Standard	SYM	750-26.5	TRS2	935	1 720	SC	48	48	468	12 390
299-663020	Baltic	Standard	SYM	780-26.5	FKF	935	1 720	SC	48	48	468	12 390
299-673020	Baltic	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	935	1 720	SC	38	38	468	12 390
299-656030	Baltic	Standard	SYM	800-26.5	TRS2, A344	935	1 500	SC	13	13	485	10 800
299-677000	Baltic	Standard	SYM	870-26.5	A344	935	1 500	SC	5	5	493	12 990

Only single cleat in price list, more options available

BALTIC 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
Baltic Soft												
298-624020	Baltic	Soft	SYM	600-26.5	FKF	816	1 500	SC	73	73	408	9 870
298-653020	Baltic	Soft	SYM	650-26.5	ELS, TRS, A343, A344	816	1 720	SC	63	63	408	11 340
298-652043	Baltic	Soft	OSS	710-22.5	FKF, A331, A343	920	1 300	SC	27	113	420	9 500
298-652045	Baltic	Soft	OSS	710-22.5	TRS, TRS2, T428, A344	925	1 300	SC	15	100	435	9 500
298-652042	Baltic	Soft	ASYM	710-22.5	FKF, A331, A343	1060	1 300	SC	65	215	455	12 380
298-652046	Baltic	Soft	OSS	710-22.5	TRS, TRS2, T428, A344	1000	1 300	SC	0	200	435	12 180
298-652020	Baltic	Soft	SYM	710-22.5	FKF2, A643, A644	913	1 300	SC	57	57	457	9 980
298-661027	Baltic	Soft	OSS	710-24.5	TRS2, T428, T440, T480, A344	925	1 430	SC	12	103	435	10 290
298-661023	Baltic	Soft	OSS	710-24.5	FKF, FKF2, A343, A644	925	1 430	SC	22	113	425	10 290
298-661025	Baltic	Soft	SYM	710-24.5	TRS2, T428, T440, T480, A344	921	1 430	SC	56	56	461	12 080
298-661035	Baltic	Soft	ASYM	710-24.5	TRS2, T428, T440, T480, A344	1060	1 430	SC	50	200	455	12 680
298-644030	Baltic	Soft	ASYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1060	1 500	SC	60	210	455	13 890
298-644029	Baltic	Soft	OSS	710-26.5	TRS, TRS2, T440, A344, TiFG	1000	1 500	SC	0	200	435	13 390
298-644033	Baltic	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1000	1 500	SC	0	219	425	12 990
298-644025	Baltic	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	1015	1 500	SC	103	103	508	12 870
298-644021	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1015	1 500	SC	113	113	508	13 130
298-644031	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1210	1 500	SC	210	210	605	14 550
298-644024	Baltic	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	880	1 500	SC	0	110	425	12 390
298-644422	Baltic	Soft	SYM	710-26.5	T422	921	1 500	SC	51	51	461	12 390
298-644020	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	920	1 500	SC	65	65	460	12 390
298-644032	Baltic	Soft	ASYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1110	1 500	SC	105	205	505	14 280
298-644421	Baltic	Soft	OSS	710-26.5	T422	925	1 500	SC	15	80	420	12 410
298-644028	Baltic	Soft	OSS	710-26.5	TRS, TRS2, T440, A344, TiFG	925	1 500	SC	15	100	435	12 500
298-644023	Baltic	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	925	1 500	SC	25	110	420	12 250
298-644423	Baltic	Soft	ASYM	710-26.5	T422	1060	1 500	SC	50	180	465	13 920
298-644035	Baltic	Soft	ASYM	710-26.5	TRS, TRS2, T440, A344, TiFG	1060	1 500	SC	50	200	455	13 920
298-680025	Baltic	Soft	SYM	710-28.5	TRS2, A644	921	1 720	SC	56	56	461	14 310
298-654081	Baltic	Soft	SYM	750-26.5	FKF2	925	1 720	SC	0	75	460	12 270

BALTIC 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
Baltic Soft												
298-654030	Baltic	Soft	ASYM	750-26.5	FKF, TRS, A343, A344	1060	1 720	SC	60	210	455	14 280
298-654080	Baltic	Soft	OSS	750-26.5	FKF2	1023	1 720	SC	82	82	512	13 430
298-654021	Baltic	Soft	SYM	750-26.5	FKF, TRS, A343, A344	1023	1 720	SC	115	115	512	13 850
298-654070	Baltic	Soft	SYM	750-26.5	A643, T480	1015	1 720	SC	98	98	508	14 560
298-654020	Baltic	Soft	SYM	750-26.5	FKF, TRS, A343, A344	921	1 720	SC	71	71	461	12 990
298-654060	Baltic	Soft	SYM	750-26.5	T428	921	1 720	SC	48	48	461	12 870
298-654060	Baltic	Soft	SYM	750-30.5	T428	921	1 720	SC	48	48	461	12 870
298-654061	Baltic	Soft	ASYM	750-26.5	T428	1060	1 720	SC	50	190	460	13 920
298-654061	Baltic	Soft	ASYM	750-30.5	T428	1060	1 720	SC	50	190	460	13 920
298-663021	Baltic	Soft	SYM	750-26.5	TRS2	1015	1 720	SC	85	85	508	13 430
298-663021	Baltic	Soft	SYM	780-26.5	FKF	1015	1 720	SC	85	85	508	13 430
298-663022	Baltic	Soft	OSS	750-26.5	TRS2	1035	1 720	SC	10	185	450	14 960
298-663022	Baltic	Soft	OSS	780-26.5	FKF	1035	1 720	SC	10	185	450	14 960
298-663020	Baltic	Soft	OSS	750-26.5	TRS2	925	1 720	SC	9	76	450	13 820
298-663020	Baltic	Soft	OSS	780-26.5	FKF	925	1 720	SC	9	76	450	13 820
298-663032	Baltic	Soft	ASYM	750-26.5	TRS2	1110	1 720	SC	85	185	505	15 420
298-663032	Baltic	Soft	ASYM	780-26.5	FKF	1110	1 720	SC	85	185	505	15 420
298-673021	Baltic	Soft	ASYM	780-28.5	FKF2, TRS2, T480, A643, A644	1110	1 720	SC	75	175	505	14 550
298-673020	Baltic	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	1023	1 720	SC	82	82	512	13 620
298-655021	Baltic	Soft	OSS	800-24.5	FKF2	925	1 430	SC	0	65	470	11 630
298-655022	Baltic	Soft	OSS	800-24.5	FKF2	1035	1 430	SC	0	165	470	12 980
298-656028	Baltic	Soft	OSS	800-26.5	TRS2, A344	1095	1 500	SC	35	150	490	13 560
298-656027	Baltic	Soft	OSS	800-26.5	TRS2, A344	1035	1 500	SC	0	145	485	13 030
298-656022	Baltic	Soft	OSS	800-26.5	FKF, FKF2, T440, T480, A644	1035	1 500	SC	0	160	475	13 190
298-656026	Baltic	Soft	ASYM	800-26.5	TRS2, A344	1110	1 500	SC	50	150	505	13 970
298-656025	Baltic	Soft	SYM	800-26.5	TRS2, A344	1015	1 500	SC	53	53	508	12 690
298-656021	Baltic	Soft	SYM	800-26.5	FKF, FKF2, T440, T480, A644	1015	1 500	SC	63	63	508	12 870
298-677020	Baltic	Soft	SYM	870-26.5	A344	1210	1 500	SC	143	143	605	14 700


BALTIC 29 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
Baltic Narrow												
599-644021	Baltic	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	760	1 500	SC	0	0	425	11 970
599-654021	Baltic	Narrow	SYM	750-26.5	FKF, TRS, A343, A344	760	1 720	SC	0	0	425	13 340
Baltic Standard												
599-654081	Baltic	Standard	SYM	750-26.5	FKF, TRS, A343, A344	935	1 720	SC	38	38	468	14 600
599-673021	Baltic	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	935	1 720	SC	38	38	468	13 880
Baltic Soft												
599-644020	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	921	1 500	SC	66	66	461	13 340
599-654020	Baltic	Soft	SYM	750-26.5	FKF, TRS, A343, A344	921	1 720	SC	66	66	461	14 550
599-654080	Baltic	Soft	SYM	750-26.5	FKF2	1015	1 720	SC	78	78	508	15 050
599-673020	Baltic	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	1015	1 720	SC	78	78	508	15 260

BALTIC 30 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
Baltic Standard												
499-656021	Baltic	Standard	SYM	800-26.5	FKF, FKF2, T440, T480, A644	935	1 500	SC	28	28	476	13 020
Baltic Soft												
498-644020	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1015	1 500	SC	113	113	508	13 620
498-654000	Baltic	Soft	SYM	750-26.5	FKF, TRS, A343, A344	921	1 720	SC	66	66	461	14 430
498-656020	Baltic	Soft	SYM	800-26.5	FKF, FKF2, T440, T480, A644	1015	1 500	SC	68	68	508	13 650



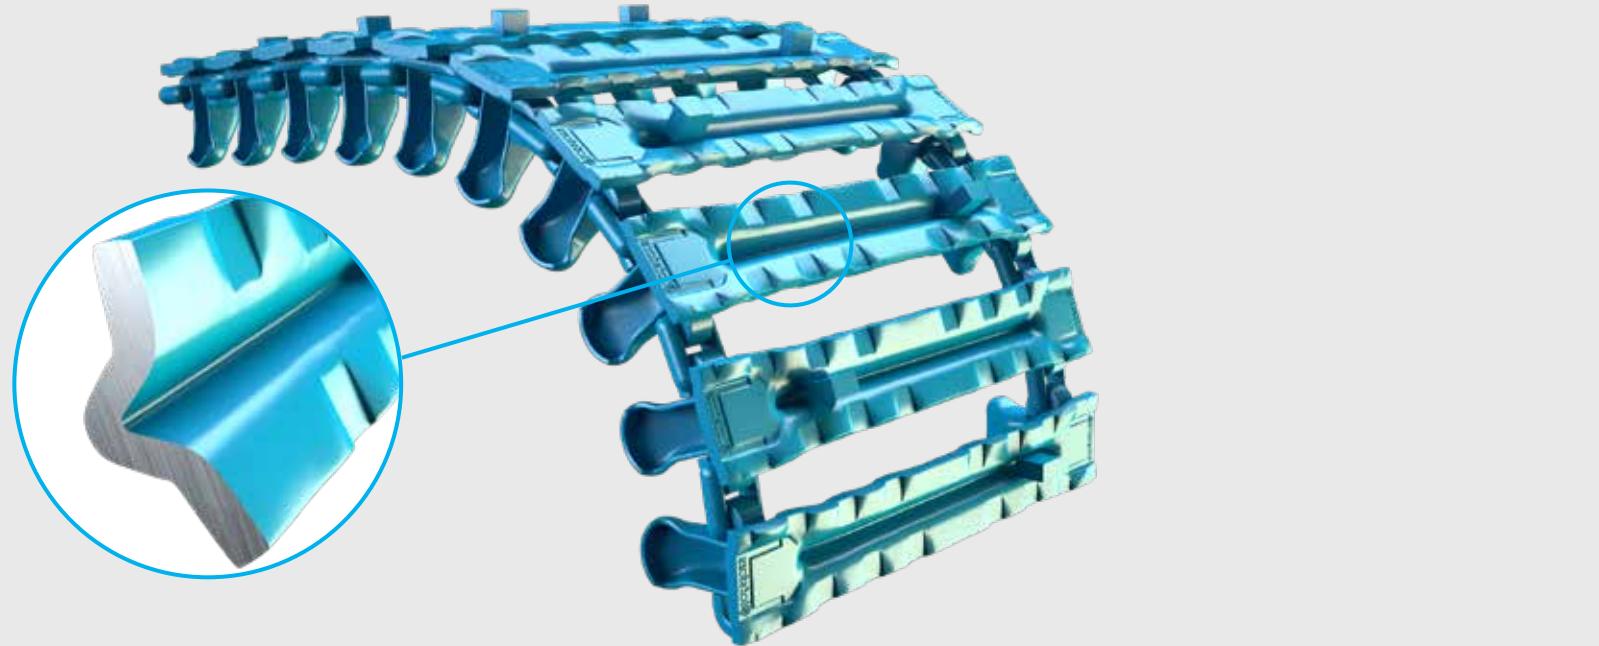

NARROW CROSS MEMBER



STANDARD CROSS MEMBER



SOFT CROSS MEMBER



M (STD)



M-SOFT




GRIP FLOTATION SNOW



GRIP FLOTATION SNOW



GRIP FLOTATION SNOW



GRIP FLOTATION SNOW



GRIP FLOTATION SNOW

COVERX 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
Baltic Narrow												
177-652028	CoverX	Narrow	SYM	710-22.5	TRS, TRS2, T428, A344	780	1 300	SC	0	0	440	8 990
177-661026	CoverX	Narrow	SYM	710-24.5	TRS2, T428, T440, T480, A344	781	1 430	SC	0	0	435	9 540
177-644028	CoverX	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	781	1 500	SC	0	0	440	10 100
Baltic Standard												
177-662020	CoverX	Standard	SYM	650-24.5	FR, A342, A344	760	1 430	SC	15	15	392	9 270
177-661020	CoverX	Standard	SYM	710-24.5	FKF, FKF2, A343, A644	820	1 430	SC	20	20	420	9 850
Baltic Soft												
177-624045	CoverX	Soft	SYM	600-26.5	TRS, TRS2, T440, T480, A344, A644	820	1 500	SC	55	55	440	10 550
177-652021	CoverX	Soft	OSS	710-22.5	FKF2, A643, A644	930	1 300	SC	25	115	422	9 830
177-652045	CoverX	Soft	OSS	710-22.5	TRS, TRS2, T428, A344	930	1 300	SC	10	100	437	9 900
177-652040	CoverX	Soft	OSS	710-22.5	FKF, A331, A343	930	1 300	SC	30	120	420	9 900
177-652041	CoverX	Soft	OSS	710-22.5	FKF, A331, A343	890	1 300	SC	0	120	417	9 620
177-644025	CoverX	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	920	1 500	SC	50	50	460	10 990
177-644021	CoverX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	919	1 500	SC	60	60	460	10 990
177-644029	CoverX	Soft	OSS	710-26.5	TRS, TRS2, T440, A344, TIFG	930	1 500	SC	10	100	437	11 130
177-644001	CoverX	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	930	1 500	SC	25	115	422	11 200
177-680025	CoverX	Soft	SYM	710-28.5	TRS2, A644	919	1 720	SC	60	60	460	12 440

COVERX 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
CoverX Narrow												
277-661022	CoverX	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	760	1 430	SC	0	0	425	11 090
277-661026	CoverX	Narrow	SYM	710-24.5	TRS2, T428, T440, T480, A344	781	1 430	SC	0	0	440	11 270
277-644002	CoverX	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	781	1 500	SC	0	0	430	11 970
277-644028	CoverX	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	780	1 500	SC	0	0	440	11 940
CoverX Standard												
277-644010	CoverX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1 500	SC	30	30	425	12 500
CoverX Soft												

Only single cleat in price list, more options available

COVERX 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
CoverX Soft												
277-652040	CoverX	Soft	SYM	710-22.5	FKF, A331, A343	919	1 300	SC	70	70	460	11 660
277-652020	CoverX	Soft	OSS	710-22.5	FKF2, A643, A644	890	1 300	SC	0	110	428	10 060
277-652041	CoverX	Soft	OSS	710-22.5	FKF, A331, A343	930	1 300	SC	30	120	420	11 870
277-661000	CoverX	Soft	SYM	710-24.5	FKF, FKF2, A343, A644	1020	1 430	SC	115	115	510	13 360
277-661027	CoverX	Soft	OSS	710-24.5	TRS2, T428, T440, T480, A344	850	1 430	SC	0	50	438	11 830
277-661021	CoverX	Soft	OSS	710-24.5	FKF, FKF2, A343, A644	850	1 430	SC	0	70	423	11 840
277-661025	CoverX	Soft	SYM	710-24.5	TRS2, T428, T440, T480, A344	920	1 430	SC	10	10	460	12 450
277-661020	CoverX	Soft	SYM	710-24.5	FKF, FKF2, A343, A644	919	1 430	SC	65	65	460	12 450
277-661023	CoverX	Soft	OSS	710-24.5	FKF, FKF2, A343, A644	760	1 430	SC	25	115	420	12 640
277-661029	CoverX	Soft	OSS	710-24.5	TRS2, T428, T440, T480, A344	930	1 430	SC	0	100	438	12 640
277-644011	CoverX	Soft	ASYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1019	1 500	SC	65	165	460	14 510
277-644027	CoverX	Soft	ASYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	970	1 500	SC	40	110	460	14 340
277-644003	CoverX	Soft	ASYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1120	1 500	SC	110	210	510	15 230
277-644024	CoverX	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1000	1 500	SC	0	210	428	14 400
277-644026	CoverX	Soft	ASYM	710-26.5	TRS, TRS2, T440, A344, TiFG	1066	1 500	SC	54	202	460	15 000
277-644029	CoverX	Soft	OSS	710-26.5	TRS, TRS2, T440, A344, TiFG	920	1 500	SC	0	160	438	13 790
277-644001	CoverX	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	930	1 500	SC	20	110	428	13 760
277-644022	CoverX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1220	1 500	SC	210	210	610	16 980
277-644000	CoverX	Soft	ASYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1070	1 500	SC	60	210	460	15 140
277-644023	CoverX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1020	1 500	SC	110	110	510	14 650
277-644004	CoverX	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1 500	SC	0	60	428	12 600
277-644025	CoverX	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	920	1 500	SC	50	50	460	13 590
277-644021	CoverX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	920	1 500	SC	64	64	460	13 590
277-680026	CoverX	Soft	OSS	710-28.5	TRS2, A644	1070	1 720	SC	55	205	460	16 840
277-654040	CoverX	Soft	SYM	710-30.5	T428	919	1 720	SC	75	75	460	15 120
277-654082	CoverX	Soft	OSS	750-26.5	FKF2	985	1 720	SC	0	125	463	16 150
277-654081	CoverX	Soft	SYM	750-26.5	FKF2	1020	1 720	SC	80	80	510	16 290
277-663020	CoverX	Soft	SYM	750-26.5	TRS2	1020	1 720	SC	90	90	510	16 300

COVERX 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
CoverX Soft												
277-663020	CoverX	Soft	SYM	780-26.5	FKF	1020	1 720	SC	90	90	510	16 300
277-673020	CoverX	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	1020	1 720	SC	80	80	510	16 290
277-656021	CoverX	Soft	SYM	800-26.5	FKF, FKF2, T440, T480, A644	1070	1 500	SC	65	65	535	15 600
277-656026	CoverX	Soft	ASYM	800-26.5	TRS2, A344	1070	1 500	SC	55	105	510	15 240
277-656027	CoverX	Soft	SYM	800-26.5	TRS2, A344	1020	1 500	SC	55	55	510	14 180
277-656025	CoverX	Soft	OSS	800-26.5	TRS2, A344	995	1 500	SC	0	105	483	14 600
277-656023	CoverX	Soft	OSS	800-26.5	FKF, FKF2, T440, T480, A644	995	1 500	SC	0	115	473	14 180
277-656022	CoverX	Soft	SYM	800-26.5	FKF, FKF2, T440, T480, A644	1020	1 500	SC	65	65	510	14 700

COVERX 29 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
CoverX Soft												
577-644021	CoverX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	920	1 500	SC	60	60	460	14 580
577-673020	CoverX	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	1020	1 720	SC	80	80	510	17 920
577-656020	CoverX	Soft	SYM	800-26.5	FKF, FKF2, T440, T480, A644	1020	1 500	SC	65	65	510	15 660

Long bogie



Long bogie - CC 1690, 1890, 1980 and 3000.

LONG BOGIE 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
ECO Narrow												
097-644625	ECO	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	778	1690	SC	0	0	435	10 400
Baltic Soft												
198-644040	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	913	3000	SC	65	65	457	16 550

LONG BOGIE 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EX Standard												
290-644620	EX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	866	1690	SC	33	33	433	11 050
290-644031	EX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	866	1890	SC	33	33	433	11 660
OF Standard												
295-644625	OF	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	850	1690	SC	20	20	435	10 170
295-644042	OF	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1890	SC	20	20	430	10 720
295-644620	OF	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1690	SC	20	20	430	10 160
EVO Standard												
294-644042	EVO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1690	SC	20	20	430	10 400
294-644030	EVO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1880	SC	20	20	430	10 630
294-654030	EVO	Standard	SYM	750-26.5	FKF, TRS, A343, A344	840	1880	SC	20	20	430	11 340
294-654092	EVO	Standard	SYM	750-26.5	FKF2	915	1980	SC	23	23	465	12 080
294-673032	EVO	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	915	1980	SC	20	20	465	12 480
EVO Soft												
294-627000	EVO	Soft	SYM	30.5-32	FS	960	1980	SC	25	25	485	14 780
294-644032	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	960	1890	SC	80	80	480	11 740
294-644041	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	3000	SC	55	55	453	14 440
294-644031	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1880	SC	55	55	453	11 080
294-644625	EVO	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	906	1690	SC	43	43	453	10 980
294-644621	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1690	SC	53	53	453	10 990
294-654031	EVO	Soft	SYM	750-26.5	FKF, TRS, A343, A344	906	1880	SC	50	50	453	12 180
ECO Narrow												
297-644625	ECO	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	790	1690	SC	0	0	440	11 220

Only single cleat in price list, more options available

Long bogie

LONG BOGIE 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
ECO Standard												
297-644023	ECO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	3000	SC	25	25	430	16 600
297-644031	ECO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1890	SC	25	25	430	12 080
297-644626	ECO	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	850	1690	SC	15	15	430	11 690
297-644620	ECO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1690	SC	25	25	430	11 690
297-654030	ECO	Standard	SYM	750-26.5	FKF, TRS, A343, A344	850	1880	SC	30	30	425	12 060
297-673030	ECO	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	880	1890	SC	10	10	460	12 820
297-656023	ECO	Standard	SYM	800-26.5	FKF, FKF2, T440, T480, A644	944	1890	SC	27	27	475	12 500
ECO Soft												
227-644030	ECO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	905	1890	SC	63	63	453	13 300
KovaX Narrow												
288-644043	KovaX	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	770	1980	SC	0	0	430	10 800
288-644044	KovaX	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	770	1890	SC	0	0	430	9 590
KovaX Standard												
288-644624	KovaX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1690	SC	25	25	430	10 170
KovaX Soft												
288-644041	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	903	3000	SC	51	51	452	15 550
288-644623	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	950	1690	SC	75	75	475	10 900
288-644042	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	950	1880	SC	75	75	475	11 770
288-644625	KovaX	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	905	1690	SC	42	42	453	10 590
288-644620	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	905	1690	SC	52	52	453	10 590
288-644030	KovaX	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	836	1890	SC	0	51	430	10 800
288-644040	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	903	1880	SC	53	53	452	11 160
288-654030	KovaX	Soft	SYM	750-26.5	FKF, TRS, A343, A344	903	1880	SC	52	52	452	12 180
288-673001	KovaX	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	950	1890	SC	40	40	475	12 320
Combination ECO-Baltic Standard												
279-644030	ECO-Baltic	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850/840	1890	SC	25	25	430	12 600
Combination EVO-Baltic Standard												
249-644625	EVO-Baltic	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	870/860	1690	SC	25	25	440	12 210
249-644030	EVO-Baltic	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840/840	1890	SC	20	20	430	13 140

LONG BOGIE 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
U Standard												
296-644030	U	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1890	SC	30	30	425	12 050
296-654031	U	Standard	SYM	750-26.5	FKF, TRS, A343, A344	850	1890	SC	30	30	425	12 080
U Soft												
296-644031	U	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	924	1890	SC	67	67	462	12 600
Baltic Narrow												
299-644620	Baltic	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	760	1690	SC	0	0	425	11 460
Baltic Standard												
299-656040	Baltic	Standard	SYM	800-26.5	TRS2, A344	935	1690	SC	5	5	485	12 310
299-656031	Baltic	Standard	SYM	800-26.5	TRS2, A344	935	1890	SC	13	13	485	12 600
Baltic Soft												
298-644034	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	921	1890	SC	66	66	461	13 870
298-644005	Baltic	Soft	OSS	710-26.5	TRS, TRS2, T440, A344, TiFG	925	1890	SC	15	100	435	13 820
298-644044	Baltic	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	925	1890	SC	25	110	425	13 250
298-644040	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	921	3000	SC	65	65	461	17 330
298-644041	Baltic	Soft	ASYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1060	3000	SC	65	215	455	18 910
298-644000	Baltic	Soft	ASYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1110	1890	SC	110	210	505	15 740
298-644036	Baltic	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1000	1890	SC	0	210	435	15 080
298-644042	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1015	3000	SC	108	108	508	18 680
298-644130	Baltic	Soft	ASYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1060	1880	SC	60	210	455	14 490
298-644131	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1015	1890	SC	113	113	508	13 830
298-644026	Baltic	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	921	1690	SC	55	55	461	12 880
298-644043	Baltic	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	925	1980	SC	25	110	425	13 370
298-654090	Baltic	Soft	SYM	750-26.5	FKF2	1015	1980	SC	78	78	508	15 720
298-654023	Baltic	Soft	SYM	750-26.5	FKF, TRS, A343, A344	921	1980	SC	70	70	461	13 840
298-656626	Baltic	Soft	ASYM	800-26.5	TRS2, A344	1110	1690	SC	50	150	505	14 910
298-656023	Baltic	Soft	SYM	800-26.5	FKF, FKF2, T440, T480, A644	1015	1890	SC	63	63	508	13 760
298-656030	Baltic	Soft	SYM	800-26.5	TRS2, A344	1015	1890	SC	53	53	508	14 560
CoverX Narrow												
277-644033	CoverX	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	781	1890	SC	0	0	430	13 240
CoverX Soft												
277-644042	CoverX	Soft	ASYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1070	1890	SC	65	215	460	16 350
277-644031	CoverX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1020	1890	SC	110	110	510	15 880

Only single cleat in price list, more options available

Long bogie

LONG BOGIE 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
CoverX Soft												
277-644040	CoverX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	919	3000	SC	60	60	459,5	18 900
277-644625	CoverX	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	919	1690	SC	50	50	459,5	13 980
277-644030	CoverX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	920	1890	SC	60	60	460	14 720
277-644621	CoverX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	919	1690	SC	60	60	459,5	13 980
277-644034	CoverX	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	930	1890	SC	25	115	423	14 880
277-644032	CoverX	Soft	ASYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	970	1890	SC	60	110	460	15 650
277-644626	CoverX	Soft	ASYM	710-26.5	TRS, TRS2, T440, A344, TiFG	1071	1690	SC	50	200	460	15 510
277-656031	CoverX	Soft	ASYM	800-26.5	FKF, FKF2, T440, T480, A644	1070	1890	SC	65	115	510	16 360
277-656035	CoverX	Soft	SYM	800-26.5	TRS2, A344	1020	1890	SC	55	55	510	15 890
277-656032	CoverX	Soft	SYM	800-26.5	FKF, FKF2, T440, T480, A644	1020	1890	SC	65	65	510	15 860

LONG BOGIE 29 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EVO Standard												
594-673030	EVO	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	915	1980	SC	23	23	465	13 990
EVO Soft												
594-644021	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1500	SC	53	53	453	11 350

LONG BOGIE 30 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EX Standard												
490-654082	EX	Standard	SYM	750-26.5	FKF2	905	1890	SC	23	23	465,5	14 740
490-654081	EX	Standard	SYM	750-26.5	FKF2	905	1980	SC	17,5	17,5	470,5	14 870
490-663001	EX	Standard	SYM	750-26.5	TRS2	866	1980	SC	8	8	460,5	14 870

LONG BOGIE 30 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EX Standard												
490-663001	EX	Standard	SYM	780-26.5	FKF	866	1980	SC	8	8	460,5	14 870
490-663002	EX	Standard	SYM	750-26.5	TRS2	866	1890	SC	8	8	460,5	14 740
490-663002	EX	Standard	SYM	780-26.5	FKF &	866	1890	SC	8	8	460,5	14 740
OF Soft												
495-644620	OF	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1690	SC	53	53	453	12 830
EVO Soft												
494-654030	EVO	Soft	SYM	750-26.5	FKF, TRS, A343, A344	906	1980	SC	53	53	453	15 550
KovaX Soft												
488-673030	KovaX	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	950	1980	SC	45	45	475	14 670
488-673031	KovaX	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	950	1890	SC	45	45	475	14 550
Baltic Soft												
498-654052	Baltic	Soft	SYM	750-26.5	FKF, TRS, A343, A344	921	1880	SC	66	66	461	14 920
498-654081	Baltic	Soft	ASYM	750-26.5	FKF2	1110	1890	SC	75	175	505	17 070
498-654080	Baltic	Soft	ASYM	750-26.5	FKF2	1110	1980	SC	76	176	505	17 200

LONG BOGIE MAX LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
OF Soft												
395-673030	OF	Narrow	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	840	1980	SC	0	0	454	14 810
395-673031	OF	Narrow	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	840	1890	SC	0	0	459	14 680
OF Soft												
395-644021	OF	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1890	SC	53	53	453	14 310
395-654030	OF	Soft	SYM	750-26.5	FKF, TRS, A343, A344	906	1980	SC	58	58	453	14 810
395-654031	OF	Soft	SYM	750-26.5	FKF, TRS, A343, A344	906	1890	SC	48	48	453	14 810
EVO Standard												
394-624041	EVO	Standard	SYM	600-26.5	FKF2, FR, T428, A343	740	1890	SC	15	15	373,5	13 340
394-644032	EVO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1880	SC	20	20	420	13 680
394-644632	EVO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1690	SC	15	15	423,5	12 990

Only single cleat in price list, more options available

Long bogie

LONG BOGIE MAX LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EVO Standard												
394-680030	EVO	Standard	SYM	710-28.5	FKF2	840	1890	SC	12	12	426	15 420
394-654087	EVO	Standard	SYM	750-26.5	FKF2	915	1890	SC	23	23	458	14 640
394-654086	EVO	Standard	SYM	750-26.5	FKF2	915	1980	SC	23	23	458	14 750
EVO Soft												
394-644002	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1880	SC	53	53	453	14 490
394-644005	EVO	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	906	1890	SC	43	43	453	14 490
394-644001	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	960	1880	SC	80	80	480	14 540
394-644620	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1690	SC	48	48	453	14 120
394-654030	EVO	Soft	SYM	750-26.5	FKF, TRS, A343, A344	960	1880	SC	75	75	480	14 640
394-673030	EVO	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	960	1980	SC	45	45	480	15 180
394-673031	EVO	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	960	1890	SC	40	40	480	15 060
394-656030	EVO	Soft	SYM	800-26.5	FKF, FKF2, T440, T480, A644	960	1890	SC	30	30	480	15 710
ECO Soft												
327-644040	ECO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	916	3000	SC	63	63	458	20 150
KovaX Standard												
388-644040	KovaX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1880	SC	25	25	425	14 310
KovaX Soft												
388-644042	KovaX	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	905	1890	SC	30	75	430	14 680
388-644041	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	903	1880	SC	52	52	452	14 810
Baltic Soft												
398-644020	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	913	1980	SC	56	56	457	14 950



Conventional tracks™



CONVENTIONAL 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
OF Narrow												
090-624040DB	OF	Narrow	SYM	600-26.5	FKF, FKF2, FR, TRS, TRS2, T428, T440, T480, A343, A344	780	1500	DC	0	0	408	7 070
OF Standard												
090-624040	OF	Standard	SYM	600-26.5	FKF, FKF2, FR, TRS, TRS2, T428, T440, T480, A343, A344	780	1500	SC	13	13	408	6 750
090-653020	OF	Standard	SYM	600-30.5	A331	780	1720	SC	13	13	408	8 050
090-653020	OF	Standard	SYM	650-26.5	ELS, TRS, A343, A344	780	1720	SC	13	13	408	8 050
090-644020	OF	Standard	SYM	710-26.5	FKF, FKF2, TRS, TRS2, FR, ELS, T428, T440, A343, A344, TiHF, TiFF, TiFG, FsB	880	1500	SC	13	13	458	7 390
090-654020	OF	Standard	SYM	710-30.5	T428	880	1720	SC	13	13	458	8 800
090-654020	OF	Standard	SYM	750-26.5	FKF, TRS, A343, A344	880	1720	SC	13	13	458	8 800
Combination OF-U Narrow												
091-654020	OF-U	Narrow	SYM	710-30.5	T428	855	1720	SC	0	0	458	9 450
091-654020	OF-U	Narrow	SYM	750-26.5	FKF, TRS, A343, A344	855	1720	SC	0	0	458	9 450
Combination OF-U Standard												
091-624040	OF-U	Standard	SYM	600-26.5	FKF, FKF2, FR, TRS, TRS2, T428, T440, T480, A343, A344	780/730	1500	SC	18	18	395	7 390
091-653020	OF-U	Standard	SYM	600-30.5	A331	766	1720	SC	6	6	408	8 560
091-653020	OF-U	Standard	SYM	650-26.5	ELS, TRS, A343, A344	766	1720	SC	6	6	408	8 560
091-644020	OF-U	Standard	SYM	710-26.5	FKF, FKF2, TRS, TRS2, FR, ELS, T428, T440, A343, A344, TiHF, TiFF, TiFG, FsB	880	1500	SC	13	13	458	7 830
091-680020	OF-U	Standard	SYM	710-28.5	FKF2	880	1720	SC	13	13	458	9 000
U Narrow												
092-644020	U	Narrow	SYM	710-26.5	FKF, FKF2, TRS, TRS2, FR, ELS, T428, T440, A343, A344, TiHF, TiFF, TiFG, FsB	854	1500	SC	0	0	458	8 140
092-654020	U	Narrow	SYM	750-26.5	FKF, TRS, A343, A344	854	1720	SC	0	0	458	9 610
U Standard												
092-640020	U	Standard	SYM	600-22.5	FKF2, TRS, TRS2, T428, A344	766	1300	SC	6	6	408	6 850
092-624040	U	Standard	SYM	600-26.5	FKF, FKF2, FR, TRS, TRS2, T428, T440, T480, A343, A344	730	1500	SC	13	13	365	7 610

CONVENTIONAL 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
OF-U Standard												
291-644020	OF-U	Standard	SYM	710-26.5	FKF, FKF2, TRS, TRS2, FR, ELS, T428, T440, A343, A344, TiHF, TiFF, TiFG, FsB	890	1500	SC	18	18	458	8 970
291-654020	OF-U	Standard	SYM	710-30.5	T428	890	1720	SC	18	18	458	10 210
291-654020	OF-U	Standard	SYM	750-26.5	FKF, TRS, A343, A344	890	1720	SC	18	18	458	10 210


Only single cleat in price list, more options available

CTL Wheel Tracks™

EX



OF




EVO




ECO



BALTIC



KOVAX




LITE



Reduced dimension and weight
of the cross member

BALTIC – CTL

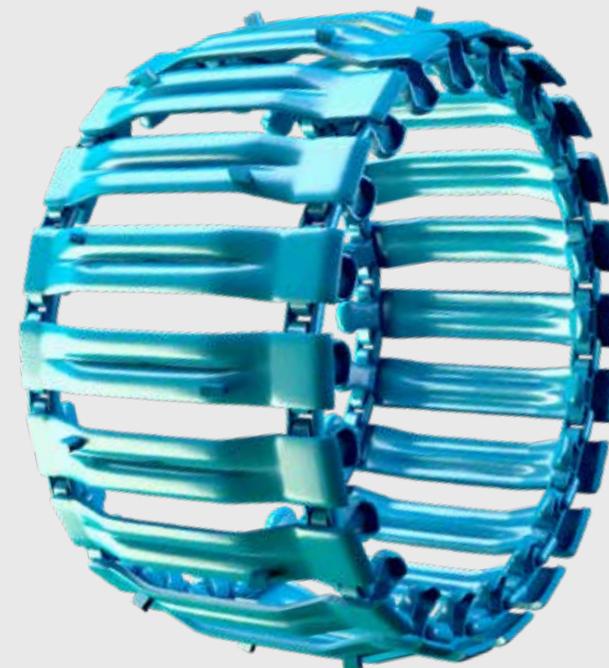


WHEEL TRACK 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EX Narrow												
093-658038	EX	Narrow	SYM	710/70-34	FR, TRS2+	774	N/A	DC	0	0	410	7 650
EX Standard												
093-625002	EX	Standard	SYM	600-34	FR, TRS2+	774	N/A	DC	32	32	387	5 870
093-628044	EX	Standard	SYM	700/55-34	TRS	866	N/A	DC	33	33	433	6 660
093-658023	EX	Standard	SYM	700/70-34	TRS	866	N/A	DC	28	28	435	7 800
093-628040	EX	Standard	SYM	710/55-34	T422	866	N/A	DC	13	13	450	6 660
093-628028	EX	Standard	SYM	710/55-34	FR, TRS2+	866	N/A	DC	23	23	440	6 660
093-658028	EX	Standard	SYM	710/70-34	FR, TRS2+	866	N/A	DC	23	23	440	7 790
093-658027	EX	Standard	SYM	750-34	T422	905	N/A	DC	47	47	453	8 100
OF Narrow												
093-628051	OF	Narrow	SYM	710/55-34	TRS	780	N/A	DC	0	0	430	7 420
OF Standard												
093-625006	OF	Standard	SYM	600-34	FR, TRS2+	750	N/A	DC	20	20	375	7 150
093-658024	OF	Standard	SYM	700/70-34	TRS	840	N/A	DC	15	15	435	7 280
093-658030	OF	Standard	SYM	700/70-34	TRS	840	N/A	DC	10	10	435	7 400
093-658046	OF	Standard	SYM	710/70-34	FR, TRS2+	840	N/A	DC	10	10	440	7 540
093-654023	OF	Standard	SYM	750-26.5	FKF, TRS, A343, A344	840	N/A	DC	15	15	435	7 280
EVO Standard												
093-628054	EVO	Standard	SYM	710/55-34	TRS	865	N/A	DC	32	32	433	6 220
EVO-L Standard												
093-625000	EVO	Lite	SYM	600-34	FR, TRS2+	740	N/A	DC	15	15	385	5 830
093-625003	EVO	Lite	SYM	600-34	T422	740	N/A	DC	15	15	385	6 100
093-625001	EVO	Lite	SYM	600-34	FR, TRS2+	740	N/A	DC	15	15	385	6 100
093-628033	EVO	Lite	SYM	700/55-34	TRS	864	N/A	DC	32	32	432	5 950
093-658032	EVO	Lite	SYM	700/70-34	TRS	865	N/A	DC	28	28	435	6 470
093-658033	EVO	Lite	SYM	700/70-34	TRS	865	N/A	DC	28	28	433	6 470
093-628031	EVO	Lite	SYM	710/55-34	FR, TRS2+	864	N/A	DC	22	22	440	5 950
093-628036	EVO	Lite	SYM	710/55-34	T422	865	N/A	DC	13	13	450	5 950
093-658031	EVO	Lite	SYM	710/70-34	FR, TRS2+	865	N/A	DC	23	23	440	6 340
093-658034	EVO	Lite	SYM	710/70-34	FR, TRS2+	865	N/A	DC	23	23	433	7 250
093-658036	EVO	Lite	SYM	750-34	T422	865	N/A	DC	28	28	433	7 320

EX



OF




EVO




ECO



Baltic



KovaX



NARROW CROSS MEMBER



STANDARD CROSS MEMBER



SOFT CROSS MEMBER



CTL WHEEL TRACK 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
ECO Narrow												
093-625005	ECO	Narrow	SYM	600-34	FR, TRS2+	774	N/A	DC	0	0	355	6 650
093-653022	ECO	Narrow	SYM	650-26.5	TRS, ELS, A343, A344	670	N/A	DC	0	0	375	6 590
093-628026	ECO	Narrow	SYM	710/55-34	T422	810	N/A	DC	0	0	450	6 650
093-658039	ECO	Narrow	SYM	710/70-34	FR, TRS2+	790	N/A	DC	0	0	440	8 140
093-644023	ECO	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, TiHF, TiFF, FsB	765	N/A	DC	0	0	425	5 900
ECO Standard												
093-658050	ECO	Standard	SYM	700/70-34	FR	850	N/A	DC	15	15	440	8 610
093-658045	ECO	Standard	SYM	700/70-34	TRS	850	N/A	DC	20	20	435	8 150
093-628037DB	ECO	Standard	SYM	710/55-34	FR, TRS2+	850	N/A	DC	15	15	440	7 460
093-644021	ECO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, TiHF, TiFF, FsB	859	N/A	DC	35	35	430	8 100
ECO Soft												
093-628039	ECO	Soft	SYM	710/55-34	FR, TRS2+	916	N/A	DC	53	53	458	8 150
ECO Wide												
093-628032DB	ECO	Wide	SYM	710/55-34	FR, TRS2+	943	N/A	DC	15	15	410	9 260
ECO L												
093-628021	ECO	Lite	SYM	700/55-34	TRS	916	N/A	DC	58	58	458	9 400
KovaX Standard												
093-628056	KovaX	Standard	SYM	710/55-34	FR, TRS2+	850	N/A	DC	15	15	425	7 370
093-658029	KovaX	Standard	SYM	710/70-34	FR, TRS2+	850	N/A	DC	15	15	425	8 400
KovaX Soft												
093-628049	KovaX	Soft	OSS	710/55-34	FR, TRS2+	905	N/A	DC	20	65	430	7 150
093-628046	KovaX	Soft	OSS	710/55-34	T422	875	N/A	DC	0	55	420	6 160
093-628045	KovaX	Soft	OSS	710/55-34	FR, TRS2+	875	N/A	DC	0	65	410	6 160
093-658047	KovaX	Soft	OSS	710/70-34	FR, TRS2+	905	N/A	DC	20	65	430	8 770
Combination OF-Baltic Soft												
093-658026	OF-Baltic	Soft	SYM	700/70-34	TRS	850/770	N/A	DC	25	25	425	8 660
Baltic Narrow												
093-628042	Baltic	Narrow	SYM	710/55-34	T422	830	N/A	DC	0	0	445	8 100
Baltic Standard												
093-654024	Baltic	Standard	SYM	750-26.5	FKF, TRS, A343, A344	815	N/A	DC	8	8	430	7 640

CTL WHEEL TRACK 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
Baltic Soft												
093-625004	Baltic	Soft	OSS	600-34	FR, TRS2+	800	N/A	DC	0	101	355	6 850
093-653023	Baltic	Soft	OSS	650-26.5	TRS, ELS, A343, A344	800	N/A	DC	9	101	374	6 160
093-628038VB	Baltic	Soft	OSS	700/55-34	TRS	1000	N/A	RC	0	200	425	10 130
093-628022OB	Baltic	Soft	OSS	700/55-34	TRS	925	N/A	NC	17	108	420	9 040
093-628020	Baltic	Soft	SYM	700/55-34	TRS	913	N/A	DC	57	57	457	9 040
093-628022	Baltic	Soft	OSS	700/55-34	TRS	925	N/A	DC	17	108	420	9 040
093-628038	Baltic	Soft	OSS	700/55-34	TRS	1000	N/A	DC	0	200	425	9 770
093-658025	Baltic	Soft	OSS	700/70-34	TRS	925	N/A	DC	17	108	417	9 300
093-628041	Baltic	Soft	OSS	710/55-34	FR, TRS2+	1000	N/A	DC	0	200	425	9 260
093-628034	Baltic	Soft	OSS	710/55-34	T422	925	N/A	DC	10	85	435	9 150
093-628024	Baltic	Soft	OSS	710/55-34	T422	925	N/A	DC	8	87	435	9 300
093-628030	Baltic	Soft	OSS	710/55-34	FR, TRS2+	925	N/A	DC	12	103	425	9 180
093-628035	Baltic	Soft	ASYM	710/55-34	FR, TRS2+	1060	N/A	DC	50	200	455	10 090
093-628029	Baltic	Soft	SYM	710/55-34	FR, TRS2+	913	N/A	DC	52	52	457	9 180
093-628053	Baltic	Soft	SYM	710/55-34	FR, TRS2+	1015	N/A	DC	103	103	508	9 690
093-644024	Baltic	Soft	ASYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, TiHF, TiFF, FsB	920	N/A	DC	20	103	417	7 310
093-644022	Baltic	Soft	OSS	710-26.5	TRS, TRS2, T440, A344, TiFG	925	N/A	DC	12	103	417	7 330
093-654030	Baltic	Soft	ASYM	750-26.5	FKF, TRS, A343, A344	1060	N/A	DC	60	210	455	9 450
093-663001	Baltic	Soft	OSS	750-26.5	TRS2 Only	1035	N/A	DC	10	185	430	10 650
093-654022OB	Baltic	Soft	OSS	750-26.5	FKF, TRS, A343, A344	925	N/A	NC	22	113	417	9 040
093-654022	Baltic	Soft	OSS	750-26.5	FKF, TRS, A343, A344	925	N/A	DC	22	113	417	9 040
093-663000	Baltic	Soft	OSS	750-26.5	TRS2, T480	925	N/A	DC	0	94	440	9 040
093-663000	Baltic	Soft	OSS	780-26.5	FKF	925	N/A	DC	0	94	440	9 040

CTL WHEEL TRACK 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
EVO Narrow												
293-658030DB	EVO	Narrow	SYM	710/70-34	FR, TRS2+	800	N/A	DC	0	0	410	7 960
Combination EVO-Baltic Narrow												
293-658029DB	EVO-Baltic	Narrow	SYM	710/70-34	FR, TRS2+	775/770	N/A	DC	0	0	425	8 100
293-658026DB	EVO-Baltic	Narrow	SYM	710/70-34	FR, TRS2+	775	N/A	DC	0	0	425	8 020
293-628021DB	EVO-Baltic	Narrow	SYM	710/55-34	FR, TRS2+	775/770	N/A	DC	0	0	425	7 120
293-658026	EVO-Baltic	Narrow	SYM	710/70-34	FR, TRS2+	775	N/A	SC	0	0	425	7 640
Combination EVO-Baltic Standard												
293-658028DB	EVO-Baltic	Standard	SYM	710/70-34	FR, TRS2+	840	N/A	DC	10	10	440	8 100
KovaX Soft												
293-654025	KovaX	Soft	OSS	750-26.5	FKF, TRS, A343, A344	875	N/A	DC	10	65	410	6 280
Baltic Soft												
293-654022	Baltic	Soft	OSS	750-26.5	FKF, TRS, A343, A344	925	N/A	DC	22	105	420	9 150



Skidder Wheel Tracks™



SKIDDER WHEEL TRACK 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
ECO Standard												
193-660020	ECO	Standard	SYM	35.5-32	TRS, LK, Firestone	1012	N/A	DC	3	3	583	8 100


SKIDDER WHEEL TRACK 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	EUR
OF Standard												
293-654020	OF	Standard	SYM	750-26.5	FKF, TRS, A343, A344	890	N/A	DC	18	18	458	7 470
ECO Standard												
293-626040	ECO	Standard	SYM	24.5-32	Firestone	840	N/A	DC	15	15	435	6 850
293-628020	ECO	Standard	SYM	28L-26	TRS, LK, Firestone	966	N/A	DC	5	5	485	6 540
293-627020	ECO	Standard	SYM	30.5-32	LK, Firestone	966	N/A	DC	8	8	505	7 680
293-660020	ECO	Standard	SYM	35.5-32	TRS, LK, Firestone	1112	N/A	DC	11	11	575	8 850



PRO-GRIP™

U-TS™

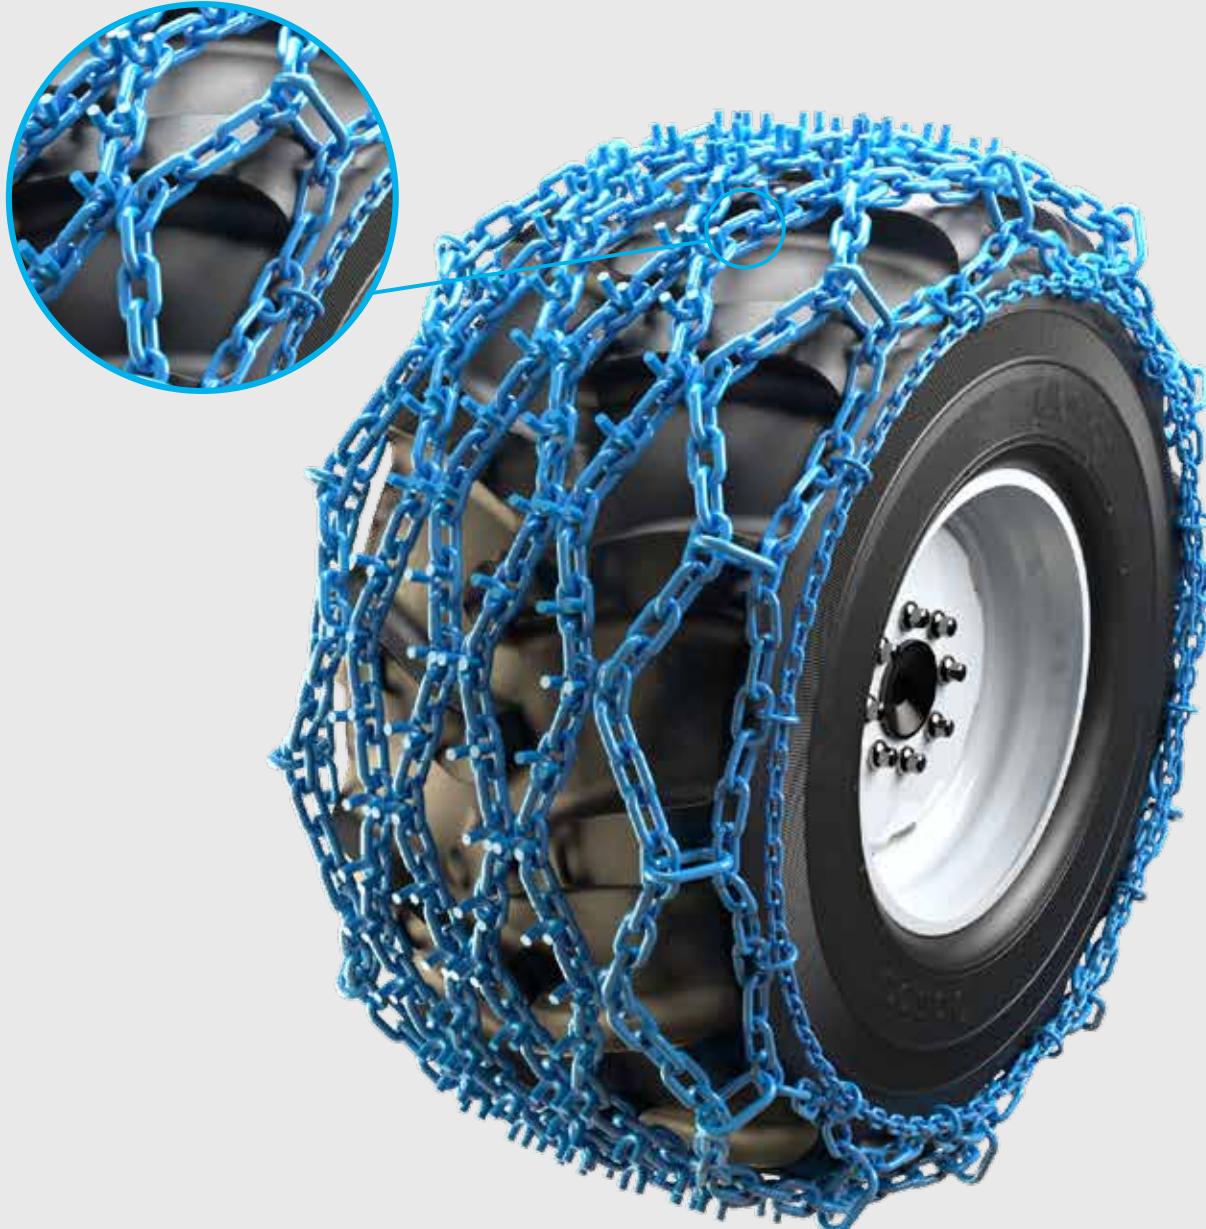

PRO-GRIP U-TS


Tire size	Extra info	Tire model/No	Link system	Version	Stud	Part number	EUR
23,1-26	tightening rail		16 mm	Chain	19 mm	716-631020	3 020
23,1-26	tightening rail	TRS, FIRESTONE	16 mm	Chain	19 mm	716-621345	2 800
24,5-32/21,3-34		A345	16 mm	Chain	19 mm	716-626040	3 270
30,5-32		LK, FIRESTONE	16 mm	Chain	19 mm	716-627020	3 350
30,5-32			19 mm	Chain	19 mm	719-627020	4 910
600-22,5	tightening rail	TRS, TRS2, ELS, A331, A343, A344	13 mm	Chain	16 mm	713-640020	1 840
600/65-34		A342, A343, A344, T428	13 mm	Chain	16 mm	713-625020	2 360
600/65-34		FKF	16 mm	Chain	19 mm	716-625020	3 680
650-24,5		FR, A342, A343, A344	13 mm	Chain	16 mm	713-662020	1 870
650-26,5		ELS	16 mm	Chain	19 mm	716-653020	3 080
710-22,5		FKF, TRS, ELS2, A331, A343, A344	16 mm	Chain	19 mm	716-652045	2 600
710-22,5	tightening rail	ELS, FKF, FKF2	13 mm	Chain	16 mm	713-652020	1 880
710-26,5	tightening rail	FKF, FKF2, TRS2	19 mm	Chain	19 mm	719-644020	4 310
710-26,5	tightening rail	FKF, FKF2, TRS2, T422	16 mm	Chain	19 mm	716-644020	3 190
700/55-34	tightening rail	TRS2, A346	16 mm	Chain	19 mm	716-628020	3 890
700/55-34	tightening rail	TRS2, A346	13 mm	Chain	16 mm	713-628020	2 660
700/70-34	tightening rail	TRS, FR, TRS2+	13 mm	Chain	16 mm	713-658020	2 960
700/70-34	tightening rail	TRS, FR, TRS2+	16 mm	Chain	19 mm	716-658020	4 110
710-22,5		FKF, FKF2	13 mm	Chain	16 mm	713-652030	2 540
710-24,5	tightening rail	TRS2, A346, FKF2, T428	16 mm	Chain	19 mm	716-661020	2 820
710-24,5		TRS2, T428, T440, T480, A344	13 mm	Chain	16 mm	713-661000	2 080
710-26,5	tightening rail	T422	19 mm	Chain	19 mm	719-644422	4 310
710-26,5	tightening rail	FKF, FKF2, T428, T480, A342	13 mm	Chain	16 mm	713-644020	2 400
710-28,5		FKF	16 mm	Chain	19 mm	716-680020	4 120
710/55-34	tightening rail	T422, FR, TRS2+	16 mm	Chain	19 mm	716-628422	4 130
750-26,5	tightening rail	TRS2, A346, T422, FR, TRS2+	19 mm	Chain	19 mm	719-658422	5 410
750-26,5	tightening rail	FKF2, TRS2, A331, A342, A343, A344	16 mm	Chain	19 mm	716-654020	3 570
750-26,5	tightening rail	FKF2, TRS2, A331, A342, A343, A344	19 mm	Chain	19 mm	719-654020	4 250
780-28,5		FKF	16 mm	Chain	19 mm	716-673000	3 980
800-26,5		FKF, FKF2	13 mm	Chain	16 mm	713-656020	2 360
800-26,5		FKF	16 mm	Chain	19 mm	716-656020	3 020

PRO-GRIP U

Tire size	Extra info	Tire model/No	Link system	Version	Stud	Part number	EUR
600-26,5		FKF2, TRS2, A331, A342, A343, A344	13 mm	Chain	16 mm	713-624020	2 330
600-26,5		FKF, TRS2, A331, A342, A343, A344	16 mm	Chain	19 mm	716-624020	2 870
35,5-32			19 mm	Chain	19 mm	719-660020	6 180

PRO-GRIP™

F™

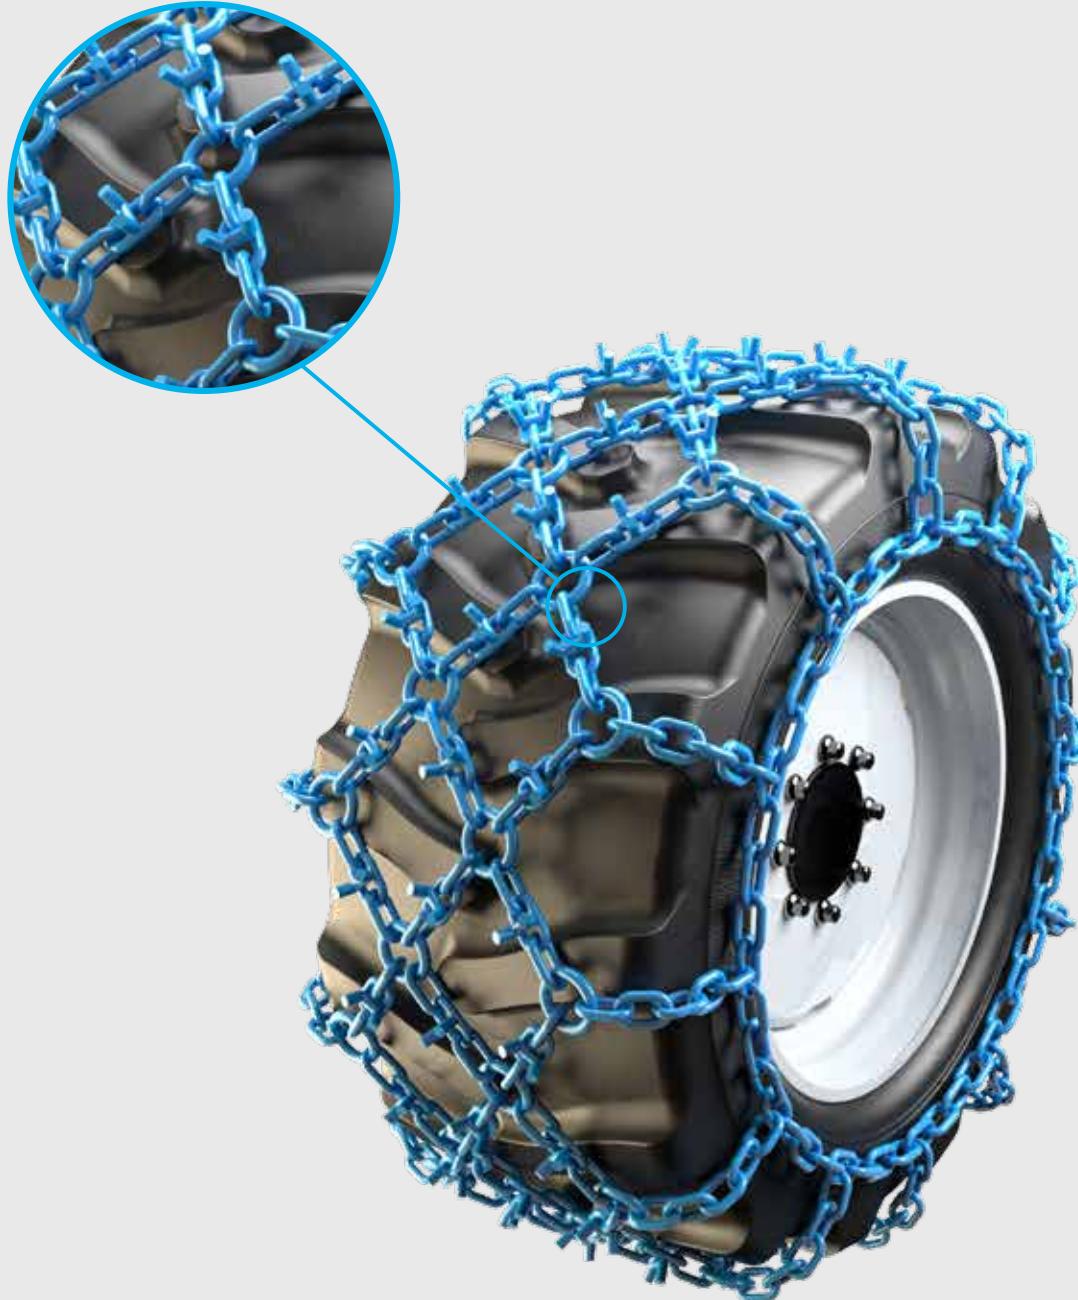


PRO-GRIP F

Tire size	Extra info	Tire model/No	Link system	Version	Stud	Part number	EUR
30,5-32			19 mm	Chain	19 mm	717-627020	4 760
35,5-32			19 mm	Chain	19 mm	717-660020	5 700
600-26,5	tightening rail	FKF2, TRS2, A331, A342, A343, A344	16 mm	Chain	19 mm	717-624020	2 420
600/65-34		FKF	16 mm	Chain	19 mm	717-625020	2 650
710-22,5	tightening rail	ELS, FKF	16 mm	Chain	19 mm	717-652040	1 880
710-26,5	tightening rail	FKF, FKF2, TRS2, T422	16 mm	Chain	19 mm	717-644020	2 430
700/70-34		TRS, FR, TRS2+	16 mm	Chain	19 mm	717-658020	3 200
700/55-34		TRS2, A346, T422, FR, TRS2+	16 mm	Chain	19 mm	717-628020	2 720
710-24,5	tightening rail	TRS2, A346	16 mm	Chain	19 mm	717-661020	2 240
710-28,5			16 mm	Chain	19 mm	717-680020	2 600
710/55-34		TRS2, A346, T422, FR, TRS2+	16 mm	Chain	19 mm	717-628422	2 740
750/45-30,5	tightening rail		16 mm	Chain	19 mm	717-654060	2 750
750-26,5	tightening rail	FKF2, TRS2, A331, A342, A343, A344	16 mm	Chain	19 mm	717-654020	2 750
750/65-34		FKF, FKF2, TRS2, T422	16 mm	Chain	19 mm	717-683020	3 370
780-28,5	tightening rail	FKF	16 mm	Chain	19 mm	717-663000	2 920

PRO-GRIP™

SF™

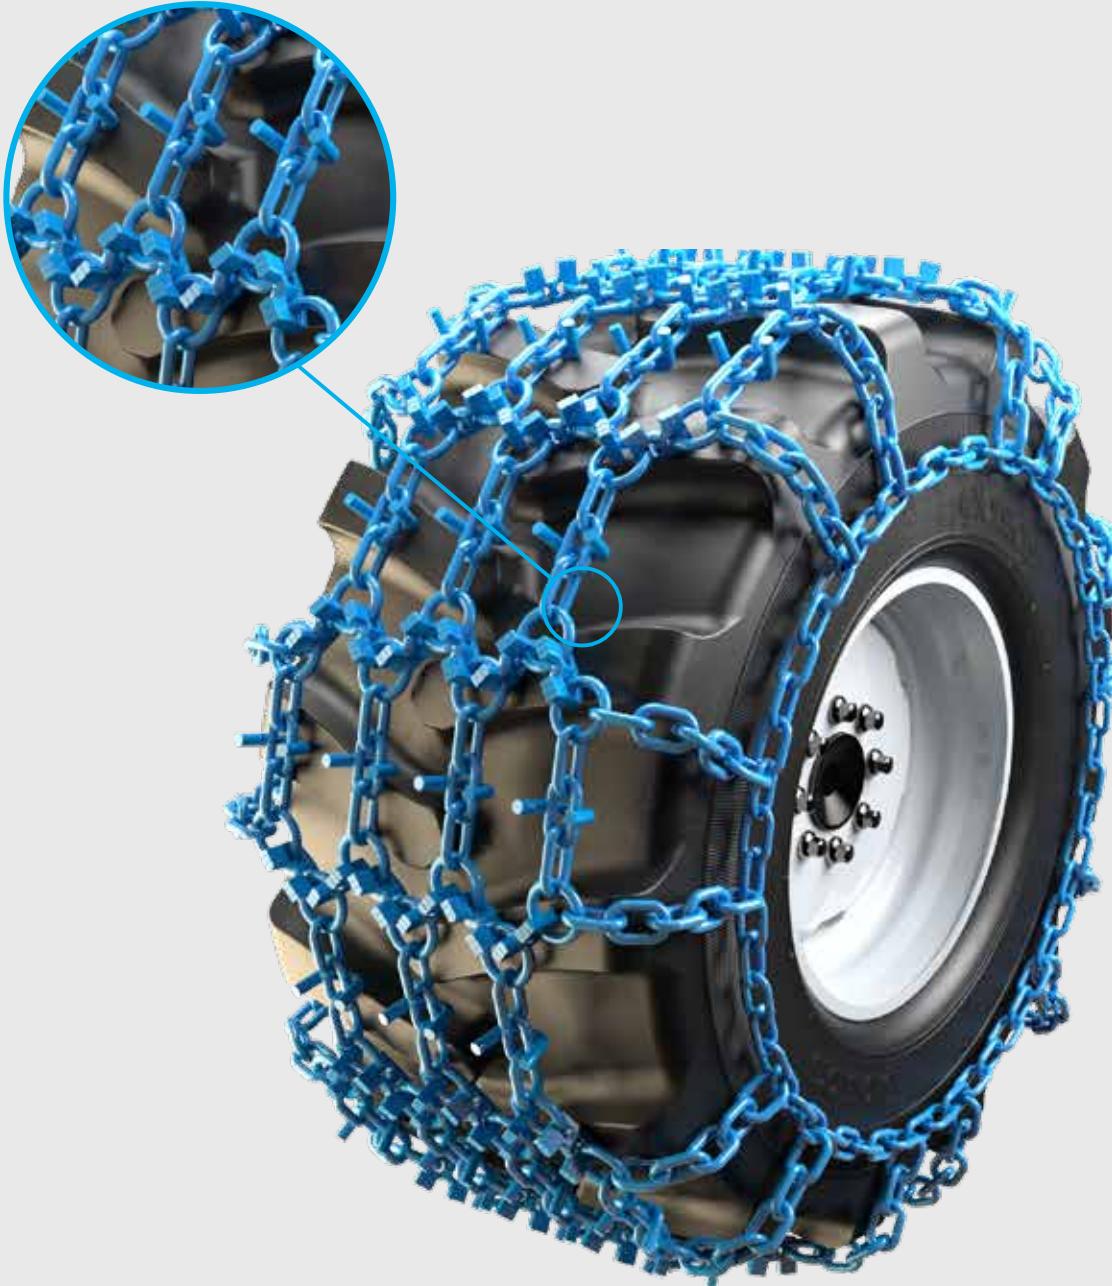


PRO-GRIP SF

Tire size	Extra info	Tire model/No	Link system	Version	Stud	Part number	EUR
600-26,5		FKF2, TRS2, A331, A342, A343, A344	16 mm	Chain	19 mm	711-624020	3 420
700/70-34	TRS		16 mm	Chain	19 mm	711-658020	4 360
710-24,5		FKF, FKF2, A343	16 mm	Chain	19 mm	711-661020	3 690
710-26,5	FKF, FKF2, TRS2, T422		16 mm	Chain	19 mm	711-644020	3 760
710/55-34	TRS2, A346, T422, FR		16 mm	Chain	19 mm	711-628422	4 560
710/70-34	TRS		16 mm	Chain	19 mm	711-684020	4 360
750-26,5	FKF2, TRS2, A331, A342, A343, A344		16 mm	Chain	19 mm	711-663020	4 400
780-28,5	FKF		16 mm	Chain	19 mm	711-673020	4 470
800-26,5	FKF		16 mm	Chain	19 mm	711-668020	4 330

PRO-GRIP™

G™

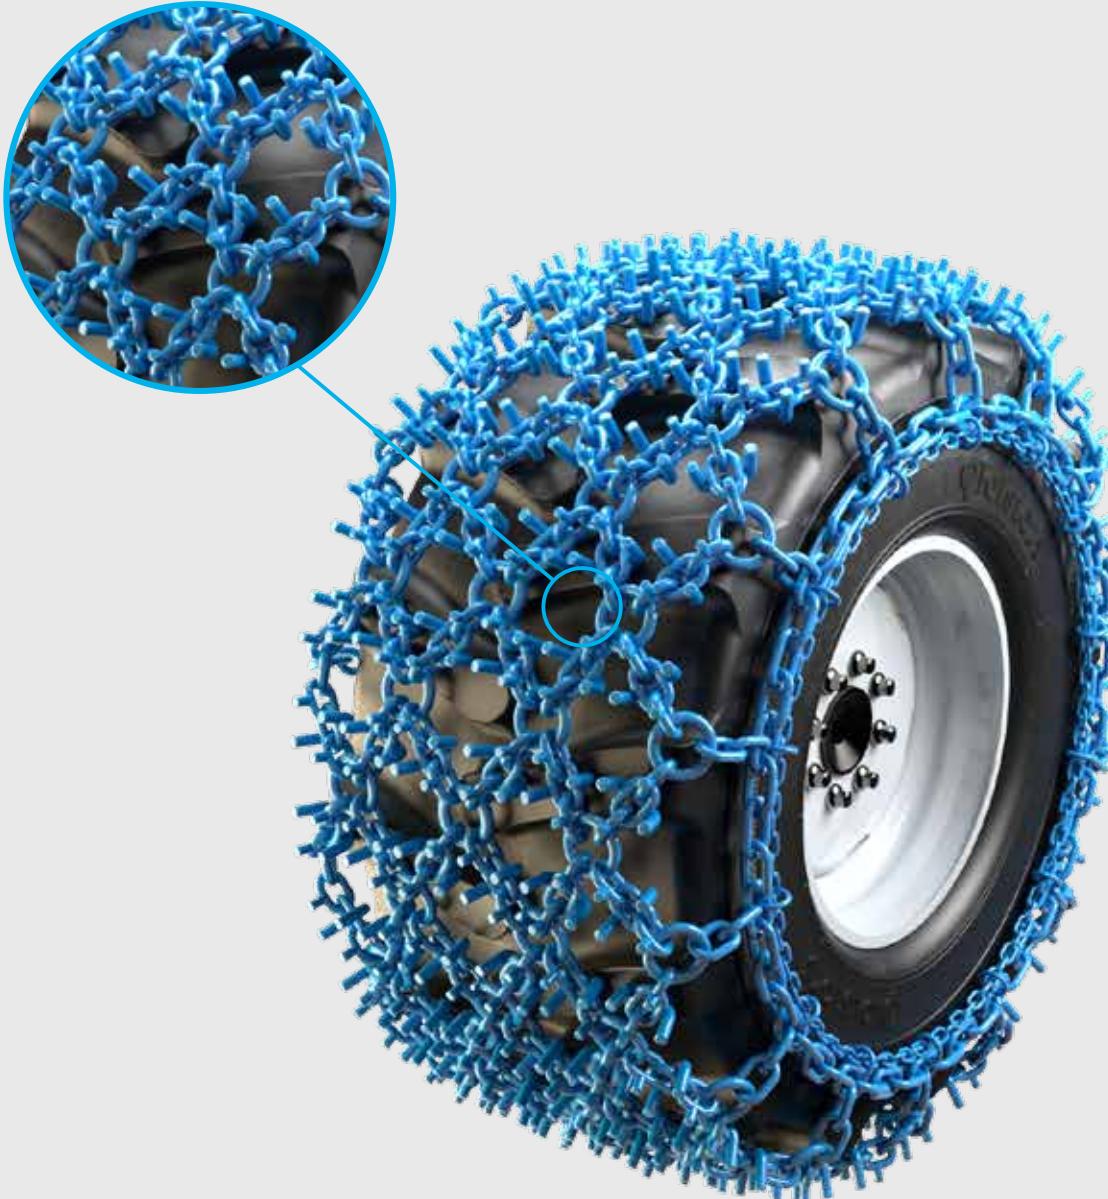


PRO-GRIP G

Tire size	Extra info	Tire model/No	Link system	Version	Stud	Part number	EUR
600-26,5		FKF2, TRS2, A331, A342, A343, A344	16 mm	Chain	19 mm	720-624020	3 420
700/70-34		TRS, FR, TRS2+	16 mm	Chain	19 mm	720-658020	5 160
710-26,5		FKF, FKF2, TRS2, T422	16 mm	Chain	19 mm	720-644020	3 760
710/55-34		TRS2, A346, T422, FR, TRS2+	16 mm	Chain	19 mm	720-628422	4 560
710/70-34		TRS	16 mm	Chain	19 mm	720-658021	5 650
750-26,5		FKF2, TRS2, A331, A342, A343, A344	16 mm	Chain	19 mm	720-654020	4 400
780-28,5		FKF	16 mm	Chain	19 mm	720-673020	4 470
800-26,5		FKF	16 mm	Chain	19 mm	720-656020	4 330

PRO-GRIP™

RC™

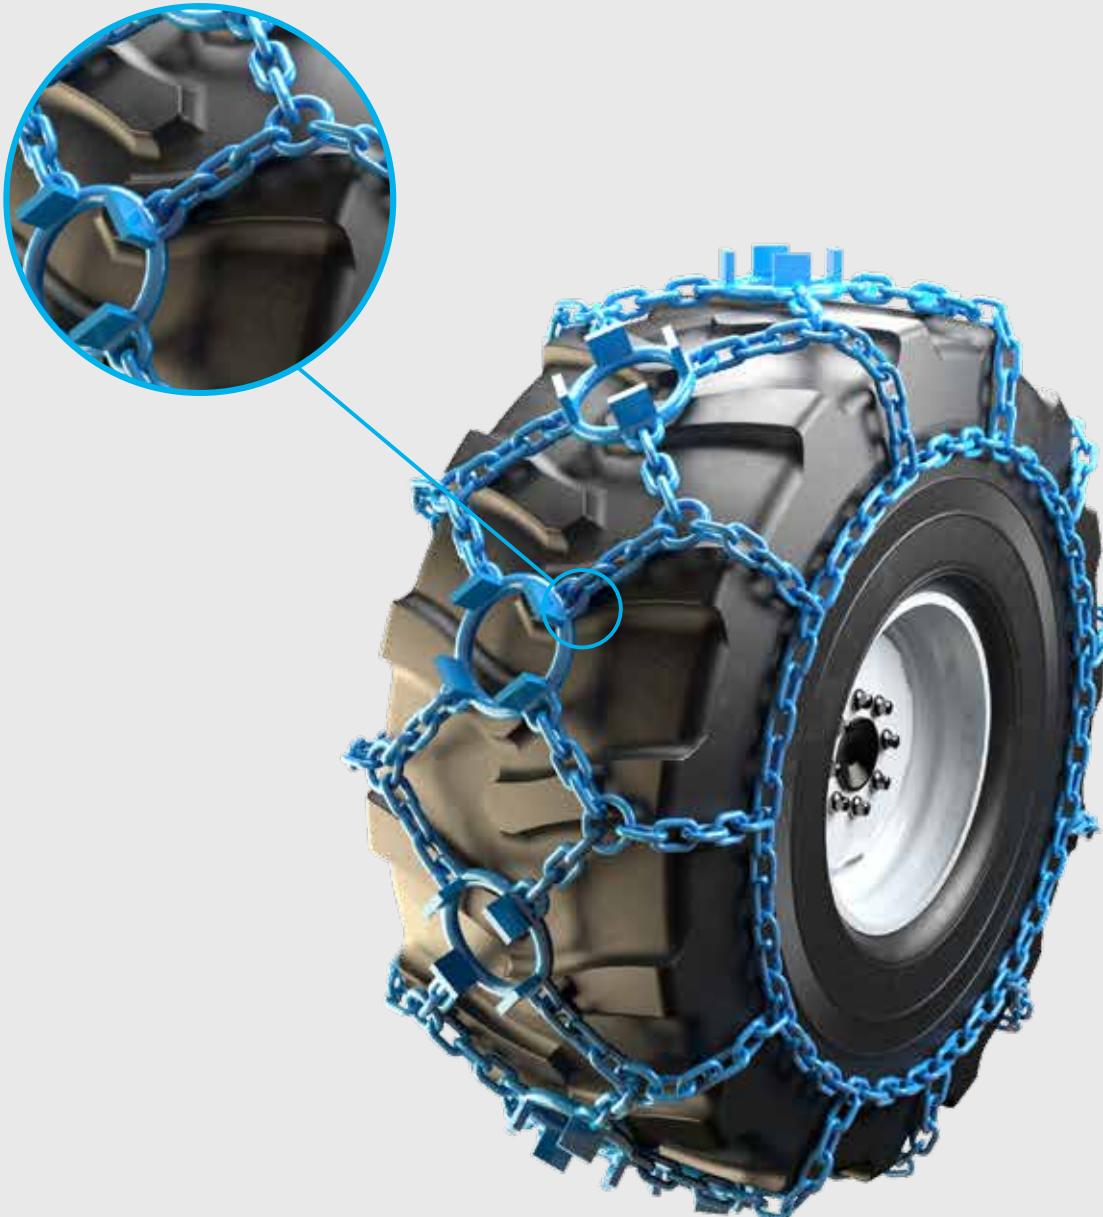


PRO-GRIP RC

Tire size	Link system	Cleat	Track type	Part number	EUR
23,1-26	16 mm	30	Chain	723-631020	2 090
24,5-32	16 mm	30	Chain	723-626020	2 850
24,5-32	19 mm	32	Chain	723-626021	4 390
30,5-32	16 mm	30	Chain	723-627020	3 070
30,5-32	19 mm	32	Chain	723-627022	4 570
30,5-32	22 mm	32	Chain	723-627021	5 250

Parts

PARTS FOR CHAINS

Description	Part no.	Pict no.	EUR
Tightening Chain 26,5 rims	616-624333		125
Wheel Chain Attachment 22,5 (Pair)	635-225000	1	315
Wheel Chain Attachment 24,5 (Pair)	635-245000	1	325,50
Wheel Chain Attachment 26,5 (Pair)	635-265000	1	336
Wheel Chain Attachment 28,5 (Pair)	635-285000	1	357
Mounting tool Chain	635-475040	2	273
Pin connector tool (For 13 - 22 mm pin)	635-475032	3	31,50
Coupling no. 13 - 16 mm	953-530296	4	10,50
Coupling no. 16 - 19 mm	953-530297	5	15,80
Coupling no. 19 - 22 mm	953-530298	6	21
Schackle no. 13	953-530341	7	2,60
Schackle no. 16	953-530345	8	4,70

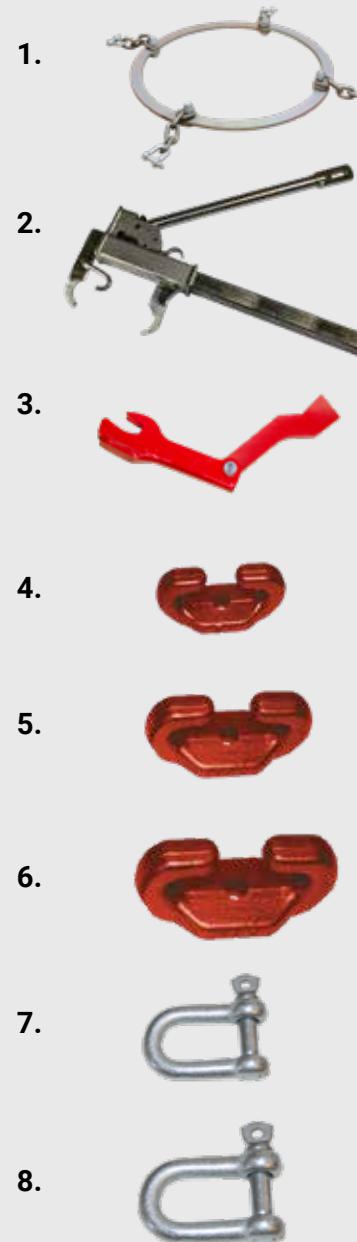

PARTS FOR TRACKS

Description	Part no.	Pict no.	EUR
Track Lock 22x90	022-357300	1	44,10
Track Lock 22x135	022-357310	2	47,30
Track Lock 22x185	022-357320	3	50,40
Track Lock 26x105	025-486845	4	46,20
Track Lock 26x155	025-486855	5	50,40
Track Lock 26x205	025-486865	6	55,70
Track Lock 28x125	030-361700	7	59,90
Track Lock 28x175	030-361710	8	70,40
Track Lock 28x225	030-361720	9	92,40
Track Lock Extension Ø 22 mm 100x50x40	022-483170	10	18,90
Track Lock Extension Ø 26 mm 120x50x45	025-483175	10	23,10
Cleat 45x20 H=27	017-462750	11	1,80
Cleat 45x15 H=30	018-451510	11	1,60
Cleat 50x30 H=63	022-415710	11	3,70
Cleat 45x20 H=35	022-415720	11	2,00
Cleat 65x60 H=27	022-483156	13	6,30
Cleat 50x30 H=35	022-488200	11	3,00
Cleat 50x30 H=50	022-488205	11	3,20
Cleat 45x20 H=45	025-479630	11	2,80
Cleat 45x20 H=30 weld on cleat	022-415725	12	3,70
Cleat 50x30 H=35 weld on cleat	022-488215	12	3,70
Kit			
Kit 80 pcs Cleat 50x30 H=63	037-415710	11	294,00
Kit 80 pcs Cleat 45x20 H=35	037-415720	11	159,60
Kit 80 pcs Cleat 45x15 H=30	037-451510	11	126,00
Kit 80 pcs Cleat 45x20 H=27	037-462750	11	142,80
Kit 80 pcs Cleat 45x20 H=45	037-479630	11	226,80
Kit 80 pcs Cleat 50x30 H=35	037-488200	11	243,60
Kit 80 pcs Cleat 50x30 H=50	037-488205	11	252,00
Kit 80 pcs Cleat 45x20 H=30 weld on	037-415725	12	294,00
Kit 80 pcs Cleat 50x30 H=35 weld on	037-488215	12	294,00

RECOMMENDED CLEATS TO TRACK TYPES


Description	Part no.	
ECO, EX	022-415720	11
ECO, EX, 30 mm link system	022-483156	13
OF	022-488200	11
EVO, KovaX, Baltic, CoverX, PRO	022-488205	11



Parts

PARTS FOR TRACKS

Description	Part no.	Pict no.	EUR
Chain (Pair)	035-310651	1	96,60
Skidder Wheel Track	035-481970	2	150,20
CTL Wheel Track	036-495100	3	833,70
ECO	036-468510	4	441,00
OF	036-468511	5	441,00
U	036-468513	6	441,00
Baltic	036-468514	7	441,00
EVO	036-468518	8	441,00
EX	036-490740	9	441,00
KovaX	036-468250	10	441,00
CoverX	036-468260	11	441,00
CoverX M	036-468270	12	488,30
Spare U clamp (price per each)	035-470130	13	14,70

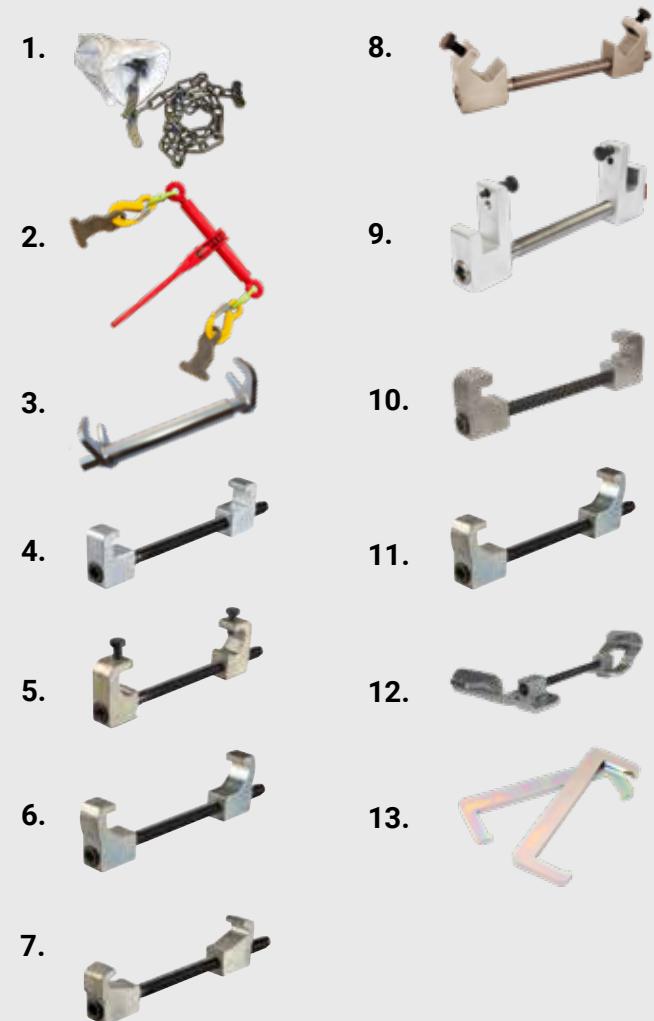

PARTS FOR TRACKS


Description	Part no.	Pict no.	EUR
Base unit with casing. Note: Excluding jaws	035-489400	13	924,00
ECO	035-489410	14	220,50
OF	035-489420	15	252,00
Baltic	035-489430	16	220,50
U	035-489440	17	220,50
EVO	035-489470	18	252,00
EX	035-489480	19	262,50
KovaX	035-489450	20	252,00
CoverX	035-489520	21	252,00
Extensioner for tool	035-489398		46,20

Note: Max input torque 14 nm

13.



14.



15.



16.



17.



18.



19.



20.




21.





Parts

PARTS FOR TRACKS

Description	Part no.	Pict no.	EUR
Base unit. Note: Excluding jaws	035-489405	1	441,00
ECO	035-489415	2	220,50
OF	035-489425	3	252,00
Baltic	035-489435	4	220,50
U	035-489445	5	220,50
EVO	035-489475	6	252,00
EX	035-489485	7	262,50
KovaX	035-489455	8	252,00
CoverX	035-489525	9	252,00

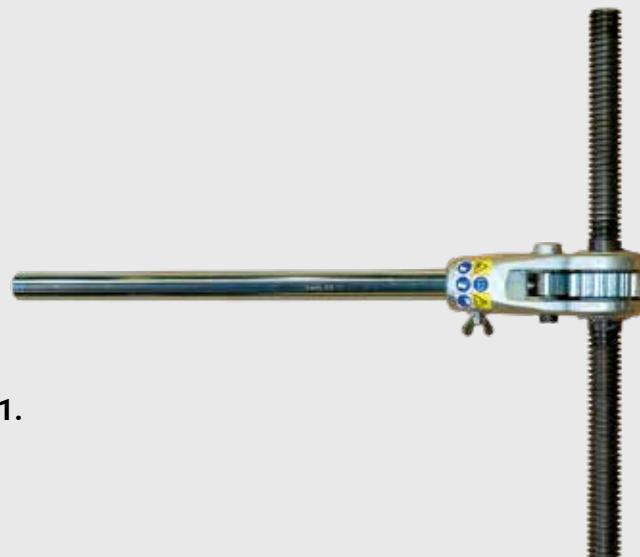

1.

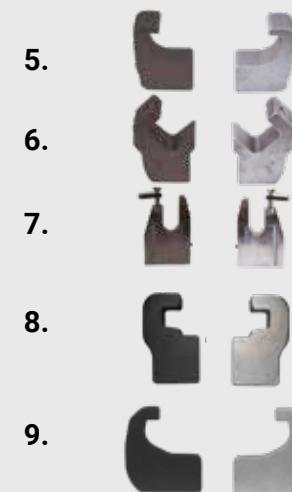

Note: Left jaw is black



Links & Link hooks

Side support



22, 26 & 29 mm

A



30 mm

B



Max

C



Degree angle 35°



Degree angle 17°



Link



Link hook

22 MM LINK SYSTEM

Description	Part no.	Picture	*Side support	EUR
Side support	017-253004	A	35	14,70
Link hook	022-450138			12,60
Link	022-462545			13,70
Link hook	022-450136			12,60
Link	022-415390			13,70
Side support	017-253007	A	17	10,40
Link hook	022-450138			12,60
Link	022-462545			13,70
Link hook	022-450136			12,60
Link	022-415390			13,70
Side support	017-253014	A	35	18,90
Link hook	022-450138			12,60
Link	022-462545			13,70
Side support	017-253017	A	17	14,00
Link hook	022-450138			12,60
Link	022-462545			13,70

26 mm Link system

Description	Part no.	Picture	*Side support	EUR
Side support	017-253004	A	35	14,70
Link hook	025-356088			18,90
Link	025-469000			15,80
Side support	017-253014	A	35	18,90
Link hook	025-356088			18,90
Link	025-469000			15,80
Side support	017-253007	A	17	10,40
Link hook	025-356088			18,90
Link	025-469000			15,80
Side support	017-253017	A	17	14,00
Link hook	025-356088			18,90
Link	025-469000			15,80

29 MM LINK SYSTEM

Description	Part no.	Picture	*Side support	EUR
Side support	017-253007	A	17	10,40
Link hook	029-200100			22,40
Link	029-200000			18,90
Side support	017-253014	A	35	18,90
Link hook	029-200101			21,00
Link	029-200000			18,90
Side support	017-253017	A	17	14,00
Link hook	029-200100			22,40
Link	029-200000			18,90

30 MM LINK SYSTEM

Description	Part no.	Picture	*Side support	EUR
Side support	025-253775	B	35	30,00
Link hook	030-360720			30,00
Link	030-360730			24,20

MAX LINK SYSTEM

Description	Part no.	Picture	*Side support	EUR
Side support	025-253785	B	35	23,10
Link hook	025-477047			13,00
Link	025-469000			15,80
Side support	025-253800	C	35	26,30
Link hook	025-477050			13,70
Link	025-469000			15,80

Contacts

Customer Service

Olofsfors AB

Address: Olofsfors 11
SE-914 91 Nordmaling
Sweden
Phone: +46 930-311 40
E-mail: order@olofsfors.se
Opening hours:
Monday-thursday 07:30-16:00 Local time
Friday 07:30-15:00 Local time
Lunch hour 12:00-13:00 Local time

Olofsfors Inc

Address: 121 Roy Blvd., Unit 4
Brantford, Ontario, Canada
N3R 7K1
Phone: +1 519 754 2190
Fax: +1 519 757 1100
E-mail: info@olofsfors.com
Opening hours:
Mon-Fri 8am-5pm EST

Olofsfors GmbH

Address: Auf der Röte 1
DE-75397 Simmozheim
Germany
Phone: +49 (0) 7033 32043 10
E-mail: order.gmbh@olofsfors.de
Opening hours:
Mon-Fri 8am-5pm EST

Olofsfors South America

Address:
Phone: +55 11 97373 0201
E-mail: alex.lambert@olofsfors.com
Opening hours:
Mon-Fri 8am-5pm EST

Olofsfors LLC

Address: Shpalernaya street 54
K.B 191050 St: Petersburg
Russia
Phone: +7 921 790 33 03
E-mail: info.ru@olofsfors.com
Opening hours:
Monday-thursday 07:30-16:00 Local time

Metsätyö OY Jyväskylä

Address: Kiilatie 5
FI-40320 Jyväskylä
Finland
Phone: +358 14 338 8700
E-mail: info@metsatyo.fi
Opening hours:
Monday-thursday 08:00-17:00 Local time

Metsätyö OY Hämeenlinna

Address: Kiltintie 13
FI-13130 Hämeenlinna
Finland
Phone: +358 3 644 0400
E-mail: info@metsatyo.fi
Opening hours:
Monday-thursday 08:00-17:00 Local time

Metsätyö OY Rovaniemi

Address: Alakorkaltontie 42
FI-96300 Rovaniemi
Finland
Phone: +358 16 321 0100
E-mail: info@metsatyo.fi
Opening hours:
Monday-thursday 08:00-16:00 Local time

Contacts



Director of Sales
Australia, New Zealand

Kjell-Erik Åström

Phone: +46 (0)930 397 10
Mob: +46 (0)70 323 97 10
E-mail: kjell-erik.astrom@olofsfors.se



Regional Sales Manager
Sweden, Norway, Denmark, UK, Ireland, Eastern Europe, Spain, Portugal, South Africa

Jonas Persson

Phone: +46 (0)930 396 18
Mob: +46 (0)70 658 00 99
E-mail: jonas.persson@olofsfors.se



Regional Sales Manager
Sweden, Baltics, Asia, Italy, Czech Republic

Micael Olsson

Phone: +46 (0)930 396 66
Mob: +46 (0)72 400 88 66
E-mail: micael.olsson@olofsfors.se



Regional Sales Manager
Finland

Markku Sivelä

Mob: +358 (0)406 546 023
E-mail: markku.sivela@metsatyo.fi



Regional Sales Manager
Central Europe

Bernd Fuchslocher

Phone: +49 (0)7033 32043 10
Mob: +49 (0)175 187 1355
E-mail: bernd.fuchslocher@olofsfors.de



Regional Sales Manager
France

Marc Sieger

Mob: +49 (0)152 54057138
E-mail: marc.sieger@olofsfors.de



Regional Sales Manager
Forestry products
Russia, Belarus and Ukraine

Anton Busygin

Phone: +7 (0)812 956 5790
E-mail: anton.busygin@olofsfors.com



Regional Sales Representative
South America

Alexandre Lambert

Phone: +55 (0)11 97373 0202
E-mail: alex.lambert@olofsfors.com



Regional Sales Manager
North America, USA

Garet Robinson

Phone: +1 (0)519 754 2179
Mob: +1 5 (0)19 732 4848
E-mail: garet.robinson@olofsfors.com



Regional Sales Representative
Central U.S.

JD Moore

Phone: +1 (0)519 754 2929
Mob: +1 (0)519 802 4668
E-mail: james.moore@olofsfors.com



Regional Sales Representative
Pacific Northwest & Western Canada

D'Arcy Manson

Phone: +1 (0)604 992 6400
E-mail: darcy.manson@olofsfors.com



Regional Sales Representative
Atlantic, Québec, Northeast US

Derek LeBlanc

Mob: +1 (0)506 261-1126
E-mail: derek.leblanc@olofsfors.com

Welding Instructions

THE STRUCTURE OF BORON STEEL

Hardened boron steel has a very high yield point of 1000 – 1200 [MPa] and has a high carbon equivalent, CEIIW (0.55), CET (0.41), which directly affects the risk of cold/hydrogen cracking.

COLD CRACKS

Cold cracks occur in areas adjacent to the welding bead at low temperatures when hydrogen (from moisture, rust and snow) accumulates in areas with high tension and "explodes" the steel, forming small cracks. This means that the piece to be welded must be preheated, and electrodes must be kept as dry and clean as possible. Electrodes from an opened package must be dried in a drying cabinet before use. In addition, the material to be welded must be clean and dry.

Rutile flux-cored wires must not be used since they capture hydrogen.

HOT CRACKS

Hot cracks/solidification cracks are accumulations of an alloying element and contaminants (carbon, sulphur and phosphorus), in the centre of the weld. Welding using a high amperage and a low welding speed can produce this type of cracking.

FATIGUE

Fatigue properties of a joint are improved by a smooth transition between the weld and the base material.

RECOMMENDATIONS

Extensive tests have been carried out at Olofsfors AB and we recommend that you follow the information below and attached weld data sheets for best results. In all cases, welding must only take place after snow, dirt and any rust has been removed from the material.

When welding cleats, the main weld must be along the length of the crossbar; no welding across the crossbar must take place.

Preheat the material according to the WPS. When welding in an environment where moisture can accumulate on the steel, the steel must always be heated first. The welding dimension is a4.

ESAB OK 67.45 is a stainless austenitic filler metal and can be welded without pre-heating if the crossbar is free from snow, dirt, moisture and warmer than the surrounding.


See [WPS111PA02-03](#)

ESAB OK 48.00 is a black filler metal and should be welded with the base material preheated to + 75 [°C] to avoid cold cracks.

See [WPS111PA01-03](#)

ESAB OK Autrod 12.50/12.51 represents the MAG method and must be welded with the base material preheated to about + 50 [°C] to avoid cold cracks.

See [WPS135PA04-03](#)

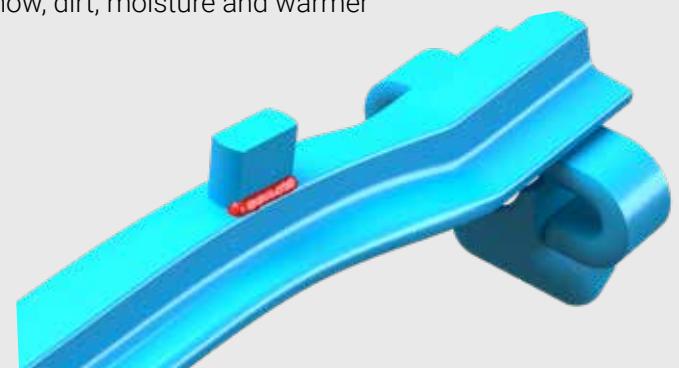

OBS! I det markerade området får inte broddsvetsas.

Note! Don't weld cleat in the marked area.

Huomio! Älä hitsaa telahokkeja punaisella merkattuille alueille!

Hinweis! Schweißplatte nicht im markierten Bereich schweißen.

EX

Rekommenderad brodd, två alternativ
Recommended cleat, two options
Suositeltava telahokki, kaksi vaihtoehtoa
Empfohlen Stacheln, zwei Optionen
Grampo recomendado, duas opções
Taco recomendado (dos opciones)
Taquet recommandé, deux options
Рекомендуемая очистка

Art.nr/Part no/Tuotenro/
Статья: 022-415720 (1)
Art.nr/Part no/Tuotenro/
Статья: 022-483156 (2)




Nota! Não solde grampos na área marcada.

Nota: No suelde tacos en las áreas marcadas.

Note ! Ne pas souder le taquet dans la zone marquée.

Заметка! Не сваривайте шва в отмеченной области.

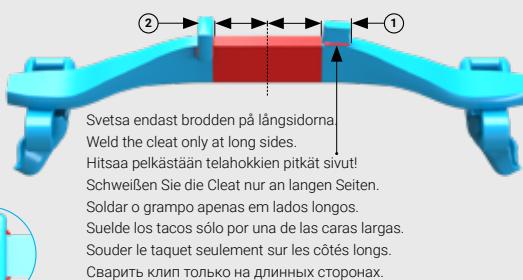

OF


Rekommenderad brodd
Recommended cleat
Suositeltava telahokki
Empfohlen Stacheln
Grampo recomendado
Taco recomendado
Taquet recommandé
Рекомендуемая очистка
Art.nr/Part no/Tuotenro/
Статья: 022-488200



EVO


Rekommenderad brodd
Recommended cleat
Suositeltava telahokki
Empfohlen Stacheln
Grampo recomendado
Taco recomendado
Taquet recommandé
Рекомендуемая очистка
Art.nr/Part no/Tuotenro/
Статья: 022-488205

Lätta band
Light tracks
Keveisiin koneisiin
Leichte Bänder
Lagartas leves
Orugas ligeras
Chenilles légères
Легкие гусеницы
Art.nr/Part no/Tuotenro/
Статья: 022-488200

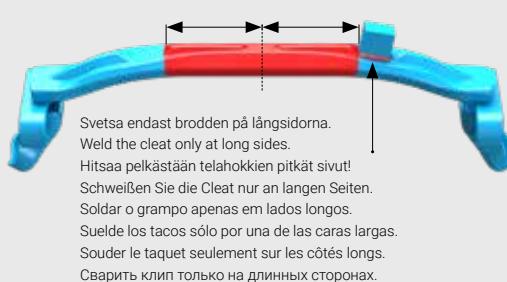

ECO

Rekommenderad brodd
Recommended cleat
Suositeltava telahokki
Empfohlen Stacheln
Grampo recomendado
Taco recomendado
Taquet recommandé
Рекомендуемая очистка
Art.nr/Part no/Tuotenro/
Статья: 022-415720
Art.nr/Part no/Tuotenro/
Статья: 022-483155

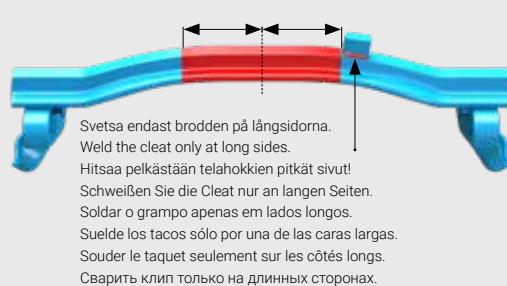

OBS! I det markerade området får inte broddsvetsas.

Note! Don't weld cleat in the marked area.

Huomio! Älä hitsaa telahokkeja punaisella merkattuille alueille!

Hinweis! Schweißplatte nicht im markierten Bereich schweißen.

KOVAX


Rekommenderad brodd
Recommended cleat
Suositeltava telahokki
Empfohlen Stacheln
Grampo recomendado
Taco recomendado
Taquet recommandé
Рекомендуемая очистка
Art.nr/Part no/Tuotenro/
Статья: 022-488205

Nota! Não solde grampos na área marcada.

Nota: No suelde tacos en las áreas marcadas.


Note ! Ne pas souder le taquet dans la zone marquée.

Заметка! Не сваривайте шва в отмеченной области.

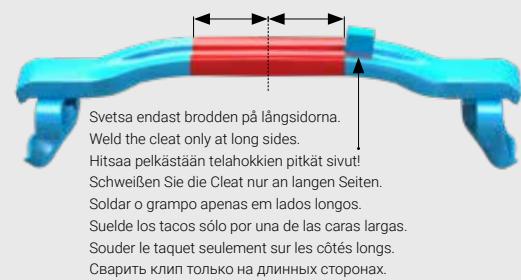


U

Rekommenderad brodd
Recommended cleat
Suositeltava telahokki
Empfohlen Stacheln
Grampo recomendado
Taco recomendado
Taquet recommandé
Рекомендуемая очистка
Art.nr/Part no/Tuotenro/
Статья: 022-415710

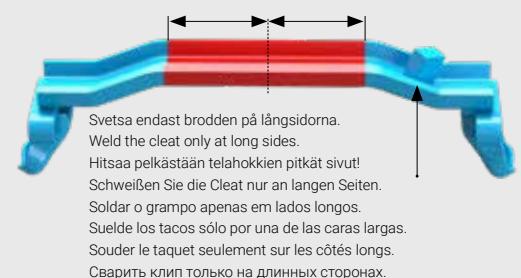


BALTIC

Rekommenderad brodd
Recommended cleat
Suositeltava telahokki
Empfohlen Stacheln
Grampo recomendado
Taco recomendado
Taquet recommandé
Рекомендуемая очистка
Art.nr/Part no/Tuotenro/
Статья: 022-488205

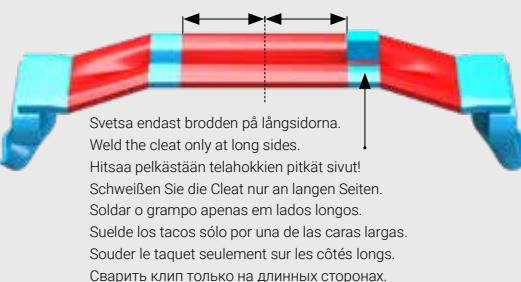

CoverX

Rekommenderad brodd
Recommended cleat
Suositeltava telahokki
Empfohlen Stacheln
Grampo recomendado
Taco recomendado
Taquet recommandé
Рекомендуемая очистка
Art.nr/Part no/Tuotenro/
Статья: 022-488205

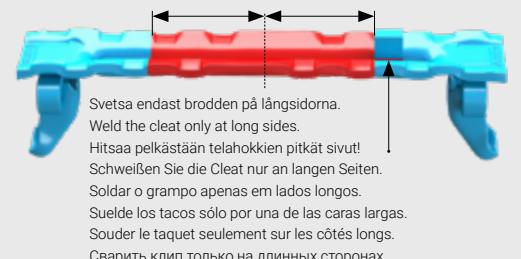




MOUNTING INSTRUCTIONS

PLEASE NOTE!

**ALWAYS USE MAXIMUM TIRE PRESSURE,
RECOMMENDED BY THE TIRE MANUFACTURER**

Tires			
Dimension	Brand	Model	Max.pres.
600/50 x 22.5	Nokian	ELS L-2 (16)	4.3 bar/62 psi
	Nokian	TRS LS-2 (16)	4.3 bar/62 psi
	Trelleborg	T428 143/150	4.0 bar/58 psi
	Trelleborg	T428 149/156	5.0 bar/73 psi
650/45 x 22.5	Trelleborg	T422 150	5.0 bar/73 psi
700/45 x 22.5	Nokian	ELS L-2 (16)	3.9 bar/57 psi
	Nokian	TRS LS-2 (16)	3.9 bar/57 psi
710/40 x 22.5	Nokian	FK F	3.9 bar/57 psi
	Trelleborg	T428 145/152	4.0 bar/58 psi
	Trelleborg	T428 151/158	5.0 bar/73 psi
600/55 x 26.5	Nokian	ELS L-2 (16)	4.6 bar/67 psi
	Nokian	ELS L-2 (20)	5.5 bar/80 psi
	Nokian	TRS LS-2 (16)	4.6 bar/67 psi
	Nokian	FK F (16)	4.6 bar/67 psi
	Nokian	FK F (20)	5.5 bar/80 psi
	Trelleborg	T428 160/167	6.0 bar/87 psi
	Trelleborg	T422 154/161	5.0 bar/73 psi
	Firestone	Forestry EL	3.9 bar/56 psi
	Nokian	TRS 2 (20)	5.5 bar/80 psi
	Trelleborg	T440	6.0 bar/87 psi
620/55 x 30.5	Trelleborg	T428 158/165	5.0 bar/73 psi
	Nokian	ELS L-2	5.5 bar/80 psi
650/65 x 26.5	Trelleborg	T428 161/168	5.0 bar/73 psi
700/50 x 26.5	Nokian	ELS L-2 (16)	4.6 bar/67 psi
	Nokian	ELS L-2 (20)	5.5 bar/80 psi
	Nokian	TRS LS-2 (16)	4.6 bar/67 psi
	Nokian	TRS LS-2 (20)	5.5 bar/80 psi
	Trelleborg	T423	5.0 bar/73 psi
	Firestone	Forestry EL	4.6 bar/66 psi
	Trelleborg	T440	6.0 bar/87 psi
	Trelleborg	T480	6.0 bar/87 psi
710/40 x 24.5	Firestone	Forestry EL	5.0 bar/73 psi

Tires			
Dimension	Brand	Model	Max.pres.
710/45 x 26.5	Nokian	FK F (16)	4.6 bar/67 psi
	Nokian	FK F (20)	5.5 bar/80 psi
	Trelleborg	T428 151/158	4.5 bar/65 psi
	Trelleborg	T428 163/170	6.0 bar/87 psi
	Nokian	TRS 2 (20)	5.5 bar/80 psi
	Nokian	F2 (20)	5.5 bar/80 psi
	Nokian	F2 (24)	6.0 bar/87 psi
	Trelleborg	T440	6.0 bar/87 psi
	Trelleborg	T480 (20)	6.0 bar/87 psi
	Trelleborg	T480 (24)	6.0 bar/87 psi
	Firestone	Forestry EL	5.0 bar/73 psi
	Nokian	F2 (24)	6.0 bar/87 psi
750/50 x 26.5	Trelleborg	T428 163/170	5.0 bar/73 psi
	Nokian	T428 170/177	6.0 bar/87 psi
	Nokian	FK F (20)	5.5 bar/80 psi
	Trelleborg	T428 160/167	6.0 bar/87 psi
	Trelleborg	T422 154/161	5.0 bar/73 psi
	Firestone	Forestry EL	3.9 bar/56 psi
	Nokian	TRS 2 (20)	5.5 bar/80 psi
	Trelleborg	T440	6.0 bar/87 psi
	Trelleborg	T480	6.0 bar/87 psi
	Trelleborg	T423	5.0 bar/73 psi
750/55 x 26.5	Nokian	ELS L-2 (20)	5.5 bar/80 psi
	Nokian	TRS L-2 (20)	5.5 bar/80 psi
	Nokian	FK F (20)	5.5 bar/80 psi
	Nokian	FK F2 (24)	6.0 bar/87 psi
	Trelleborg	T480	6.0 bar/87 psi
750/45 x 30.5	Trelleborg	T428 169/176	6.0 bar/87 psi
780/50 x 28.5	Nokian	F2 (24)	6.0 bar/87 psi
	Trelleborg	T480	6.0 bar/87 psi
780/55 x 26.5	Trelleborg	T480	6.0 bar/87 psi
800/40 x 26.5	Nokian	FK F (20)	5.0 bar/73 psi
	Trelleborg	T423	5.0 bar/73 psi

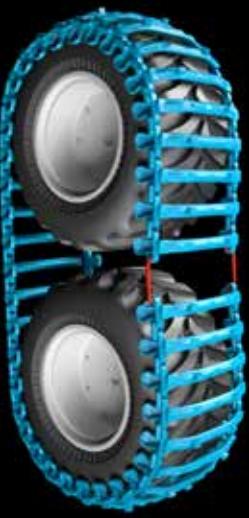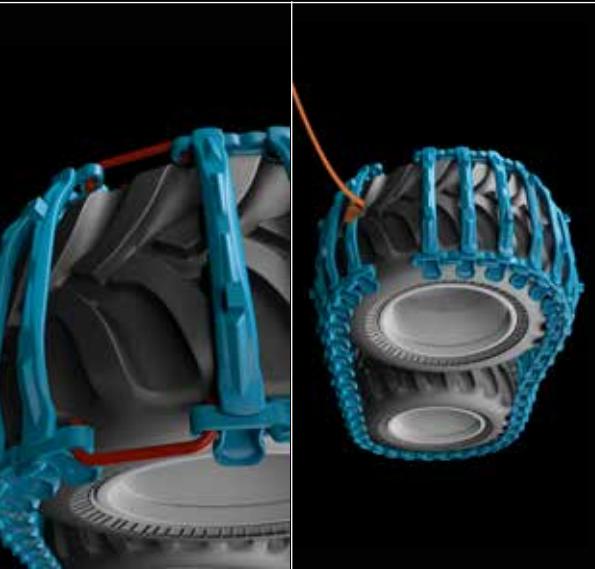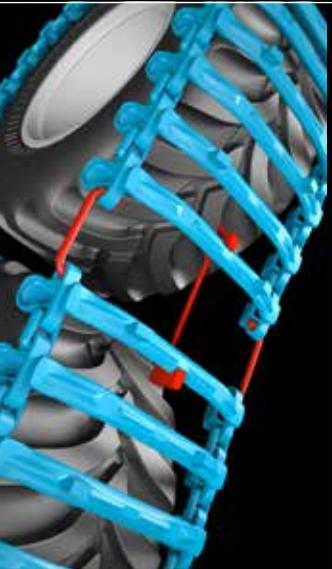

1
Unroll the track parts and screw them together with large track lock. Drive over the track on the bogie using straps/small chain.

2
When the track is on the bogie make sure that the ends are at one end of the bogie.


3
Mount the two clamps from the outside into the link hooks.

4
Drive slowly forward until the clamps are between the bogie wheels. NOTE: If the tires are new, it helps mount significantly, if you moistens them. It may also be needed to help push up the track from the short edge towards the top.


5
Mounting tool – tensioner – with screw.

6
Mount the installation tool on the cross members from below. Make sure that it is in the middle. Then use a ratchet shaft screwing together the stretcher with. Don't pull harder than necessary. Pay attention so as not the cross member turns.

7
When the clamps are loose, remove them from the track.

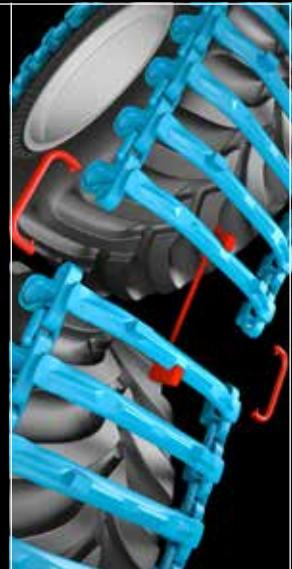


8
Tighten the track until you can install the track lock.

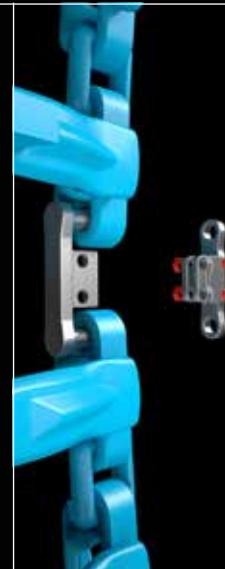


9
Mount the track lock plate.



10
Mount the bolt from above because of the risk of damage the nut during driving.

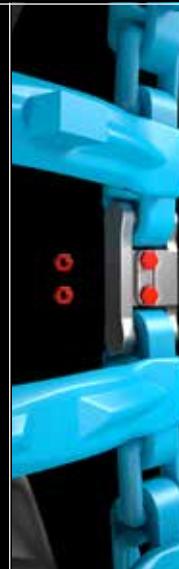


11
Take out the tool. The proper tensioning of the track is when slack between tires is max. 50 mm.

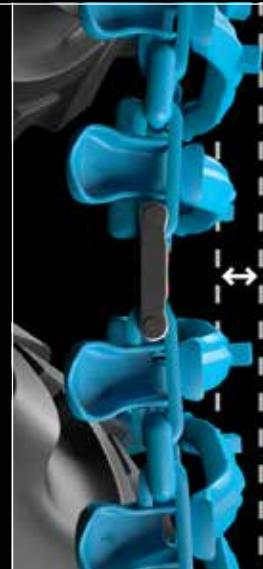


Part.no	Track Model
036-468510	ECO
036-468511	OF
036-468513	U
036-468514	BALTIC
036-468518	EVO
036-490740	EX
036-468250	KOVAX
036-468260	COVERX
036-468270	COVERX M
035-470130	SPARE U CLAMP

Tracks Shortening Instructions

To always insure that your Eco-Tracks have the right tensile strength, we provide an easy solution to shorten your tracks. Natural wear will cause any bogie tracks to loosen, however shortening the tracks will increase the lifespan and capacity of your product.

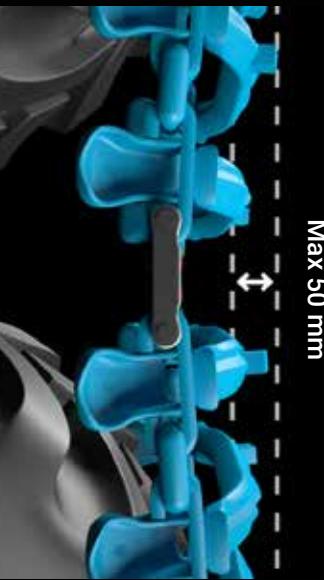


Example 294-644421 EVO-Soft 710 x 26.5"

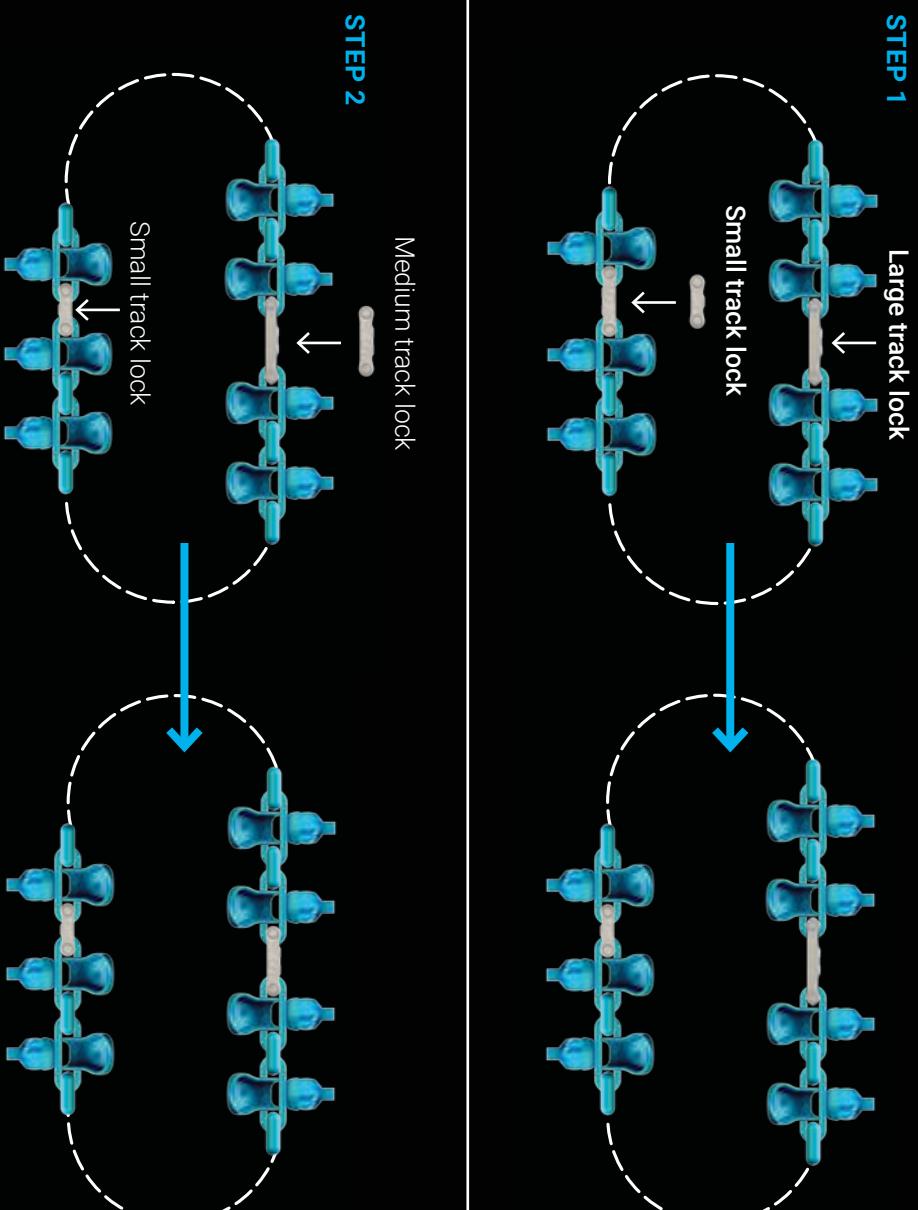


STEP 3

Small track lock

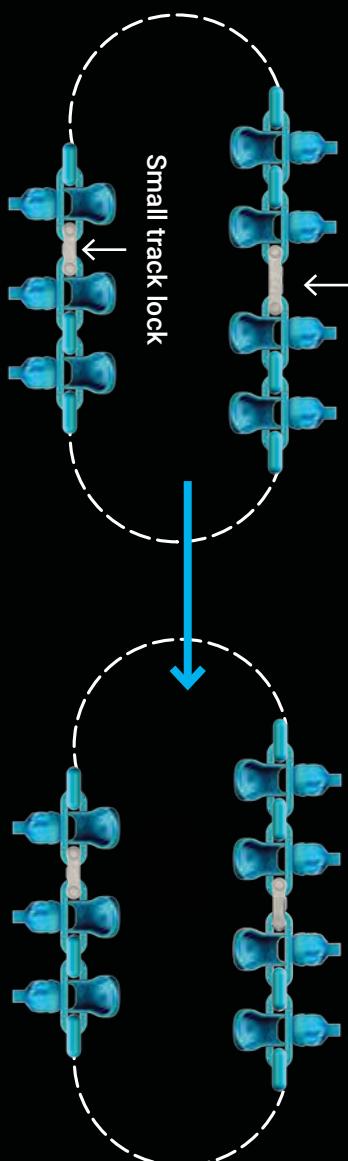

STEP 4

Large track lock
Remove 1 pcs
of crossbar and link

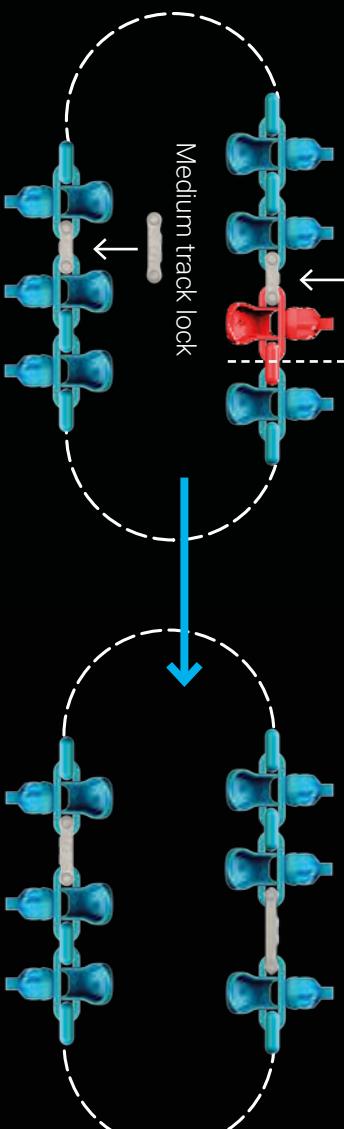

IF FURTHER SHORTENING IS
REQUIRED REPEAT STEP 1-4



Manufacturing

Olofsfors AB has the world's most modern and efficient tracks-production, fully automated with over 25 robots.

The tracks are made from carbon manganese steel, alloyed with boron by a special metallurgical treatment. The steel has good welding properties and wear characteristics.

Our cross members is manufactured from scrap-based steel.

Scrap-based manufacturing generates lower carbon dioxide emissions than steel production using iron ore. Through effective scrap management, we also preserve the alloying substances contained in the scrap, thus reducing the need to add additional alloy, which leads to both economic and environmental gains.

All our tracks are heat treated after the welding process which gives higher quality.

Quality

We have been ISO 9001 certified since 1997 and our quality objectives are well supported by each department of the company.

Environment


We have been environmentally-certified in accordance with ISO 14001 certified since September 2002. Personnel are trained and continuously prompted to carry out their own tasks in an environmentally responsible manner.

The raw material we use for the tracks, are scrap based(recycled).

The climate declaration of scrap based material, shows the emissions of greenhouse gases, expressed as CO equivalents, is less than 500 kg CO₂ per 1000 kg produced hot rolled material.

Its more than half as much, as if we should use ore based raw material.

All our tracks are possible to recycle.

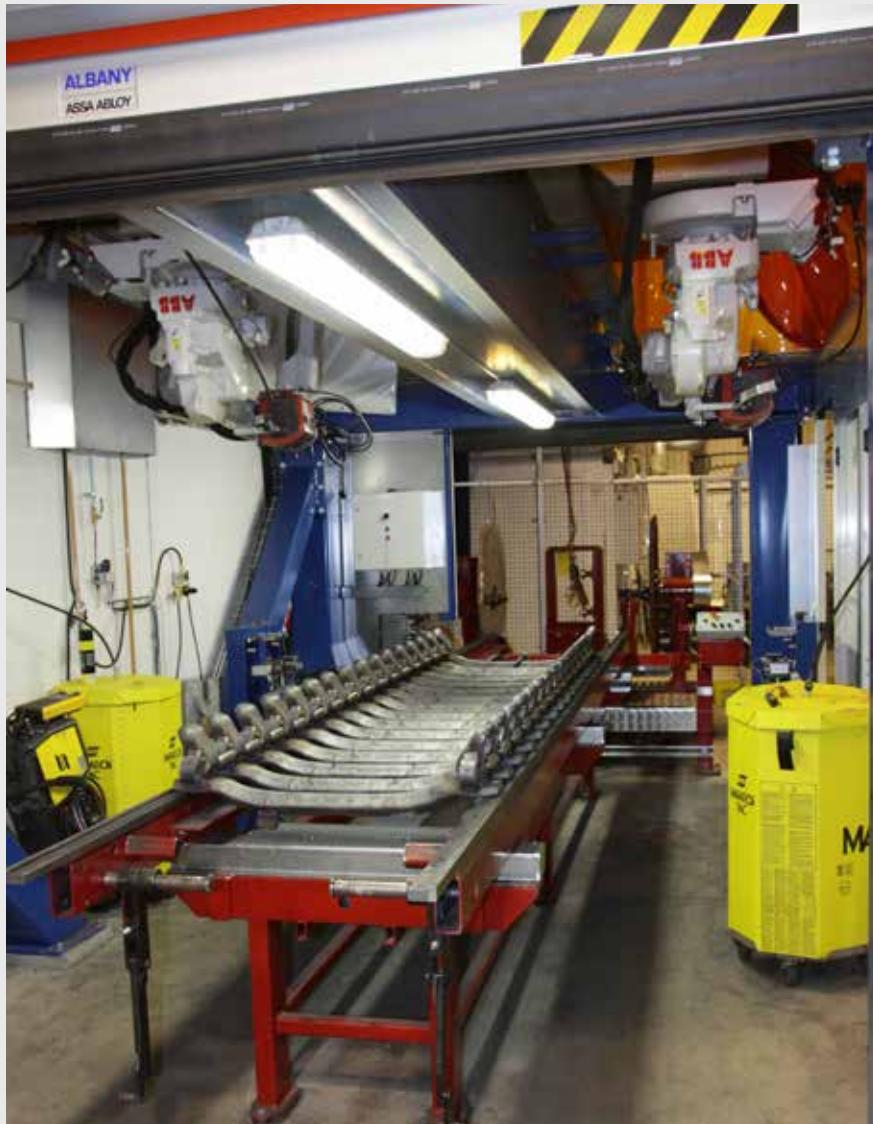

Olofsfors AB is the world leader in tracks for rubber tyre forestry machines.

It is important to constantly put the customer in focus, be responsive. Produce and develop what the market wants.

Olofsfors has the most complete range of tracks on the market with continued development of new track products. Bogie Tracks and Wheel Tracks for forwarders, harvesters, skidders and other rubber tired machines. We also sell tyre chains for harvesters and forwarders. The use of tracks significantly reduces ground damage in the forest while also improving machine performance and protecting tires.

