
MANUAL FOR GEARED TRACK TENSIONING TOOL



Please read through and understand
this manual before using the tensioning tool.
Original manual

January 2025 EN_1

Explanation of symbols



Warning!

The track tensioning tool can be dangerous. Careless or incorrect use can result in serious injury. Please read through the manual carefully and understand its contents before using the tensioning tool.



Risk of crushing

There is a risk of crushing when using the track tensioning tool.



Manual

Read through the manual carefully and understand its contents before using the tensioning tool.



Safety boots

Always wear safety boots with steel toecaps and anti-slip soles.



Hard hat

Always wear an approved hard hat.



Protective goggles

Always wear protective goggles or a visor when cleaning.



Protective gloves

Always wear protective gloves.

Hi-Vis vest

Always wear a high visibility vest



around the base machine.

Declaration of conformity

In accordance with the EC's Machinery Directive 98/37/EC
Certificate in accordance with 98/37/EC, Appendix 2A.

Manufacturer Olofsfors AB
Olofsfors 11
SE-914 91 Nordmaling, Sweden

Machine no.: 035-489400 Geared track tension tool including
035-489300 Gear housing

Serial no.: 128300->

The manufacturer hereby declares that the equipment supplied is in compliance with the following directive and national standards.

98/37/EC Machinery Directive, MD

The equipment is subject to the EC Directive for CE Marking, which is why an inspection of the machine has been performed. In this document, we (Olofsfors AB) explain the method used to comply with applicable EC directives with associated harmonised standards, as well as Swedish legislation and ordinances.
Standard EN ISO 12100-1,-2 has been used as the basis for this declaration.

Reservation:


The equipment may only be used for its intended purpose.

Olofsfors, date 2008-12-03


Niklas Swanemar, MD

Technical description

With the aid of a impact wrench, this tool is designed to mechanically tension Olofsfors bogie tracks on base machines fitted with rubber tires. (e.g. harvesters, forwarders).

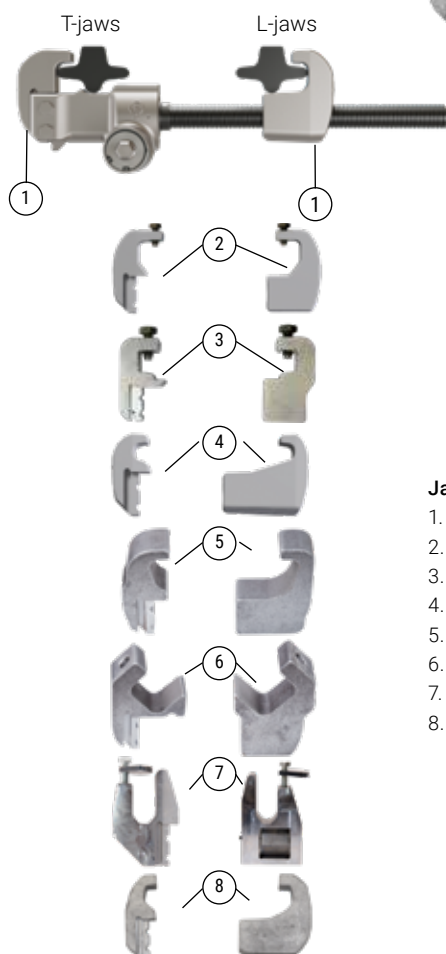


Jaw kits

1. ECO	035-489410
2. OF/OF+	035-489420
3. KovaX/KovaX+	035-489530
4. Baltic	035-489430
5. U	035-489440
6. EVO	035-489470
7. EX	035-489480
8. CoverX, CoverB	035-489520

Safety instructions




Risk area.

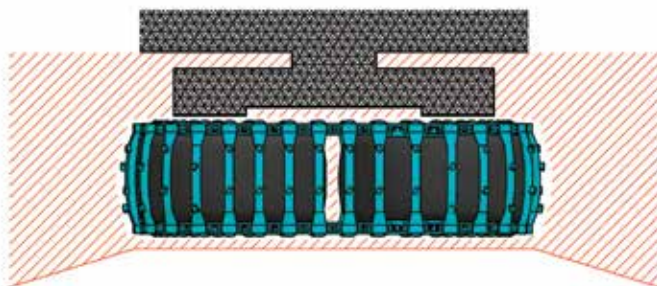

Be aware of the risk area around the base machine.



There is risk of crushing around track tensioning tool and tracks. Don't place arm/hand inside the track during tensioning, always use the included extension. The tensioner is designed for Olofsfors tracks. Usage for other track brands is prohibited since this could cause incorrect loads that can damage the tensioner.

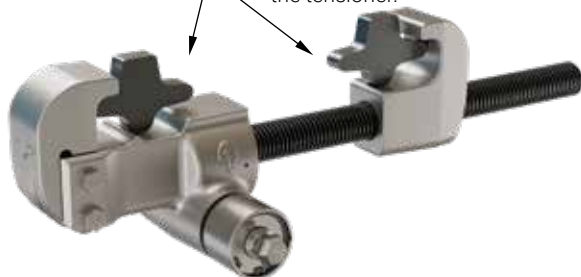

Incorrect assembly. Read and understand the assembly instructions for tracks before using the tensioning tool.






Warning: The track can jam when pulled over the wheels.

Safety instructions

Be aware of the base machine's mobility.

Use  Hi-Vis vest,  hard hat and  safety boots.

   Ensure that you have eye contact with the base machine's operator before approaching.




Use  protective goggles and  protective gloves during cleaning.



The tensioner is fitted with an over-loading protection mechanism that limits the input torque to around 18Nm.



To cut steel strapping during unpacking, place the track upright on a flat surface to avoid the risk of the track rolling away.

Use  protective gloves,
 protective goggles and  safety boots.



This tensioning tool must not be used for anything other than tensioning Olofsfors bogie tracks, in accordance with assembly/dismantling instructions (see page 23).

Assembly of geared track tensioning tool



- Remove the M10 screws (18) and insert the chosen T-jaw down into the groove.
- Replace and tighten the M10 screws (18).
- Thread the chosen L-jaw onto the spindle. Ensure that the L-jaw is safely seated on the spindle. Never exceed the distance 280mm during tensioning! See picture below.
- Always use the included extensioner to ensure that you are outside of the risk area during track tensioning.

In addition to the track tensioning kit, the following equipment is also required:

The recommended personal safety equipment

M10 tool (A/F=16 mm)

M12 tool (A/F=19 mm)

M14 tool (A/F=22 mm)

M20 tool (A/F=30 mm)

Impact wrench


Strap

Hammer

Wire cutter

Pry bar

Crane

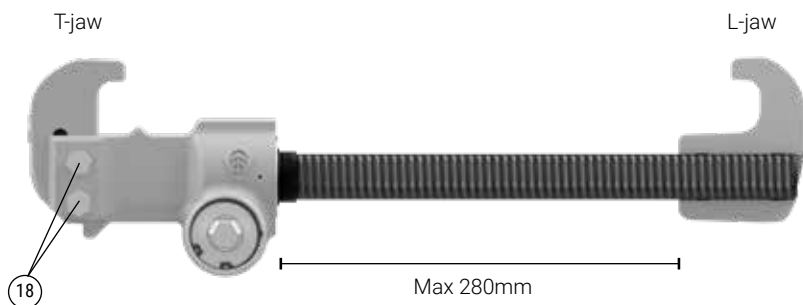


Assembly Instruction Bogie-Tracks



The track pair is supplied as 4 rolls on 2 pallets. The rolls on the same pallet is to be connected with each other. Never mix tracks from different pallets!



Ensure that the information on the track marking tags corresponds with the attached documents.

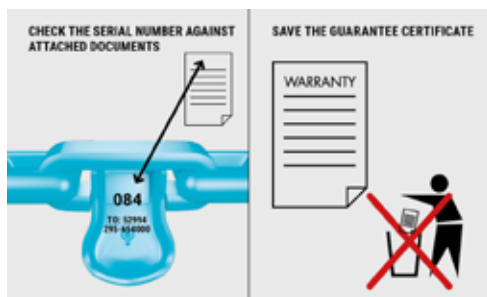

Save the warranty certificate!

Place the track pallets on even ground and cut the plastic straps. Exercise caution! Overturn the roll using the machine crane.

Lay out the tracks straight, with the side supports facing down. Assemble the 2 track halves with the medium length track locks.

Assembly instructions



1. Secure a strap around the outermost cross member, pass the strap over the tire and drive over the strap with the bogie to pull up the tracks.



2. Stop the machine when the track is positioned according to the picture.



3. Mount the two clamps from the outside into the link hooks.



4. Drive slowly forward until the clamps are between the bogie wheels.



5. Mount the tensioner from underneath and make sure it's in the middle of the cross bar. **ATTENTION!** Wet new tires with water to ease installation. Use a pry bar if the track cross bars gets stuck in the tire pattern.



6. Use the impact wrench with the extensioner and tighten the track slightly.



7. Remove the clamps.


Assembly instructions



8. Continue tightening the track until a suitable track lock can be fitted. The lock must be mounted from the inside.



9. Install the track lock plate.



10. Mount the screws from above. This protects the nut and protruding thread from damage when driving.



11. Reverse the impact wrench to release the tensioner from the cross members. Remove the tensioner. Correct track tension is achieved when the sag between the tires is no more than 50mm (2").

Dismantling bogie tracks



Fit the tensioner and follow the assembly instruction in the reverse order.

Maintenance



Spindle – straightness

Check the straightness of the spindle. Replace the spindle if it is bent.

Cleaning the spindle

If the spindle becomes dirty, it must be brushed clean and regreased.
Use gloves and protective goggles when the spindle is brushed clean.

Check that there are no cracks in the gear or jaws

If there are cracks in the gear or jaws, these must be discarded.

Check that the clamps are at a right angle

If the clamps are bent, they must be discarded.

Check play on the gear

Maximum permitted input shaft play is 45°.

If the play is greater than this, the gear must be discarded.

If the claw has a clamping screw, check to ensure it turns easily. If the screw is difficult to turn it is damaged and should be replaced before the threads in the claw are destroyed.

Technical data

Technical data

Weight, tensioning tool without jaws	10 kg / 22 lbs
Weight, tensioning tool with jaws	max 15 kg / 33 lbs
Min. operating temp.	-30 °C / -22F

Spare parts list

1. Extension	035-489396
2. Socket 22mm	035-489397
3. Clamps	035-470130
4. Grease	035-489372
5. Brush	035-489375
6. Case	035-489360
7. Spindle	035-489290
8. Screw M6S	
M10x60 10.9	950-500450
9. Clamping screw M20	
OF, EVO, KovaX/KovaX+	035-489382

